


Łożysko liniowe w obudowie krótkiej SMA_SUU

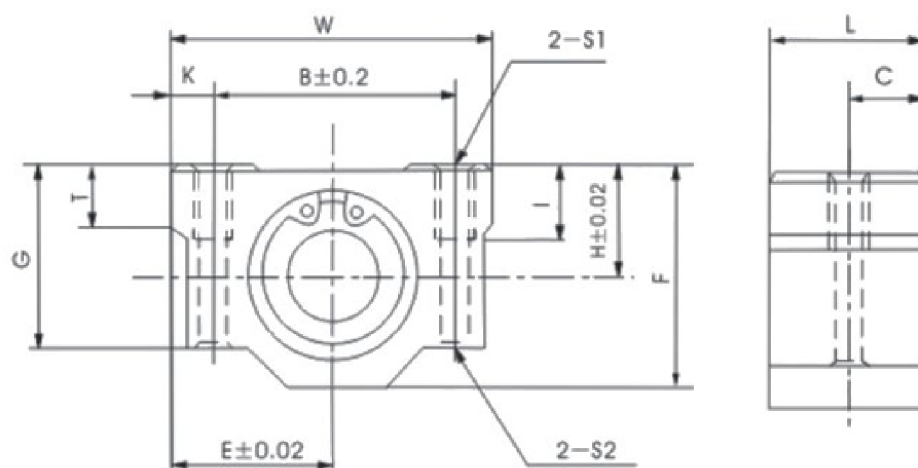

Nazwa	Średnica wału	Wymiary [mm]							Wymiary montażowe						Waga[Kg]
		H	E	W	L	F	G	T	B	C	K	S1	S2	I	
SMA8SUU	8	11	17	34	15.5	22	18	6	24	7.75	5	M4	3.4	8	0.027
SMA10SUU	10	13	20	40	20	26	21	8	28	10	6	M5	4.3	12	0.053
SMA12SUU	12	15	21	42	21	28	24	8	30.5	10.5	5.75	M5	4.3	12	0.06
SMA13SUU	13	15	22	44	20.6	30	24.5	8	33	10.3	5.5	M5	4.3	12	0.064
SMA16SUU	16	19	25	50	24.1	38.5	32.5	9	36	12.05	7	M5	4.3	12	0.11
SMA20SUU	20	21	27	54	28.1	41	35	11	40	14.05	7	M6	5.2	12	0.144
SMA25SUU	25	26	38	76	38	51.5	42	12	54	19	11	M8	7	18	0.34
SMA30SUU	30	30	39	78	41.5	59.5	49	15	58	20.75	10	M8	7	18	0.424
SMA35SUU	35	34	45	90	45.5	68	54	18	70	22.75	10	M8	7	18	0.626
SMA40SUU	40	40	51	102	56.5	78	62	20	80	28.25	11	M10	8.7	25	1
SMA50SUU	50	52	61	122	69	102	80	25	100	34.5	11	M10	8.7	25	2.1