

LED BATTEN LIGHT


Product&Family Code: 052 003 0060

TETRA-18


Technical Data

| | |
|---|--------------------|
| Voltage (V) | 176-265V |
| Product Wattage (W) | 18 |
| Equivalence with incandescent lamp(W) | 144 |
| Colour Render Index (Ra) | >Ra70 |
| Colour Temperature (K) | 6400K |
| Materials | PS + METAL |
| Protection Class | II |
| Dimmable | No |
| EEI | - |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm) | 1135 |
| Luminous Efficacy (lm/W) | 63 |
| Rated Life (hrs) ⌚ | 20.000 |
| IP Rating | 20 |
| Power Factor | >0.5 |
| Beam Angle | 120° |
| Size (cm) | 60 |
| Number of ON-OFF cycling | x10.000 |

Technical Drawing

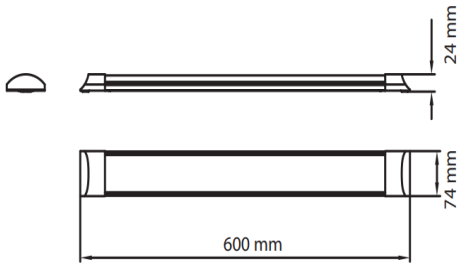

Photometric Diagram

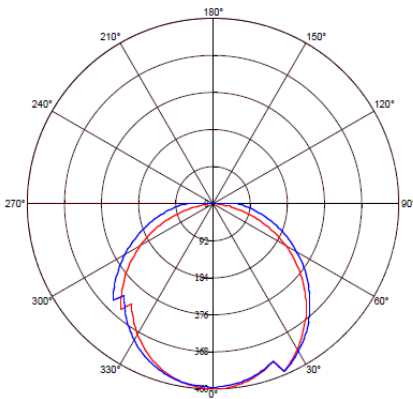

☐ C0 Plane beam angle(50%) ☐ C90 Plane beam angle(50%)
C0 Plane beam angle(50%):113.7(DEG) C90 Plane beam angle(50%):124.2(DEG)

Applications

- Designed indoor applications.



Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

