

## DS-K1T809MX Card Reader



- Slim and flexible design with metal.
- Max. 1000 cards and 1000 users.
- Built-in card reader for M1 card reading.
- Outdoor application, supports IP65.
- Supports multiple authentication types: card, PIN.


## ▪ Specification

Interface	
Lock control	1
Exit button	1
Door contact input	1
Alarm output	1
Wiegand	Wiegand out, supports Wiegand 26/34
Capacity	
User capacity	1000
Card capacity	1000
Authentication	
Card type	M1 card
Card reading distance	3 cm
Card reading duration	1 s
General	
Button	Physical buttons
Indicator	Support
Power supply	12 VDC, 1 A
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 % to 90 % (no condensing)
Dimensions	151 mm × 48 mm × 21.5 mm (5.9" × 1.9" × 0.8")
Weight	Net weight: 220.3 g (0.5 lb) Rough weight: 352 g (0.8 lb)

## ▪ Available Model

DS-K1T809MX

## ▪ Dimension

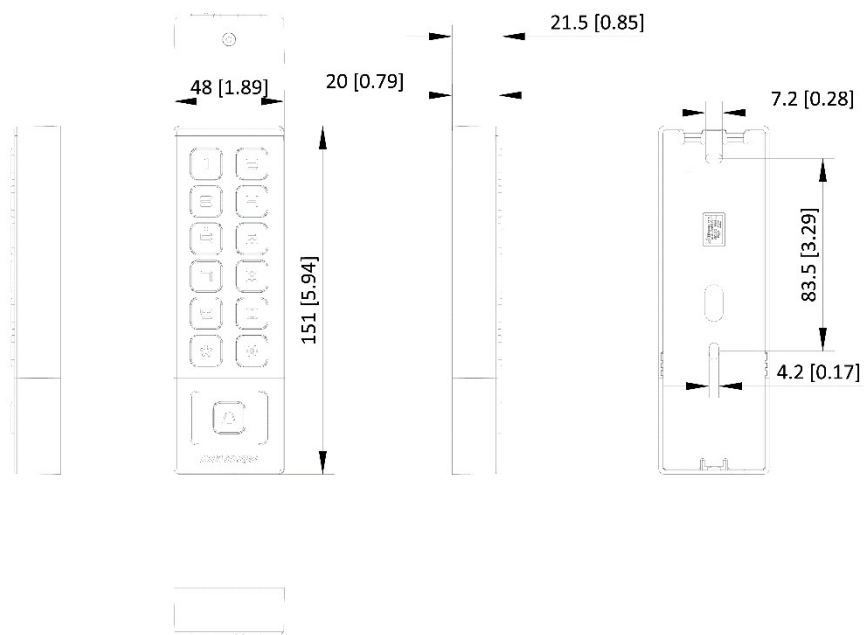

Unit: mm [inch]

SCALE 1:1

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq