



Łożysko liniowe zamknięte LM_UU

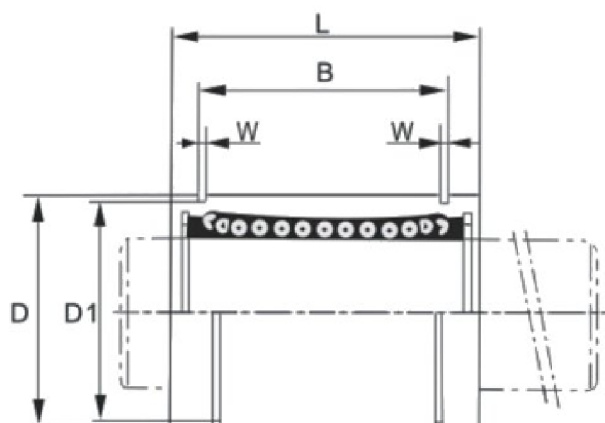

Nazwa	Liczba obiegów kulek	Wymiary [mm]										Nieosłowość	Nośność		Waga [g]
		Średnia wewnętrzna		Średnia zewnętrzna		Długość		Długość montażowa			W		Dynamiczna C[kgf]	Statyczna Co[kgf]	
		dr	Tolerancja	D	Tolerancja	L	Tolerancja	B	Tolerancja	D1					
LM3UU	4	3	0 -0.008	7	0 -0.009	10	0 -0.12					0.008	7	11	
LM4UU	4	4	0 -0.008	8	0 -0.009	12	0 -0.12					0.008	9	13	3
LM5UU	4	5	0 -0.009	10	0 -0.009	15	0 -0.12	10.2	0 -0.2	9.6	1.1	0.008	17	21	4
LM6UU	4	6	0 -0.009	12	0 -0.011	19	0 -0.2	11.5	0 -0.2	14.3	1.1	0.012	21	27	6
LM8UU	4	8	0 -0.009	15	0 -0.011	24	0 -0.2	17.5	0 -0.2	14.3	1.1	0.012	27	41	14
LM10UU	4	10	0 -0.009	19	0 -0.013	29	0 -0.2	22	0 -0.2	18	1.3	0.012	38	56	28
LM12UU	4	12	0 -0.009	21	0 -0.013	30	0 -0.2	23	0 -0.2	20	1.3	0.012	42	61	32
LM13UU	4	13	0 -0.009	23	0 -0.013	32	0 -0.2	23	0 -0.2	22	1.3	0.012	52	79	38
LM16UU	5	16	0 -0.009	28	0 -0.013	37	0 -0.2	26.5	0 -0.2	27	1.6	0.012	79	120	74
LM20UU	5	20	0 -0.01	32	0 -0.016	42	0 -0.2	30.5	0 -0.2	30.5	1.6	0.015	88	140	80
LM25UU	6	25	0 -0.01	40	0 -0.016	59	0 -0.3	41	0 -0.3	38	1.85	0.015	100	160	206
LM30UU	6	30	0 -0.01	45	0 -0.016	64	0 -0.3	44.5	0 -0.3	43	1.85	0.015	160	220	240
LM35UU	6	35	0 -0.012	52	0 -0.019	70	0 -0.3	49.5	0 -0.3	49	2.1	0.02	170	320	370
LM40UU	6	40	0 -0.012	60	0 -0.019	80	0 -0.3	60.5	0 -0.3	57	2.1	0.02	220	410	589
LM50UU	6	50	0 -0.012	80	0 -0.019	100	0 -0.3	74	0 -0.3	76.5	3.15	0.02	390	810	1480
LM60UU	6	60	0 -0.015	90	0 -0.022	110	0 -0.3	85	0 -0.3	86.5	3.15	0.025	480	1020	1750