

1.3 GHz PLL with I²C Bus for TV Tuner

Description

The U6205B is a single chip frequency synthesizer with unidirectional I²C bus control. This IC contains a high

frequency prescaler which can be switched off. 3 open collector switching outputs are available.

Features

- 1.3 GHz divide-by-8 prescaler integrated (can be bypassed)
- 15 bit counter accepts input frequencies up to 170 MHz
- μ P-controlled by I²C bus
- 3 switching outputs (open collector)
- 4 addresses selectable at Pin 7 for multituner application
- 62.5 kHz (–1.3 GHz)/ 7.8125 kHz (–170 MHz) tuning steps
- Electrostatic protection according to MIL-STD 883
- SO14 package

Block Diagram


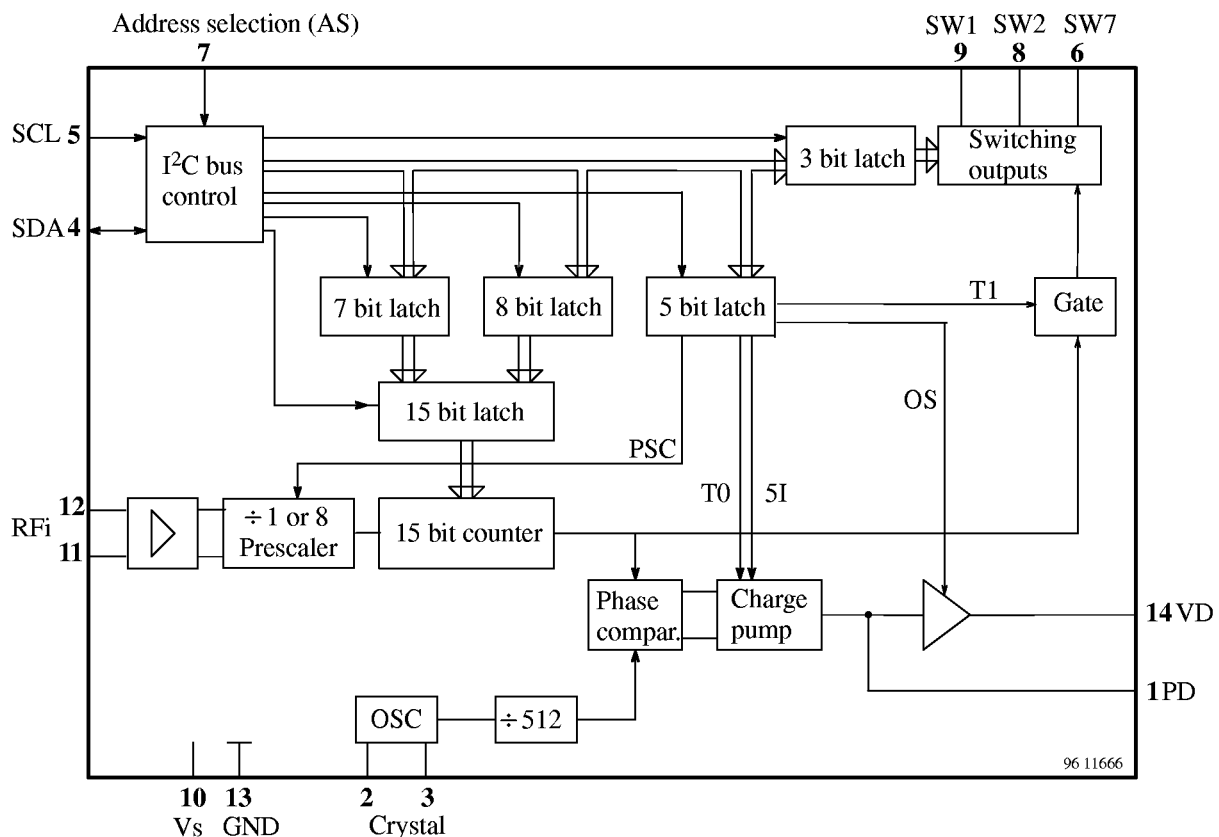


Figure 1.

Ordering Information

Extended Type Number	Package	Remarks
U6205B-FPG3	SO14 plastic package	Taped and reeled

Pin Description

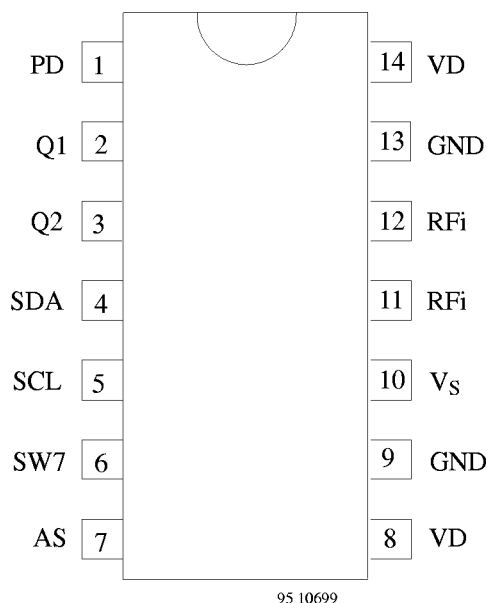

95 10699

Figure 2.

Pin	Symbol	Function
1	PD	Charge pump output
2	Q1	Crystal
3	Q2	Crystal
4	SDA	Data in/output
5	SCL	Clock
6	SW7	Switching output (open collector)
7	AS	Address select
8	SW2	Switching output (open collector)
9	SW1	Switching output (open collector)
10	V _S	Supply voltage
11	RFi	RF input
12	RFi	RF input
13	GND	Ground
14	VD	Active filter output

Absolute Maximum Ratings

All voltages are referred to GND (Pin 13).

Parameters		Symbol	Min.	Typ.	Max.	Unit
Supply voltage	Pin 10	V _S	-0.3		6	V
RF input voltage	Pin 11, 12	RFi	-0.3		V _S	V
Bus input/ output voltage	Pin 4	VSDA	-0.3		V _S	V
	Pin 5	VSCL	-0.3		V _S	V
SDA output current (open collector)	Pin 4	ISDA	-1		5	mA
Address select voltage	Pin 7	VAS	-0.3		V _S	V
Current switching outputs (open collector)	Pin 9, 8, 6	SW 1, 2, 7	-1		15	mA
Junction temperature		T _j	-40		125	°C
Storage temperature		T _{stg}	-40		125	°C

Operating Range

All voltages are referred to GND (Pin 13).

Parameters	Test Conditions / Pins	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	Pin 10	V _S	4.5		5.5	V
Ambient temperature		T _{amb}	0		70	°C
Input frequency	PSC = 1 Pin 11, 12	RFi	64		1300	MHz
Input frequency	PSC = 0 Pin 11, 12	RFi	1		170	MHz
Prog. divider		SF	256		32767	

Thermal Resistance

Parameters	Test Conditions / Pins	Symbol	Min.	Typ.	Max.	Unit
Junction ambient	SO14 package	R _{thJA}			120	K/W

Electrical Characteristics

Test conditions (unless otherwise specified) $V_S = 5\text{ V}$, $T_{\text{amb}} = 25^\circ\text{C}$

Parameters	Test Conditions / Pins		Symbol	Min.	Typ.	Max.	Unit
Supply current	Pin 10						
	SW 1, 2, 7 = 0; PSC = 1		I _s	32	42	52	mA
	SW 1, 2, 7 = 0; PSC = 0		I _s	22	28	35	mA
Input sensitivity							
f _i = 80 - 1000 MHz	PSC = 1	Pin 11	V _i ¹⁾			10	mV
f _i = 1300 MHz	PSC = 1	Pin 11	V _i ¹⁾			40	mV
f _i = 10 - 220 MHz	PSC = 0	Pin 11	V _i ¹⁾			10	mV
Maximum input signal	PSC = 0 / 1	Pin 11	V _{imax} ¹⁾	315			mV
Open collect or switching outputs (SW 1, 2, 7) Pin 9, 8, 6							
Reverse current	V _H = 13.5 V		IR _H			10	μA
Saturation voltage	I _L = 10 mA		V _{SL} ²⁾			0.5	V
Phase detector output							
Charge pump current “H”	5I = 1, V _{PD} = 2 V, Pin 1		IP _{DH}		±180		μA
Charge pump current “L”	5I = 0, V _{PD} = 2 V, Pin 1		IP _{DL}		±50		μA
Charge pump leakage current	T ₀ = 0, V _{PD} = 2 V, Pin 1		IP _{DTRI}		±5		nA
Bus inputs (SDA,SCL)							
Input voltage	Pin 4, 5		V _i “H”	3		5.5	V
	Pin 4, 5		V _i “L”			1.5	V
Input current	V _{SCL} “H” = V _s , Pin 4, 5		I _i “H”			10	μA
	V _{SCL} “L” = 0 V, Pin 4, 5		I _i “L”	−20			μA
Output voltage SDA (open collector)	I _{SDA} “L” = 2 mA , Pin 4		V _{SDA} “L”			0.4	V
Address selection (AS)							
Input current	V _{AS} “H” = V _s Pin 7		I _{iAS} “H”			10	μA
	V _{AS} “L” = 0 V Pin 7		I _{iAS} “L”	−100			μA

1) RMS-voltage calculated from the measured available power on 50 Ω .

2) Tested with one switch active.

I²C Bus Description

Data Formats

Description	Data Format								
	MSB						LSB		
Address byte	1	1	0	0	0	AS1	AS2	0	A
Progr. divider byte 1	0	n14	n13	n12	n11	n10	n9	n8	A
Progr. divider byte 2	n7	n6	n5	n4	n3	n2	n1	n0	A
Control byte 1	1	SI	T1	T0	X	X	PSC	OS	A
Control byte 2	SW7	X	X	X	X	SW2	SW1	X	A

A = Acknowledge; X = not used; Unused bits of control byte 2 should be 0 for lowest power consumption.

n0 ... n14:	Scaling factor (SF)	SF = 16384*n14 + 8192*n13 + ... + 2*n1 + n0
PSC	Prescaler on/off	PSC = 1: prescaler on (PSF = 8) PSC = 0: prescaler off (PSF = 1)
T0, T1	Testmode selection	T1 = 1: divider test mode on T1 = 0: divider test mode off T0 = 1: charge pump disable T0 = 0: charge pump enable
SW 1, 2, 7	Switching outputs	SW1, SW2, SW7 = 1: open collector active
SI	Charge pump current switch	SI = 1: high current SI = 0: low current
OS	Output switch	OS = 1: varicap drive disable OS = 0: varicap drive enable

AS1, AS2 Address selection Pin 7

AS1	AS2	Address	Dec. Value	Voltage at Pin7
0	1	1	194	open
0	0	2	192	0 to 10% Vs
1	0	3	196	40 to 60% Vs
1	1	4	198	90 to 100% Vs

Oscillator Frequency Calculation

$$f_{osc} = f_{ref} * SF * PSF$$

f_{osc} Locked oscillator frequency

f_{ref} Reference frequency 4 MHz / 512 = 7.8125 kHz

SF Scaling factor of programmable 15-bit-divider

PSF Scaling factor of prescaler

I²C Bus Description (continued)

Pulse Diagram

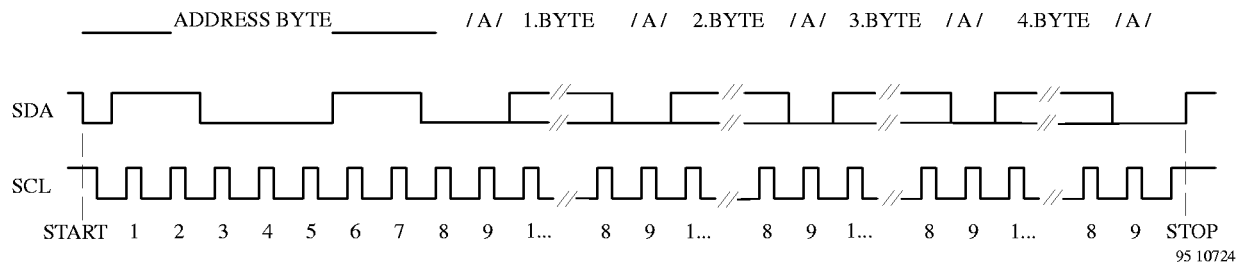


Figure 3.

Bus Timing

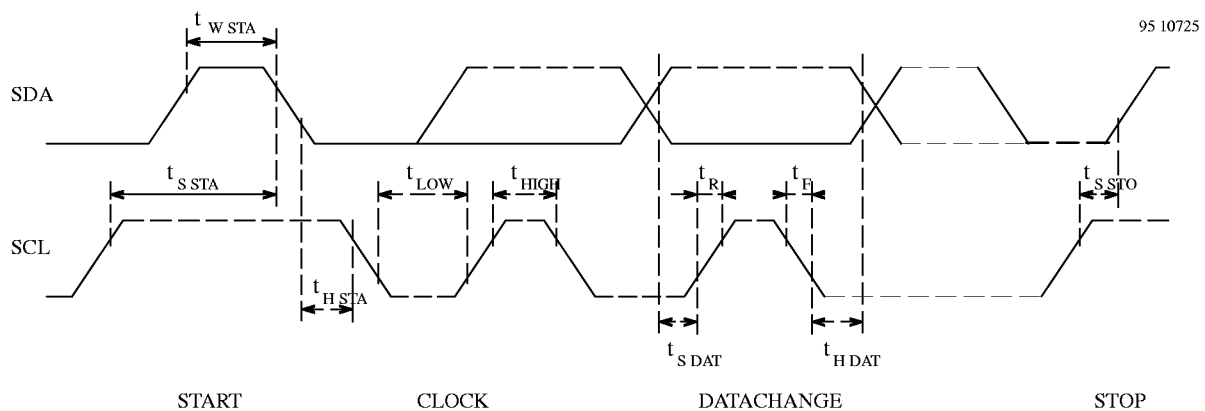


Figure 4.

Parameters	Symbol	Min.	Typ.	Max.	Unit
Bus timing					
Rise time SDA, SCL	tR			15	μs
Fall time SDA, SCL	tF			15	μs
Clock frequency SCL	fSCL	0		100	kHz
Clock "H" Pulse	tHIGH	4			μs
Clock "L" Pulse	tLOW	4			μs
Hold time start	tHSTA	4			μs
Set-up time stop	tSSTO	4			μs
Set-up time data	tSDAT	0.3			μs
Hold time data	tHDAT	0			μs

Typical Prescaler Input Sensitivity (PSC = 1)

V_i (mV RMS on 50Ω)

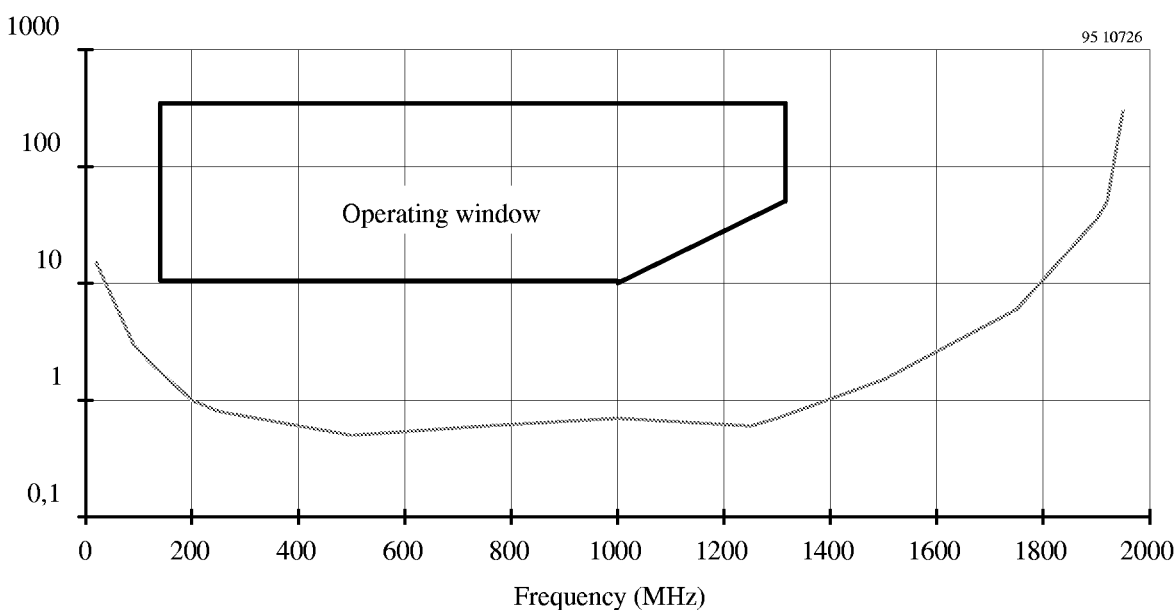


Figure 5.

Typical Prescaler Input Sensitivity (PSC = 0)

V_i (mV RMS on 50Ω)

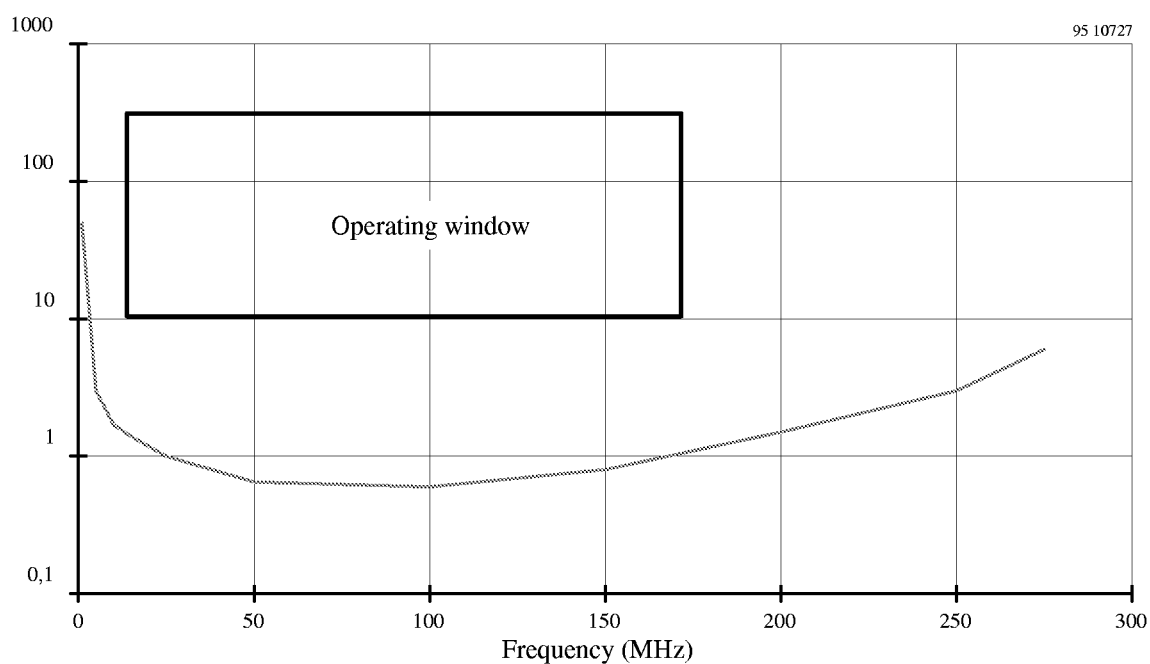


Figure 6.

Application Circuit


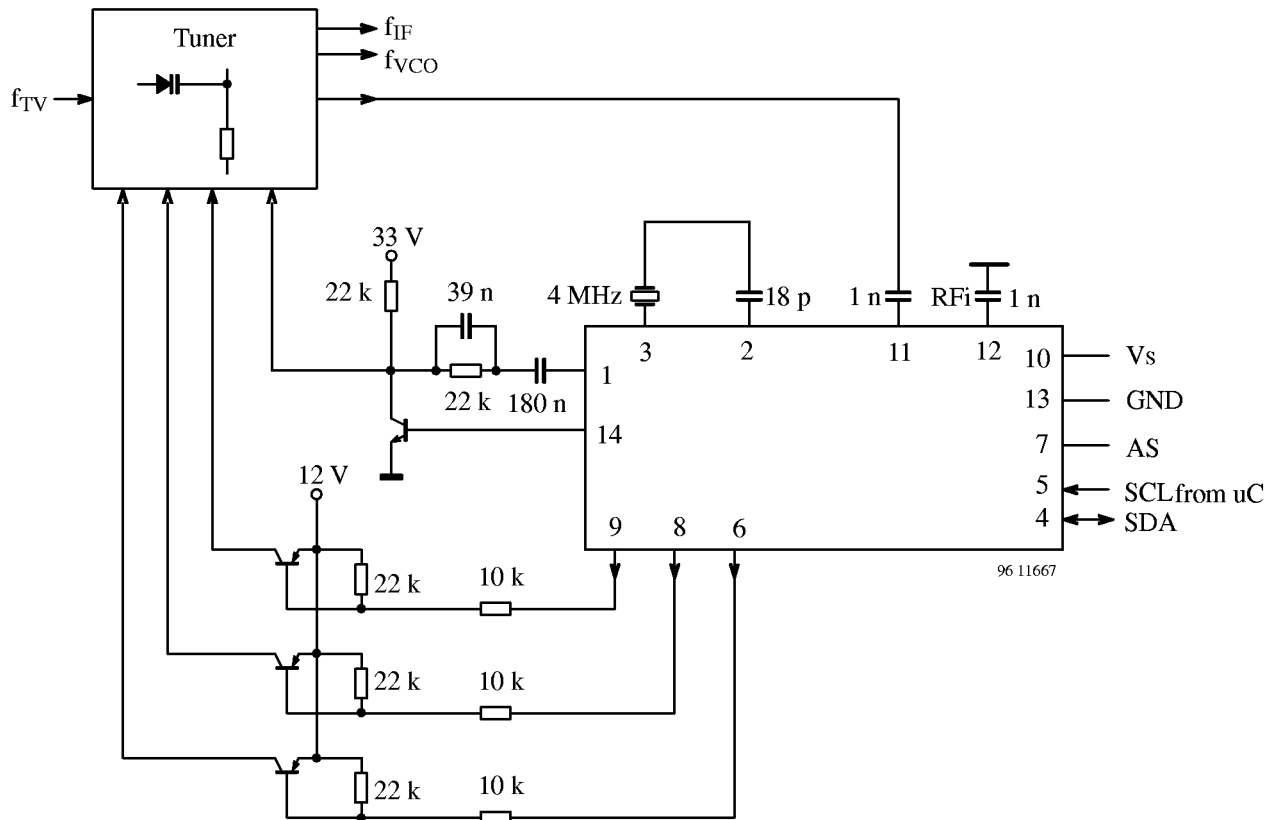


Figure 7.

Package Dimensions

Small outline plastic package, 14 pin-SO 14
Dimensions in mm

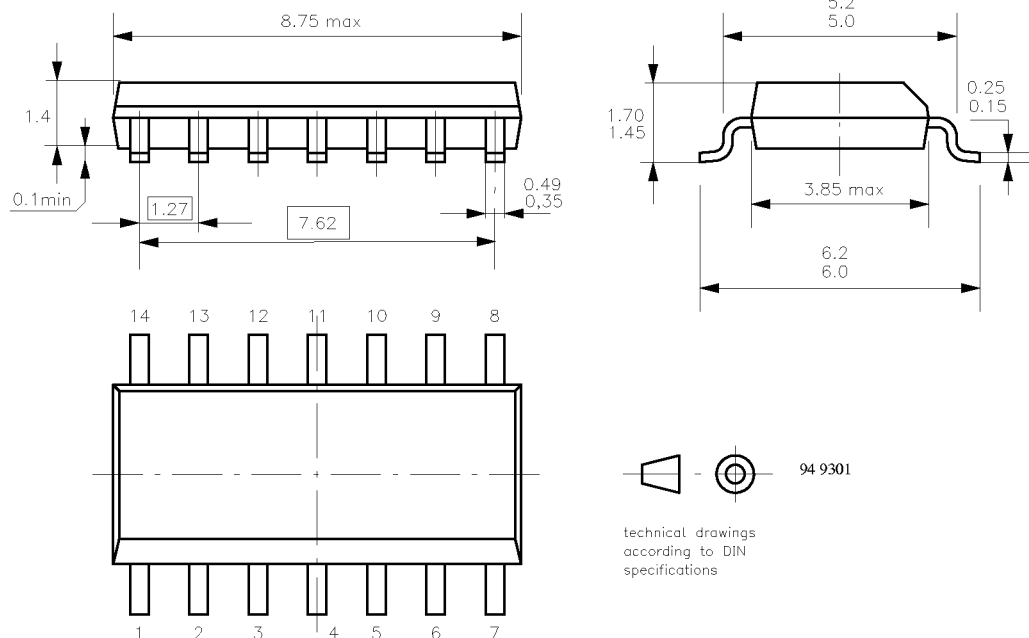

Ozone Depleting Substances Policy Statement

It is the policy of **TEMIC TELEFUNKEN microelectronic GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

TEMIC TELEFUNKEN microelectronic GmbH semiconductor division has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

TEMIC can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC TELEFUNKEN microelectronic GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423