

aR型电力保险丝 aR TYPE POWERFUSE



型号/尺寸 TYPE/SIZE	额定电流 CURRENT RATING	额定电压 VOLTAGE RATING	分断能力 BREAKING CAPACITY	安全认证 SAFETY APPROVALS		
				CCC	VDE	UR
HC08aR (8.5×31.5mm)	500mA	400V	20KA	○	○	○
	630mA	400V		○	○	○
	800mA	400V		○	○	○
	1A	400V		○	○	○
	1.25A	400V		○	○	○
	1.6A	400V		○	○	○
	2A	400V		○	○	○
	2.5A	400V		○	○	○
	3A	400V		○	○	○
	3.15A	400V		○	○	○
	4A	400V		○	○	○
	5A	400V		○	○	○
	6A	400V		○	○	○
	6.3A	400V		○	○	○
	7A	400V		○	○	○
	8A	400V		○	○	○
	9A	400V		○	○	○
	10A	400V		○	○	○
	12A	400V		○	○	○
	12.5A	400V		○	○	○
	15A	400V		○	○	○
	16A	400V		○	○	○
	20A	400V		○	○	○
	25A	400V		○	○	○
HC10aR (10.3×38mm)	250mA	500V/690V/1000V	 120KA (500V) 80KA (690V) 50KA (1000V)	●	●	●
	315mA	500V/690V/1000V		●	●	●
	400mA	500V/690V/1000V		●	●	●
	500mA	500V/690V/1000V		●	●	●
	630mA	500V/690V/1000V		●	●	●
	800mA	500V/690V/1000V		●	●	●
	1A	500V/690V/1000V		●	●	●
	1.25A	500V/690V/1000V		●	●	●
	1.6A	500V/690V/1000V		●	●	●
	2A	500V/690V/1000V		●	●	●
	2.5A	500V/690V/1000V		●	●	●
	3A	500V/690V/1000V		●	●	●
	3.15A	500V/690V/1000V		●	●	●
	4A	500V/690V/1000V		●	●	●
	5A	500V/690V/1000V		●	●	●
	6A	500V/690V/1000V		●	●	●
	6.3A	500V/690V/1000V		●	●	●
	7A	500V/690V/1000V		●	●	●
	8A	500V/690V/1000V		●	●	●
	9A	500V/690V/1000V		●	●	●
	10A	500V/690V/1000V		●	●	●
	12A	500V/690V/1000V		●	●	●
	12.5A	500V/690V/1000V		●	●	●
	15A	500V/690V/1000V		●	●	●
	16A	500V/690V/1000V		●	●	●
	20A	500V/690V/1000V		●	●	●
	25A	500V/690V/1000V		●	●	●
	30A	500V/690V/1000V		●	●	●
	32A	500V/690V/1000V		●	●	●
HC14aR 14.3×51mm HC22aR (22.2×58mm)	4A	500V/690V	120KA (500V) 80KA (690V)	○	○	○
	5A	500V/690V		○	○	○
	6A	500V/690V		○	○	○
	7A	500V/690V		○	○	○
	8A	500V/690V		○	○	○
	9A	500V/690V		○	○	○
	10A	500V/690V		○	○	○
	12A	500V/690V		○	○	○
	15A	500V/690V		○	○	○
	16A	500V/690V		○	○	○
HC22aR (22.2×58mm)	20A	500V/690V	120KA (500V)	○	○	○
	25A	500V/690V		○	○	○
	30A	500V/690V		○	○	○
	32A	500V/690V		○	○	○
HC22aR (22.2×58mm)	50A	500V	120KA (500V)	○	○	○
	63A	500V/690V		○	○	○
	80A	500V		○	○	○
HC22aR (22.2×58mm)	100A	500V		○	○	○


● DENOTES FOR APPROVED (●表示已取得认证)

○ DENOTES FOR PENDING (○表示申请中)



尺寸 DIMENSIONS:


单位 Unit:mm



尺寸/型号 SIZE/TYPE	HC08aR	HC10aR	HC14aR	HC22aR
A	8.5	10.3	14.3	22.2
B	31.5	38.0	51.0	58.0

HC10aR 平均 I-T 曲线图 (仅供参考)

HC10aR AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

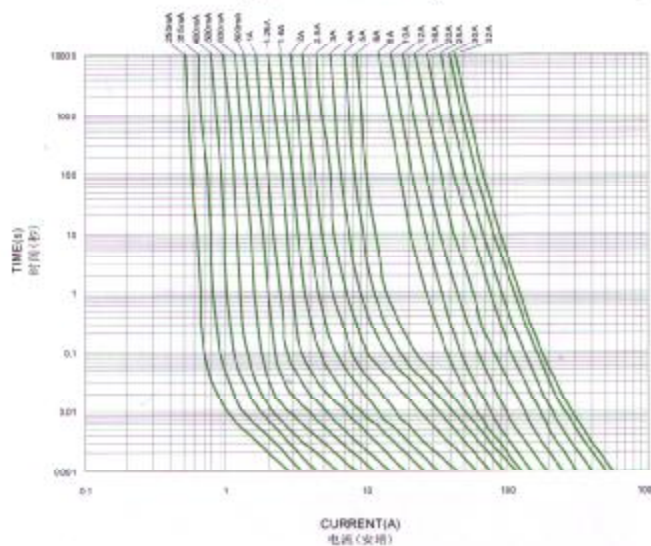

电气特性 ELECTRICAL CHARACTERISTICS:

额定 RATING		熔断时间 BLOWING TIME	
		250mA-5A	6A-32A
1.0In	最快Min.	4 hours	4 hours
	最慢Max.	1s	10s
4In	最快Min.	3ms	10ms
	最慢Max.	20ms	30ms