

Model:PE3015-M

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Pirmary voltage:  
110V/220V/230V,or producing as customerized.


Technical Index:

Technical Index: PCB  
Flame resistance : UL94-V0  
Insulation class: B  
Operation temperature: -30℃~+70℃  
Work frequency: 50Hz~60Hz  
Dielectric strength: 3.75KV 50Hz 1min


Technical Parameters table:

|                       |             |    |
|-----------------------|-------------|----|
| Primary voltage       | 110/220/230 | V  |
| Primary voltage range | ±10         | %  |
| Voltage regulation    | ≤30         | %  |
| Power                 | 1.8         | VA |
| Temperature rising    | ≤16         | ℃  |
| No load loss          | ≤0.4        | W  |
| weight                | 89          | g  |

Dimension（in mm）：


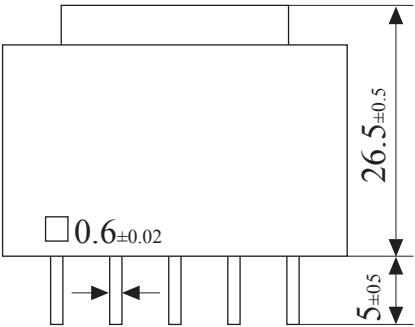


Front View

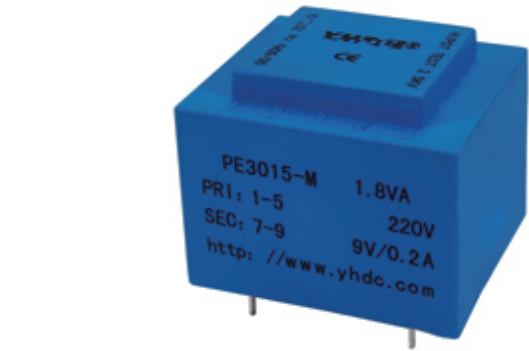

| Secondary voltage |        | Secondary no load voltage |         | Secondary full load current |          |
|-------------------|--------|---------------------------|---------|-----------------------------|----------|
| Single            | Double | Single                    | Double  | Single                      | Double   |
| 6V                | 6V×2   | 8.6V                      | 8.6V×2  | 300mA                       | 150mA×2  |
| 7.5V              | 7.5V×2 | 10.7V                     | 10.7V×2 | 240mA                       | 120mA×2  |
| 9V                | 9V×2   | 12.9V                     | 12.9V×2 | 200mA                       | 100mA×2  |
| 12V               | 12V×2  | 17V                       | 17V×2   | 150mA                       | 75mA×2   |
| 15V               | 15V×2  | 21.4V                     | 21.4V×2 | 120mA                       | 60mA×2   |
| 18V               | 18V×2  | 25.7V                     | 25.7V×2 | 100mA                       | 50mA×2   |
| 24V               | 24V×2  | 34V                       | 34V×2   | 75mA                        | 37.5mA×2 |

Schematic Diagram:

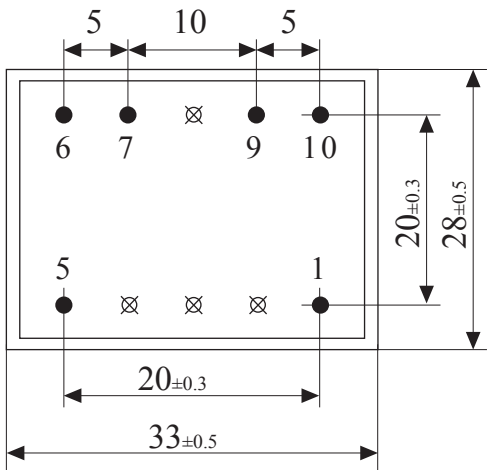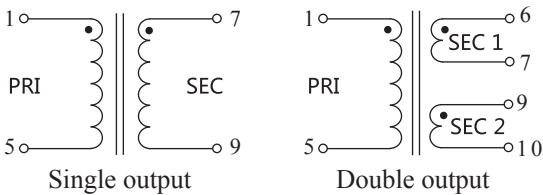

Bottom View