



Certificate of Compliance

No. HXT240902311885R2

Applicant : Wenzhou Youyang Electric Appliance Co., LTD.
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Manufacturer : Wenzhou Youyang Electric Appliance Co., LTD.
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Product : Cat toy ball
Model(s) : Y-805
Trademark : N/A
Test Standard(s) : EN IEC 55014-1: 2021;
EN IEC 55014-2: 2021.

The EUT described above has been tested by us with the listed standards and found in compliance with the Council EMC Directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with the EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: HXT240902311885R2.



Jan. 15, 2025

Shenzhen HuaXu Testing Technology Co., Ltd.

212, Building 3A, Yintian Industrial Zone, Yantian Community, Xixiang Street, Bao'an District,
Shenzhen, Guangdong, China.

HOTLINE:0755-28268723 Email: huaxujiance_prc@163.com Http:www.hxt-lab.com

CERTIFICATE OF CONFORMITY

No. : HX240702311287R1

Applicant : Wenzhou Youyang Electric Appliance Co., LTD

Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province

Manufacturer : Wenzhou Youyang Electric Appliance Co., LTD

Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province

Product : Pet toy ball

Model(s) : Y-802

Trademark : N/A

Test Standard(s) : EN IEC 55014-1: 2021;
EN IEC 55014-2: 2021.

The EUT described above has been tested by us with the listed standards and found in compliance with the Council EMC Directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with the EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test report number: HX240702311287R1.



Jan. 15, 2025

Shenzhen HX Detect Certification Co., Ltd.

101, building B12, Yintian Industrial Zone, Yantian community, Xixiang street, Bao'an District,
Shenzhen

HOTLINE:0755-29116082 Email: huaxunprc@163.com Http://www.hx-lab.com



Certificate of Compliance

No. HXT240902311887R2


Applicant : Wenzhou Youyang Electric Appliance Co., LTD.
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Manufacturer : Wenzhou Youyang Electric Appliance Co., LTD.
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Product : Cat toy ball
Model(s) : Y-805
Trademark : N/A
Test Standard(s) : IEC 62321-3-1: 2013, IEC 62321-4:2013+AMD1:2017, IEC
62321-5: 2013, IEC 62321-6: 2015, IEC 62321-7-1:2015, IEC
62321-7-2: 2017, IEC 62321-8: 2017.

The EUT described above has been examined by us with the listed standards and found in compliance with the Council RoHS Directive 2011/65/EU & (EU)2015/863. It is possible to use RoHS marking to demonstrate the compliance with the RoHS Directive.

The test data obtained and the report issued by laboratories other than HuaXu are provided by the applicant to us for data consolidation purpose. The report shall not be reproduced in part without written approval of us. It is only valid in connection with the test report number: HXT240902311887R2.



RoHS



(Manager)

Jan. 15, 2025

Shenzhen HuaXu Testing Technology Co., Ltd.

212, Building 3A, Yintian Industrial Zone, Yantian Community, Xixiang Street, Bao'an District,
Shenzhen, Guangdong, China.

HOTLINE:0755-28268723 Email: huaxujiance_prc@163.com Http:www.hxt-lab.com



Certificate of Compliance

No. HXT241102311970R1

Applicant : Wenzhou Youyang Electric Appliance Co., LTD
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Manufacturer : Wenzhou Youyang Electric Appliance Co., LTD
Address : No.34, Xiqiaotou Village, Shitang Community, Kunyang Town,
Pingyang County, Wenzhou City, Zhejiang Province
Product : Pet toy ball
Model(s) : Y-802
Trademark : N/A
Test Standard(s) : IEC 62321-3-1: 2013, IEC 62321-4: 2013+AMD1: 2017, IEC
62321-5: 2013, IEC 62321-6: 2015, IEC 62321-7-1:2015, IEC
62321-7-2: 2017, IEC 62321-8: 2017.

The EUT described above has been examined by us with the listed standards and found in compliance with the Council RoHS Directive 2011/65/EU & (EU)2015/863. It is possible to use RoHS marking to demonstrate the compliance with the RoHS Directive.

The test data obtained and the report issued by laboratories other than HuaXu are provided by the applicant to us for data consolidation purpose. The report shall not be reproduced in part without written approval of us. It is only valid in connection with the test report number: HXT241102311970R1.



RoHS



Shenzhen HuaXu Testing Technology Co., Ltd.

212, Building 3A, Yintian Industrial Zone, Yantian Community, Xixiang Street, Bao'an District,
Shenzhen, Guangdong, China.

HOTLINE:0755-28268723 **Email:** huaxujiance_prc@163.com **Http:**www.hxt-lab.com



材料安全数据表 MATERIAL SAFETY DATA SHEET

报告编号/Report No: STS2506938B02

Issued for

平阳县浪辰电子商务有限公司

Pingyang County Lang Chen e-commerce Co., LTD

浙江省温州市平阳县昆阳镇会文路20号

20 Huiwen Road, Kunyang Town, Pingyang County,
Wenzhou City, Zhejiang Province

产品名称: Product Name:	锂离子电池 Li-ion Battery
型号名称: Model Name:	PXM® 601520
标称电压: Nominal Voltage:	3.7V
额定容量: Rated Capacity:	150mAh
商标: Brand:	/
版本号: Version number:	V1.0



修订历史/Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	2025-06-24	STS2506938B02	ALL	Initial Issue



Section 1-化学品及企业标识 Chemical Product and Company Identification

产品名称Product Identification: 锂离子电池Li-ion Battery
商标Brand Name: /
型号名称Model Name: PXM® 601520
额定瓦时Rated Power: 0.555Wh
制造商 平阳县浪辰电子商务有限公司
Manufacture's/Supplier Name: Pingyang County Lang Chen e-commerce Co., LTD
地址 浙江省温州市平阳县昆阳镇会文路20号
Address: 20 Huiwen Road, Kunyang Town, Pingyang County, Wenzhou City, Zhejiang Province
联系人Connect Person: 陈先生/Mr.Chen
电话Telephone: +86-13322935756
电子邮箱Email: 13322935756@163.com
准备日期Preparation Date: 2025-06-24

This MSDS was prepared by Shenzhen STS Test Services Co., Ltd.

项目号Item Number: STS2506938B02
参考文献Referenced documents: ISO 11014:2009 Safety data sheet for chemical products

Compiled by : Taylor Du
(Taylor Du)

Technical Manager : Jordan Yi
(Jordan Yi)

Authorized Signatory : Bovey Yang
(Bovey Yang)





Section 2 –危险性概述 Hazards Identification

爆炸危险性 Explosive risk	该物品不属于爆炸危险品 This article does not belong to the explosion dangerous goods
易燃危险性 Flammable risk	该物品不属于易燃危险品 This article does not belong to the flammable material
氧化危险性 Oxidation risk	该物品不属于氧化危险品 This article does not belong to the oxidation of dangerous goods
毒害危险性 Toxic risk	该物品不属于毒害危险品 This article does not belong to the toxic dangerous goods
放射危险性 Radioactive risk	该物品不属于放射危险品 This article does not belong to the radiation of dangerous goods
腐蚀危险性 Mordant risk	该物品不属于腐蚀危险品 This article does not belong to the corrosion of dangerous goods
其他危险性 other risk	该电池瓦时率 0.555Wh, 属于锂离子电池（包括锂离子聚合物电池） Watt hour rate 0.555Wh, which belong to the Lithium ion batteries (including lithium ion polymer batteries)

Section 3 –成分/组成信息 Composition/Information on Ingredients

化学名称 Chemical Name	百分含量 Percentage content	CAS号 CAS Number
钴酸锂 Lithium Cobalt Oxide	35%	12190-79-3
石墨 Graphite	22%	7782-42-5
铜 Copper (Cu)	10%	7440-50-8
铝 Aluminium foil	5%	7429-90-5
碳酸乙烯酯 Ethylene carbonate	14%	7429-90-5
聚丙烯 Polypropylene	5%	96-49-1
碳酸甲乙酯 Carbonate, methyl ethyl	4%	9003-07-0



六氟磷酸锂 Lithium Hexafluorophosphate	5%	623-53-0
--------------------------------------	----	----------

Section 4 –急救措施 First-aid Measures

吸入: Inhalation	立即从暴露处移至空气清新处, 如果呼吸困难给予输氧, 立即就医。 Remove from exposure and move to fresh air immediately. Use oxygen if available.
皮肤接触Skin contact	万一接触, 用大量水冲洗至少 15 分钟, 同时除去污染的衣物和鞋子, 迅速就医。 Remove contaminated clothes and rinse skin with plenty of water or shower for 15 minutes. Get medical aid.
眼睛接触Eye contact	万一接触, 立即用大量的清水冲洗至少 15 分钟, 翻起上下眼睑, 直到化学的残留物消失为止, 迅速就医。 Flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical aid.
食入Ingestion	饮用两杯牛奶或水。如果当事人仍然清晰可以采取催吐的方法, 并且立即就医。 Give at least 2 glasses of milk or water. Induce vomiting unless patient is unconscious. Call a physician

Section 5 –消防措施 Fire-fighting Measures

燃点: Flash Point:	不适用 N/A
自燃温度: Auto-Ignition Temperature:	不适用 N/A.
灭火介质: Extinguishing Media:	大量水(降温), 二氧化碳 Water, CO2
特殊灭火程序: Special Fire-Fighting Procedures:	自给式呼吸器 Self-contained breathing apparatus.
异常火灾或爆炸: Unusual Fire and Explosion Hazards:	当电芯暴露于过热的环境中时, 安全阀可能会打开。 Cell may vent when subjected to excessive heat-exposing battery contents.
燃烧产生的危险物品: Hazardous Combustion Products:	一氧化碳, 二氧化碳, 锂氧化物烟气 Carbon monoxide, carbon dioxide, lithium oxide fumes.



Section 6 –泄露应急处理 Accidental Release Measures

为防止电池材料泄露或释放采取的措施 Steps to be Taken in case Material is Released or Spilled	如果电池内部材料泄露，试验人员应立即撤离试验区直到烟气消散。将通风设备打开吹散危险性气体。用抹布擦净试验区，清除溢出的液体，将泄露电池放进塑料袋中，然后放进钢制容器。避免皮肤和眼睛接触或吸入有害气体。 If the battery material is released, remove personnel from area until fumes dissipate. Provide maximum ventilation to clear out hazardous gases. Wipe it up with a cloth, and dispose of it in a plastic bag and put into a steel can. The preferred response is to leave the area and allow the battery to cool and vapors to dissipate. Provide maximum ventilation. Avoid skin and eye contact or inhalation of vapors. Remove spilled liquid with absorbent and incinerate.
废弃物处置方法 Waste Disposal Method	建议将电池完全放电，消耗电池内部的锂金属，并且深埋于土壤中。 It is recommended to discharge the battery to the end, to use up the metal lithium inside the battery, and to bury the discharged battery in soil.

Section 7 –处理和储存 Handling and Storage

处理： Handling:	禁止打开、毁坏或焚烧电池，因为电池有可能在这些处理过程中发生爆炸、破裂或泄露等事故。禁止将电池短路、过充、强制放电或扔入火中。禁止挤压刺穿电池或将电池浸入溶液中。 The battery should not be opened, destroyed or incinerate, since they may leak or rupture and release to the environment the ingredients that they contain in the hermetically sealed container. Do not short circuit terminals, or over charge the battery, forced over-discharge, throw to fire. Do not crush or puncture the battery, or immerse in liquids.
操作处置和储存中的防范措施： Precautions to be taken in handling and storing:	禁止物理或电滥用，禁止高温储存，最好将电池储存在阴凉、干燥、通风等温度变化较小的环境中。禁止将电池接触加热设备或将电池直接暴露与阳光中。 Avoid mechanical or electrical abuse. Storage preferably in cool, dry and ventilated area, which is subject to little temperature change. Storage at high temperatures should be avoided. Do not place the battery near heating equipment, nor expose to direct sunlight for long periods.



其他要注意的防范措施: Other Precautions:	拆解、挤压、直接放入火中或高温条件下, 电池可能发生爆炸和燃烧。禁止短接或将电池正负极 错误的安装在设备中。 The battery may explode or cause burns, if disassembled, crushed or exposed to fire or high temperatures. Do not short or install with incorrect polarity.
-----------------------------------	--

Section 8 –接触控制和个人防护 Exposure Controls and Personal Protection

呼吸防护: Respiratory Protection:	当电池排气阀打开时, 应尽量使通风设备开至最大, 避免将打开排气阀的电芯局限在某一狭窄空间内。正常操作条件下, 呼吸保护是不必要的。 In case of battery venting, provide as much ventilation as possible. Avoid confined areas with venting cell cores. Respiratory Protection is not necessary under conditions of normal use.
通风条件: Ventilation:	正常使用条件下不需要。 Not necessary under conditions of normal use.
防护手套: Protective Gloves:	正常使用条件下不需要。 Not necessary under conditions of normal use.
其他防护服装或设备: Other Protective Clothing or Equipment:	正常使用条件下不需要。 Not necessary under conditions of normal use.
电池开阀试验时应做好个人防护 呼吸防护, 防护手套, 防护服装和有护边的安全玻璃罩都是要准备的。 Personal Protection is recommended for venting battery Respiratory Protection, Protective Gloves, Protective Clothing and safety glass with side shields.	

Section 9 -物理和化学特性 Physical and Chemical Properties

外形: Appearance:	近长方形 Near rectangular shape
颜色: Color:	银色 Silver
气味: Odour:	泄漏时, 有醚的气味。 If leaking, smells of medical ether.
酸碱度: pH:	不适用 Not applicable as supplied.



燃点: Flash Point:	除单个电芯暴露试验外其他不适用。 Not applicable unless individual components exposed.
可燃性: Flammability:	除单个电芯暴露试验外其他不适用。 Not applicable unless individual components exposed.
相对密度: Relative density:	除单个电芯暴露试验外其他不适用。 Not applicable unless individual components exposed.
溶解性（水溶性）: Solubility (water):	除单个电芯暴露试验外其他不适用。 Not applicable unless individual components exposed.
溶解性（其他）: Solubility (other):	除单个电芯暴露试验外其他不适用。 Not applicable unless individual components exposed.

Section 10 -稳定性和反应活性 Stability and Reactivity

稳定性: Stability:	该产品在正常条件下稳定 The product is stable under normal conditions.
应避免的条件: Conditions to Avoid :	加热 70°C 以上或焚烧。变形。毁坏。粉碎。拆卸。过充电。短路。长时间暴露 在潮湿的条件下。 Heat above 70°C or incinerate. Deform. Mutilate. Crush. Disassemble. Overcharge. Short circuit. Expose over a long period to humid conditions.
应避免的材料: Materials to avoid:	氧化剂, 碱, 水。 Oxidising agents, alkalis, water.
危险分解物: Hazardous Decomposition Products :	有毒烟雾, 并可能形成过氧化物。 Toxic Fumes, and may form peroxides.
聚合危害: Hazardous Polymerization :	不适用 N/A.
如果发生泄露, 避免与强氧化剂, 无机酸, 强碱, 卤代烃接触。 If leaked, forbidden to contact with strong oxidizers, mineral acids, strong alkalies, halogenated hydrocarbons.	

Section 11 -毒理学资料 Toxicological Information

标志及症状: Signs & symptoms:	无, 除非电池破裂。 None, unless battery ruptures.
内部物质暴露的情况下, 蒸汽烟雾可能对眼睛和皮肤的刺激性。 In the event of exposure to internal contents, vapour fumes may be very irritating to the eyes and skin.	
吸入: Inhalation:	对肺有刺激性。 Lung irritant.



皮肤接触: Skin contact:	对皮肤刺激性。 Skin irritant.
眼睛接触: Eye contact:	对眼睛有刺激性。 Eye irritant
食入: Ingestion:	吞下中毒。 Poisoning if swallowed..
下列情况下健康状况会恶化: 万一发生与电池内部材料接触的事故, 轻微或严重的刺激, 都可能使皮肤出现干燥和灼烧的感觉, 并且损坏靶器官(肝脏, 肾脏)的神经。Medical conditions generally aggravated by exposure: In the event of exposure to internal contents, moderate to severe irritation, burning and dryness of the skin may occur, Target organs nerves, liver and kidneys.	

Section 12 -生态学资料 Ecological Information

对哺乳动物的影响: Mammalian effects:	目前未知。 None known at present.
生态毒性: Eco-toxicity:	目前未知。 None known at present.
生物体内积累: Bioaccumulation potential:	慢慢地生物降解。 Slowly Bio-degradable.
环境危害: Environmental fate:	目前没有已知的环境危害。 None known environmental hazards at present.

Section 13 –废弃处置 Disposal Considerations

不要焚烧, 或使电池温度超过 70°C, 这种滥用可导致泄漏和/或电池爆炸。按照相应的地方性法规处理。

Do not incinerate, or subject cells to temperature in excess of 70°C, Such abuse can result in loss of seal leakage, and/or cell explosion. Dispose of in accordance with appropriate local regulations.

Section 14 –运输信息 Transport Information

运输标签: 锂电池标签, 或锂电池第九类危险品标签, 或仅限货机标签

Label for conveyance: Lithium Battery Label, or Lithium Battery Class 9 Label, or Cargo Aircraft only

UN 编号: 3480 & 3481

UN Number: 3480 & 3481

包装级别: N/A

Packaging Group: N/A

EmS 编号: F-A ,S-I

EmS No: F-A ,S-I

海洋污染物: 无

Marine pollutant: No

正确的装运名称: 锂离子电池(包括锂聚合物电池), 或锂离子电池与设备包装在一起, 或锂离子电池安装在设备中



Proper Shipping name: Lithium Ion Battery (Including Lithium Polymer Battery), Lithium Ion Battery Packed With Equipment, Lithium Ion Battery Contained In Equipment

危害分类: 货物应遵守 IATA 第 66 版 DGR 手册包装说明 965第IB部分或包装说明966~967第II部分空运运输和包装符合 IMDG CODE (Amdt. 42-24) 版要求, 包括通过 UN38.3 测试手册要求。

Hazard Classification: The goods shall be shipped by air in according to Section IB of PACKING INSTRUCTION 965 or Section II of PACKING INSTRUCTION 966~967 of 66th DGR Manual of IATA. And Package complies with the IMDG CODE (Amdt. 42-24) Edition., including the passing of the UN38.3 test.

Section 15 -法规信息 Regulatory Information

法律信息

Law information

《危险物品规则》

《Dangerous Goods Regulations》

《对危险货物运输的有关规定的建议》

《Recommendations on the Transport of Dangerous Goods Model Regulations》

《国际海运危险货物规则》

《International Maritime Dangerous Goods》

《危险品安全运输技术指令》

《Technical Instructions for the Safe Transport of Dangerous Goods》

《危险货物分类和品名编号》

《Classification and code of dangerous goods》

《职业安全卫生法》

《Occupational Safety and Health Act》(OSHA)

《有毒物质控制法》

《Toxic Substance Control Act》(TSCA)

《消费产品安全法》

《Consumer Product Safety Act》(CPSA)

《联邦环境污染控制法》

《Federal Environmental Pollution Control Act》(FEPCA)

《石油污染法案》

《The Oil Pollution Act》(OPA)

《超级基金修正案和再授权法案III(302/311/312/313)》

《Superfund Amendments and Reauthorization Act TitleIII (302/311/312/313)》(SARA)

《资源保护及恢复法案》

《Resource Conservation and Recovery Act》(RCRA)

《安全饮用水法》

《Safety Drinking Water Act》(CWA)

《加州 65 提案》

《California Proposition 65》

《美国联邦法规》

《Code of Federal Regulations》(CFR)

根据所有联邦、州和地方法律。

In accordance with all Federal, State and local laws.



Section 16 -其他信息 Other Information

编制日期: 2025-06-24

Issue Time: 2025-06-24

本文件仅对由委托方平阳县浪辰电子商务有限公司提供的，并由平阳县浪辰电子商务有限公司生产的电池（PXM® 601520）有效。该电池的成分信息由委托方提供并承诺其完整性和准确性。用户应仔细阅读此文件，并按照正确的方法使用电池，如因电池使用不当造成的损害或损失，深圳德普华电子测试技术有限公司（STS）不承担任何责任。

This file is only effective to the batteries (PXM® 601520) provided by commissioner Pingyang County Lang Chen e-commerce Co., LTD, which manufactured by Pingyang County Lang Chen e-commerce Co., LTD The commissioner provides the composition information of batteries, and promises its integrity and accuracy. Users should read this file carefully, and use the batteries in correct method. Shenzhen STS Test Services Co., Ltd. (STS) doesn't assume responsibility for any damage or loss because of misuse of batteries.

※※※※※END OF THE REPORT※※※※※



立航检测
LH Testing



中国认可
国际互认
检测
TESTING
CNAS L15792

检 验 报 告

产品名称

逗猫球

委托单位

温州优洋电器有限公司

检验类型

委托试验

报告编号

LH-240902310267

深圳市立航检测技术有限公司

检测专用章

地址：广东省深圳市宝安区西乡街道盐田社区银田工业区 B15 栋 106、107

网址：www.lh-cert.com 邮编：518126 电话：0755-23217660

Add: 106 and 107, Building B15, Yantian Industrial Zone, Yantian, Xixiang street, Bao'an District, Shenzhen, Guangdong

Website: www.lh-cert.com Postcode: 518126 Telephone: 0755-23217660

样品信息：

检验类别	委托检验		
委托单位/委托人	温州优洋电器有限公司		
委托单位/委托人地址	浙江省温州市平阳县昆阳镇石塘社区西桥头村 34 号		
制造商	温州优洋电器有限公司		
制造商地址	浙江省温州市平阳县昆阳镇石塘社区西桥头村 34 号		
生产厂	温州优洋电器有限公司		
生产厂地址	浙江省温州市平阳县昆阳镇石塘社区西桥头村 34 号		
样品名称	逗猫球	样品数量	1 个
型号/款号	Y-805		
商标品牌	/		
样品来源	客户送样	样品状态	完好
样品送达日期	2024. 10. 08	检验日期	2024. 10. 08~2024. 10. 14
样品说明	本次申请产品为单一型号，有两种外观颜色，不影响产品的安全性。		

检验信息：

检验依据	GB 4706.1-2005 《家用和类似用途电器的安全 第1部分：通用要求》	
检验项目	依据客户要求，本次实验仅对送检产品进行第7章节的标志和说明测试，第8章节的对触及带电部件的防护测试，第13章节的电气强度测试，第20章节稳定性和机械危险测试，结果符合标准要求。	
检验环境	按标准要求	
检验结论	所检项目符合要求	
检验地址	广东省深圳市宝安区西乡街道盐田社区银田工业区 B15 栋 106、107	
注：报告中“判定”为“P”表示该项检验“合格”； “F”表示该项检验“不合格”； “N”表示该项检验“不适用”。		
主检	审核	批准
		
日期：2024 年 10 月 14 日	日期：2024 年 10 月 15 日	日期：2024 年 10 月 15 日

检 验 结 果

GB 4706.1-2005

条款	试验要求	试验结果	结论
----	------	------	----

7	标志和说明		
7.1	额定电压或额定电压范围(V).....:	5V	P
	电源性质.....:	===	P
	额定频率(Hz)		N
	额定输入功率(W)或额定电流(A)	1A	P
	制造厂名或责任承销商的名称、商标或识别标志.....:	温州优洋电器有限公司	P
	器具型号、规格	Y-805	P
	IEC 60417 中的符号 5172(仅对 II 类器具)		N
	防水等级的 IP 代码 (IPX0 不标出)		N
	适用时, 连接水源的外部软管组件中的电动水阀外壳应按 GB/T5465.2 标注符号		N
7.2	对于用多种电源的驻立式器具的警告语		N
	警告语应该位于接线端子罩盖的附近		N
7.3	正确地标示额定值范围		N
7.4	不同额定电压的设定应清晰可辨		N
7.5	标出每一额定电压所对应的额定输入功率或额定电流		N
	额定功率或额定电流的上、下限与额定电压的对应关系明确		N
7.6	正确使用符号		P
7.7	配备正确的接线图, 并固定在器具上		N
7.8	除 Z 型连接以外:		N
	——专门连接中线的接线端子用字母 N 标明		N
	—— 保护接地端子用符号  标明		N
	—— 标志不应设置在可拆卸的部件上		N
7.9	对于可能引起危险的开关, 其标志或位置应能清楚地表明其控制的部件		N
7.10	开关和控制器应用数字、字母或其它方式表示		P
	数字“0”只能表示“断开”档位, 除非不致引起与“断开”档位相混淆		N
7.11	控制器应标出调节方向		N
8	对触及带电部件的防护		
8.1	应有足够的防止意外触及带电部件的防护		P
8.1.1	所有状态, 包括取下可拆卸部件后的状态		P

检 验 结 果

GB 4706.1-2005

条款	试验要求	试验结果	结论
	装取灯泡期间, 应有对触及带电部件的防护		N
	用 IEC61032 中的探棒 B 进行检查, 不触及带电部件		N
8.1.2	用IEC61032 中的探棒 13 检查 0 类器具、II 类器具或 II 类结构上的孔隙, 不触及带电部件		N
	用探棒 13 检查有绝缘涂层的接地金属外壳上的孔隙, 不触及带电部件		N
8.1.4	若易触及部件为下述情况可认为不带电.....:		
	——由交流安全特低电压供电: 电压峰值 $\leq 42.4V$		N
	——由直流安全特低电压供电: 电压 $\leq 42.4V$		P
	——或通过保护阻抗与带电部件隔开, 直流电流 $\leq 2mA$		N
	—— 或通过保护阻抗与带电部件隔开, 交流峰值电流 $\leq 0.7mA$		N
	—— $42.4V < \text{峰值电压} \leq 450V$, 其电容量 $\leq 0.1\mu F$		N
	—— $450V < \text{峰值电压} \leq 15kV$, 其放电量 $\leq 45\mu C$		N
8.1.5	器具在就位或组装之前,带电部件至少应由基本绝缘保护:		
	——嵌装式器具		N
	——固定式器具		N
	——分离组件形式交付的器具		N
8.2	II 类器具和 II 类结构, 应对基本绝缘以及仅由基本绝缘与带电部件隔开的金属部件有足够的防止意外接触的保护		N
	只允许触及由双重绝缘或加强绝缘与带电部件隔开的部件		N
13	工作温度下的泄漏电流和电气强度		
13.3	绝缘的电气强度试验	见附表	P
	在试验期间不应出现击穿		P
20	稳定性和机械危险		
20.1	器具应有足够的稳定性		P
	倾斜试验, 倾斜角度 10° (器具放置的斜面与水平面间的夹角) 器具不应翻倒		P
20.2	活动部件应适当安置或封盖, 以提供防止人身伤害的保护		P
	保护性外壳、防护罩和类似部件应是不可拆卸的		P
	应具有足够的机械强度并牢固固定防护外壳		P
	自复位热断路器和过流保护装置在意外再次接通时不应引起危险		N

检 验 结 果

GB 4706.1-2005

条款	试验要求	试验结果	结论
----	------	------	----

	试验指不能触及运动部件		P
27	接地措施		
27.1	0I类和 I 类器具的易触及金属部件, 永久可靠地连接到一个接地端或输入插孔的接地触点上		N
	接地端不应与中性接线端子连接		N
	0 类、II 类和 III 类器具不应有接地措施		P
	安全特低电压电路不应接地, 除非是保护性特低电压电路		P
27.2	接地端子的夹紧装置应可靠牢固, 以防意外松动		N
	连接外部等电位导线的接线端子, 应允许连接标称截面为 2.5mm ² 至 6mm ² 的导线		N
	该端子不应用于为器具的不同部件提供接地连续性		N
	不借助工具不能松开导线		N
27.3	带接地连接的可拆卸部件插入到器具的另一部分中, 其接地连接应在载流连接之前完成; 在拔出部件时, 接地连接在载流连接断开之后断开		N
	对带有电源线的器具, 如果软线从固定装置中滑出, 载流导线应比接地导线先绷紧		N
27.4	接地端子的金属与其它金属间的接触不应引起腐蚀危险		N
	除金属框架或外壳外, 用于提供接地连续性的部件都应充分防腐蚀		N
	提供接地连续性的钢制件, 其基本表面应有厚度至少为 5μm 的电镀层		N
	仅用于提供和传递接触压力的带涂层或不带涂层的钢制件应充分防锈		N
	应采取预防措施避免铝合金引起的腐蚀危险		N
27.5	接地端子或触点与接地金属部件之间的连接应是低电阻的		N
	如果对于保护性特低电压电路, 基本绝缘的电气间隙取决于器具的额定电压, 则本要求不适用		N
	在规定的低电阻试验中, 电阻值应不超过 0.1Ω		N
27.6	印刷电路板上的印刷导体在手持式器具中不能用于提供接地连续性		N
	该导体可用在其它器具中, 如果		
	—— 至少有两条电路使用彼此独立的焊点, 且对于每一电		N

检 验 结 果

GB 4706.1-2005

条款	试验要求	试验结果	结论
	路，器具都符合 27.5 的规定		
	——印刷电路板材料符合 IEC 60249-2-4 或IEC 60249-2-5		N

检 验 结 果

GB 4706.1-2005

条款	试验要求	试验结果	结论
13.3	表格：工作温度下的电气强度测试		P
试验电压施加部位		试验电压(V)	是否击穿
输入对塑料外壳（覆盖金属箔）		500	否

样品照片



图一 外观




图二 外观

样品照片




图三 外观（红框处为铭牌粘贴位置）

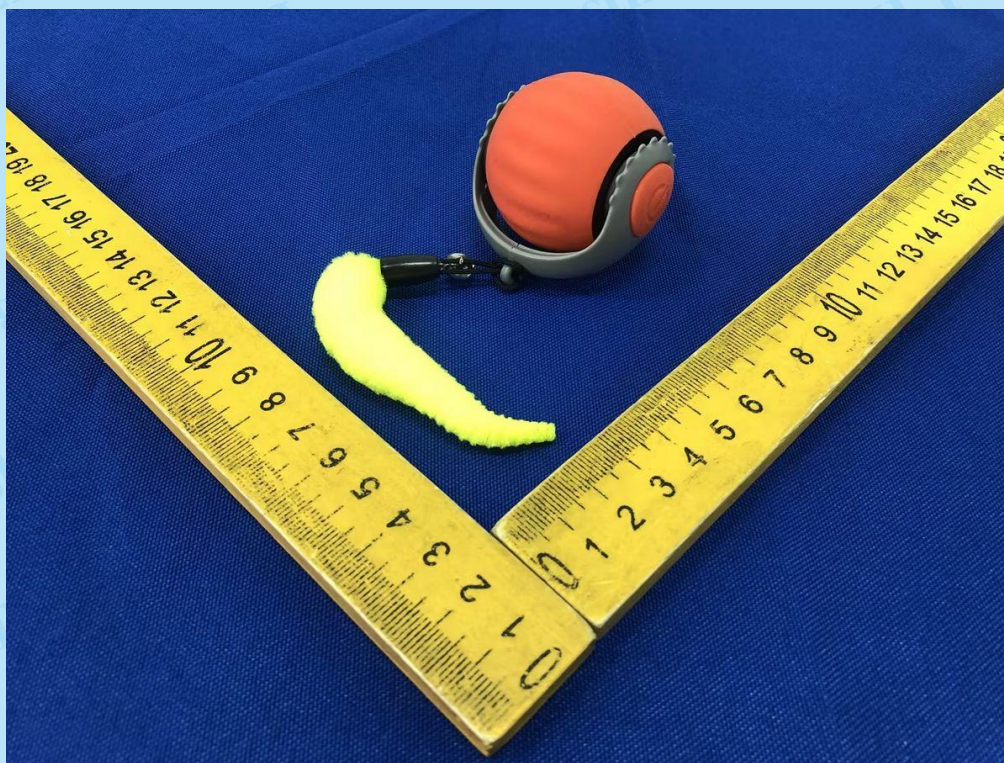

图四 外观

样品照片

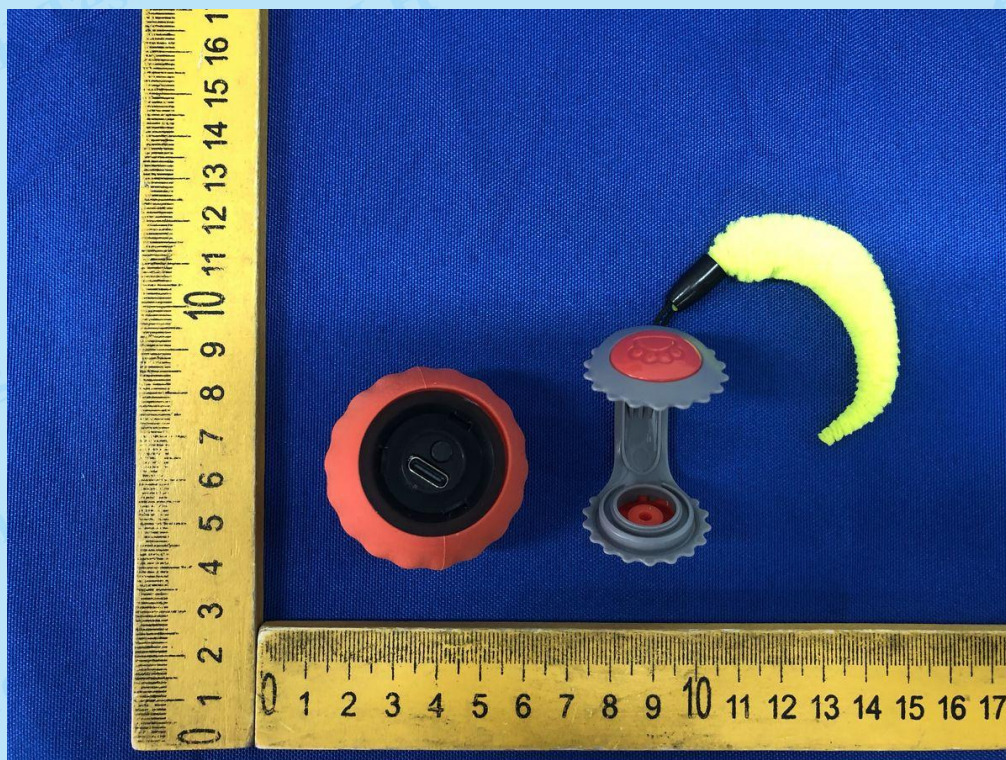


图五 外观




图六 内部结构

样品照片

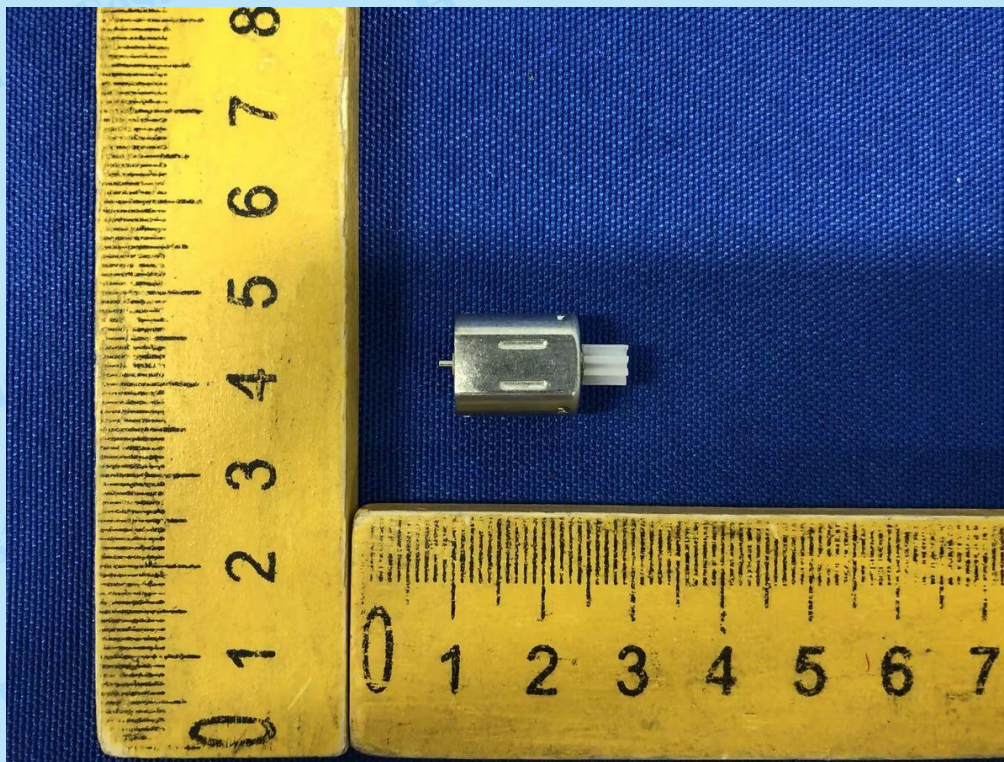


图七 电机

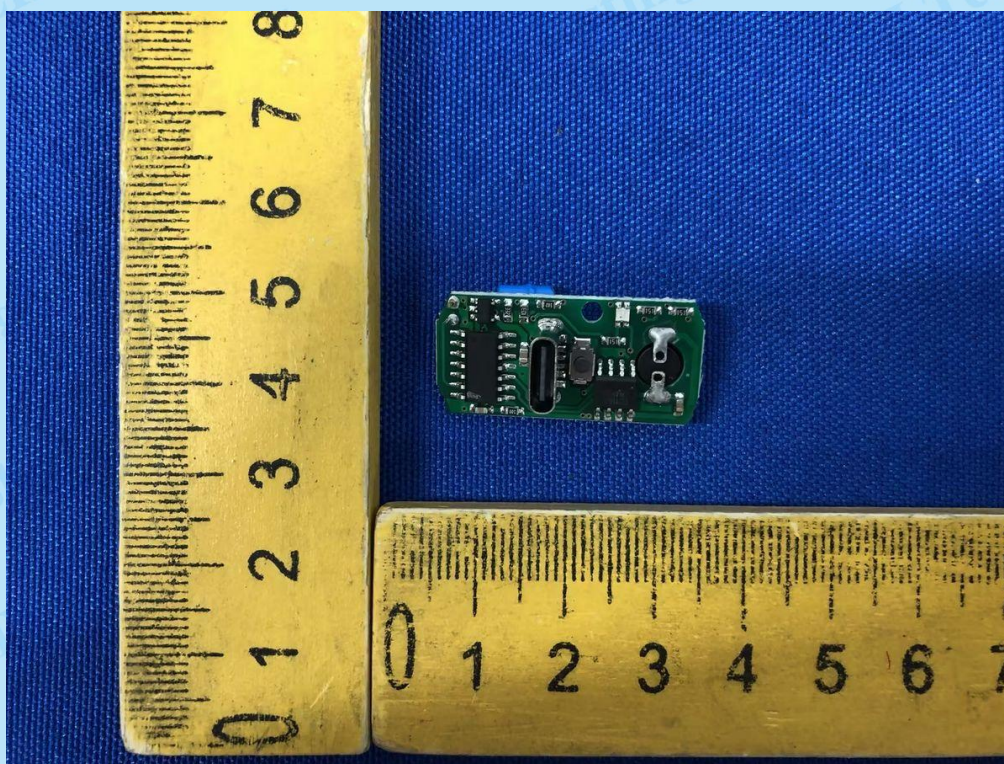


图八 电路板正面

样品照片

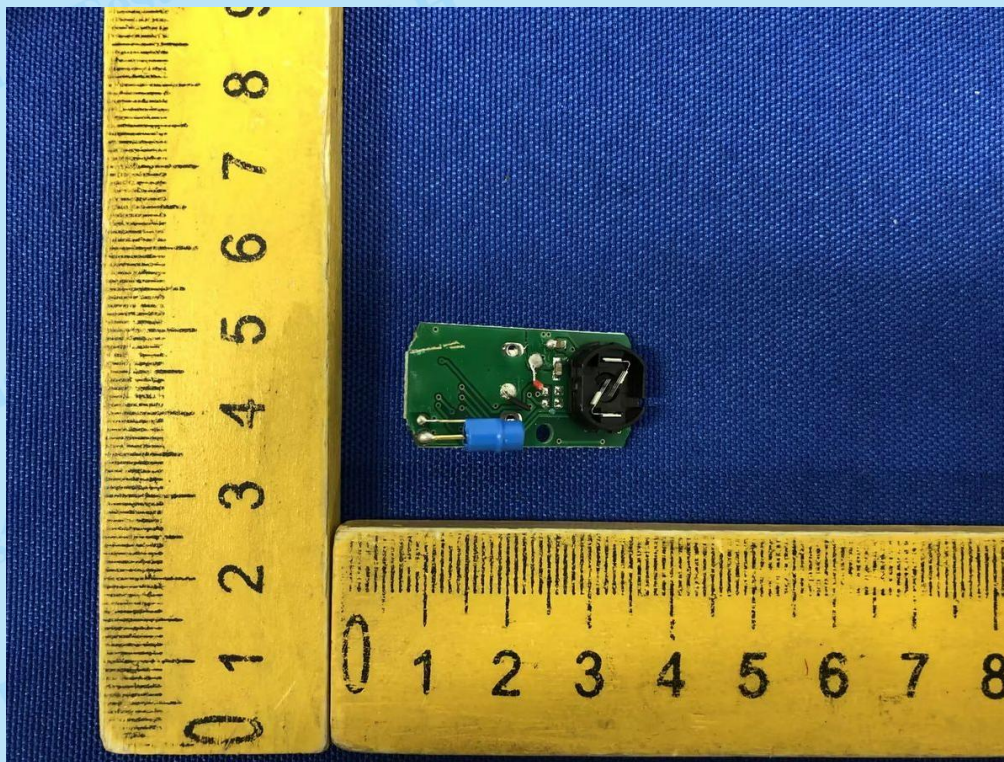

图九 电路板反面

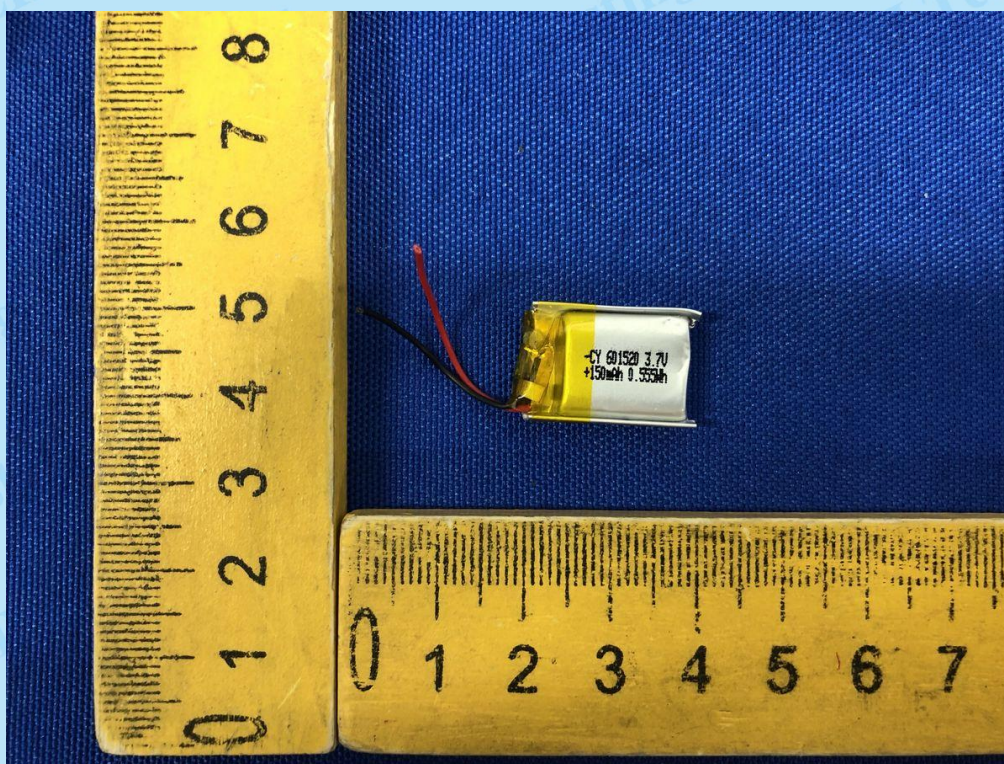

图十 电池

样 品 照 片

逗猫球

型号: Y-805

输入: 5V $\overline{\text{---}}$ 1A

温州优洋电器有限公司

中国制造

图十一 铭牌

主要仪器设备清单

序号	仪器设备名称	型号	编号	校准有效期至	本次使用 (√)
1	秒表	PC396	LH-S027	2025. 09. 08	√
2	直流电源	PS-305DF	LH-S036	2025. 09. 03	√
3	数字万用表	15B+	LH-S021	2025. 09. 03	√
4	温湿度大气压力表	Testo622	LH-S071	2025. 09. 12	√
5	耐电压测试仪	CC2672D-A	LH-S005	2025. 09. 03	√

注：以上使用设备在计量校准周期内均正常工作。

——结束——

声 明

1. 报告无“检测专用章”无效。
2. 复制报告未重新加盖“检测专用章”无效。
3. 报告无检验、审核、批准人签章无效。
4. 报告涂改无效。
5. 对本报告若有异议，应于收到报告之日起十五日内向检验单位提出，逾期不予受理。
6. 本报告试验结果仅对受试样品所检项目有效。
7. 未经许可本报告不得部分复制。
8. 伪造、篡改本检验报告，我单位有权追究法律责任。
9. “*”号项目未通过 CNAS 认可和 CMA 认定。

检测机构： 深圳市立航检测技术有限公司

地 址： 广东省深圳市宝安区西乡街道盐田社区银田工业区
B15 栋 106、107

邮政编码： 518126

电 话： 0755-23217660

传 真： +86-0755-23217660

E-MAIL: lihangcert@163.com