


GNIAZDO STAŁE NA NISKIE NAPIĘCIE / WALL SOCKET LOW VOLTAGE

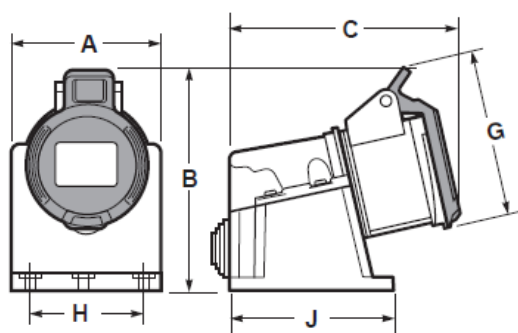

	16A			32A		
Poles	3	4	5	3	4	5
A	75	75	79	79	79	79
B	112	117	120	128	128	131
C	110	110	117	127	127	130
G	85	94	102	102	102	110
H	58	58	62	62	62	62
J	80	80	85	85	85	85
Connection type	Conexión por tornillo / Screw terminals					
Wire flexible (mm²)	1 - 2,5			2,5 - 6		
Weight (g)	220	228	250	271	290	314

ZASTOSOWANE DYREKTYWY /
DIRECTIVE APLIED

Low Voltage Directive 2014/35/UE

STOPIEŃ OCHRONY /
DEGREE OF PROTECTION

IP54

ODPORNOŚĆ NA UDARY /
IMPACT RESISTANCE

IK08

TEST ROZŻARZONEGO DRUTU
GLOW WIRE

Części czynne / Actice parts: 850 °C
Inne części / Other parts: 650 °C

STABILNOŚĆ WYMIARÓW /
DIMENSIONAL STABILITY

- 25 °C + 85 ° C

CHARAKTERYSTYKA ELEKTRYCZNA /
ELECTRICAL CHARACTERISTICS

Bieguny / Poles: 3P+N+T(E)
Prąd / Current: 16 A
Napięcie / Voltage: 380 ÷ 415 V
Godzina / Time: 6 H
Częstotliwość / Frequency: 50 / 60 Hz

NORMA ZHARMONIZOWANA /
HARMONIZED STANDARD APPLIED

EN 60309-1; EN 60309-2