

Model:PE3010-M

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Pirmary voltage:
110V/220V/230V,or producing as customerized.



Technical Index:


Technical Index: PCB
Flame resistance : UL94-V0
Insulation class: B
Operation temperature: -30℃~+70℃
Work frequency: 50Hz~60Hz
Dielectric strength: 3.5KV 50Hz 1min

Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤30	%
Power	1	VA
Temperature rising	≤15	℃
No load loss	≤0.4	W
weight	66	g

Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8V	8.5V×2	166mA	83mA×2
7.5V	7.5V×2	11V	11V×2	133mA	66mA×2
9V	9V×2	13V	13V×2	111mA	55mA×2
12V	12V×2	17V	16.5V×2	83mA	41mA×2
15V	15V×2	20.5V	22.2V×2	66mA	33mA×2
18V	18V×2	24V	24V×2	55mA	27mA×2
24V	24V×2	35.5V	38V×2	41mA	21mA×2


Schematic Diagram:

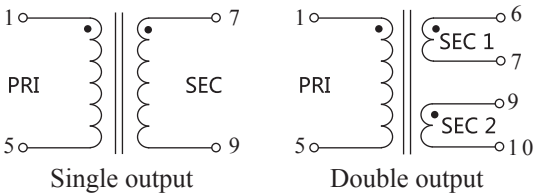

Dimension（in mm）：

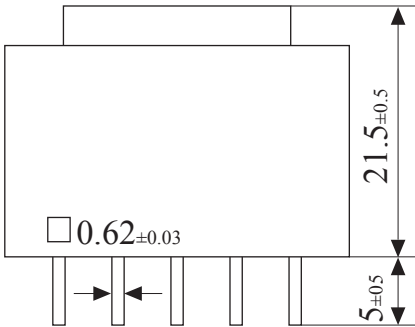

Front View

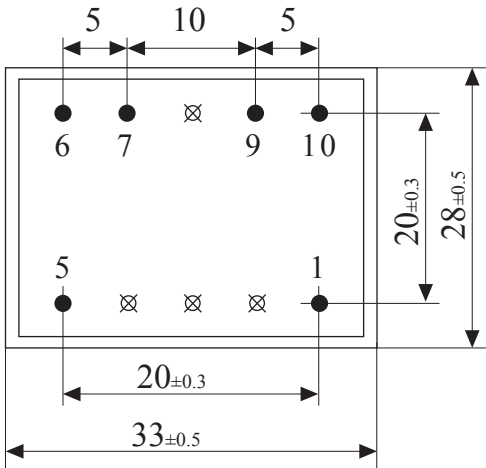

Bottom View