

Model:PE2409-I

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,open loop circuit
can be allowed in the secondary,Pirmary voltage:110V/
220V/230V,or producing as customerized.


Technical Index:

Technical Index: PCB
Flame resistance : UL94-V0
Insulation class: B
Operation temperature: -30℃~+70℃
Work frequency: 50Hz~60Hz
Dielectric strength: 3.5KV 50Hz 1min


Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤44	%
Power	0.5	VA
Temperature rising	≤15	℃
No load loss	≤0.15	W
weight	42	g

Dimension（in mm）：

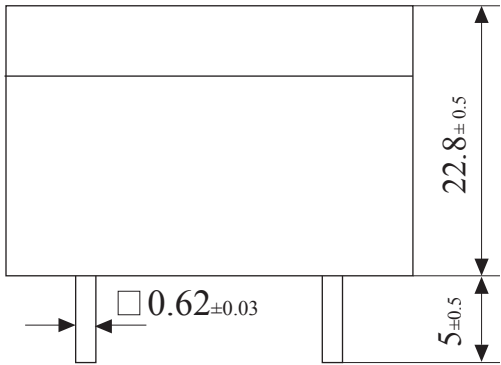

Front View

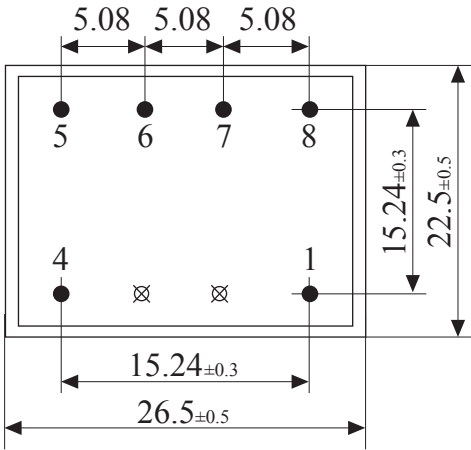

Bottom View



Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	10.5V	10.5V×2	83mA	41.5mA×2
7.5V	7.5V×2	13V	13V×2	66mA	33mA×2
9V	9V×2	15V	15V×2	55mA	27.5mA×2
12V	12V×2	21.6V	21.6V×2	41.6mA	20.8mA×2
15V	15V×2	27V	27V×2	33mA	16.5mA×2
18V	18V×2	32.4V	33V×2	27.7mA	14mA×2
24V	24V×2	43.2V	44V×2	20.8mA	11mA×2

Schematic Diagram:

