

Model:3TA8350BL-400

Characteristics:

full sealed,epoxy encapsulated,high dielectric strength,
three phase current combination detection,adopting
nanocrystalline core.

Technical index:

Mounting type: Plate

Material of the core: Nanocrystalline

Flame resistance: UL94-V0

Execution standard: GB1208-2006

Operating temperature: -35℃~+85℃

Storage temperature: -45℃~+95℃

Frequency range: 20Hz-20KHz


Dielectric strength: 3.5KV 50Hz 1min




Electrical parameters:

Rated input	0-100	A
Max.input		A
Rated output	0-25	mA
Turns ratio	1: 4000	
Accuracy	±1	%
Linearity	≤0.2	%
Phase difference		
Max.sampling resistance	500	Ω
Weight	248	g


Schematic diagram:

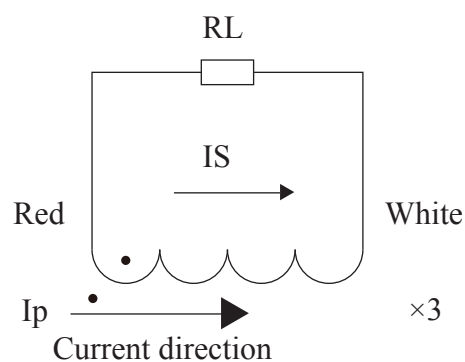

Dimensions (in mm) :

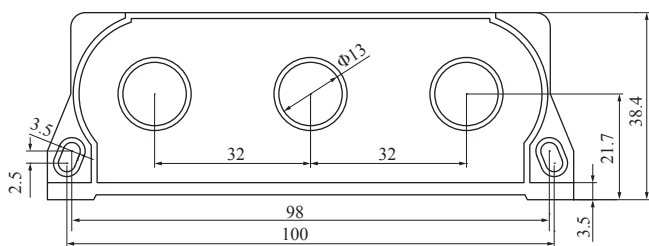

Front view

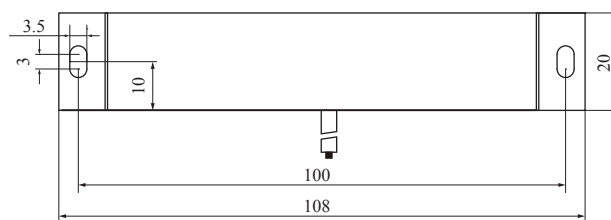

Bottom view