


# LED FILAMENT BULB

Product&amp;Family Code:



001 015 0006

**FILAMENT GLOBE-6**


Technical Drawing

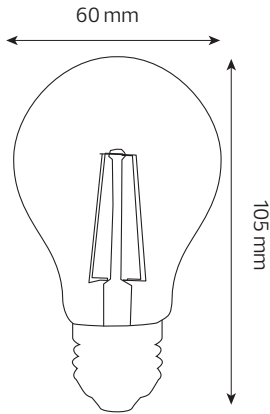

Photometric Diagram

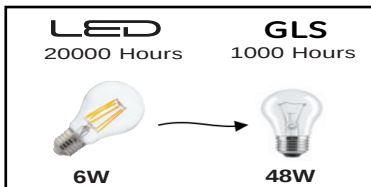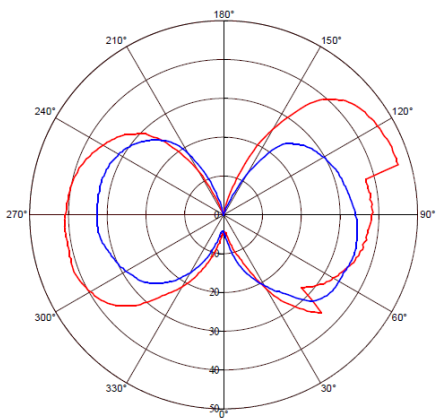

## Technical Data

|                                                 |                    |
|-------------------------------------------------|--------------------|
| Voltage (V)                                     | 220-240V           |
| Product Wattage (W)                             | 6                  |
| Equivalence with incandescent lamp (W)          | 48                 |
| Colour Render Index (Ra)                        | >Ra80              |
| Colour Temperature (K)                          | 2700K-4200K        |
| Materials                                       | Glass              |
| Protection Class                                | -                  |
| Dimmable                                        | No                 |
| EEI                                             | A+ E               |
| Warm-up time up to 60 %of the full light output | Instant Full Light |
| Luminous Flux (lm)                              | 700                |
| Luminous Efficacy (lm/W)                        | 116                |
| Rated Life (hrs) ⌚                              | 20,000             |
| IP Rating                                       | -                  |
| Power Factor                                    | >0.5               |
| Beam Angle ☆                                    | 320 °              |
| Starting Time                                   | <0.1s              |
| Number of ON-OFF cycling                        | x10,000            |

## Applications

- Home, Shop, Indoor etc.



## Features

- Very low energy consumption
- High Lumen and CRI, good quality
- High heat dissipation, low carbon and environmental protection

