


LED BULB


Product&Family Code: 001 064 0010

CONVEX-10



Technical Drawing

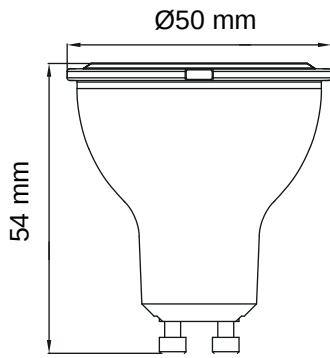

Photometric Diagram

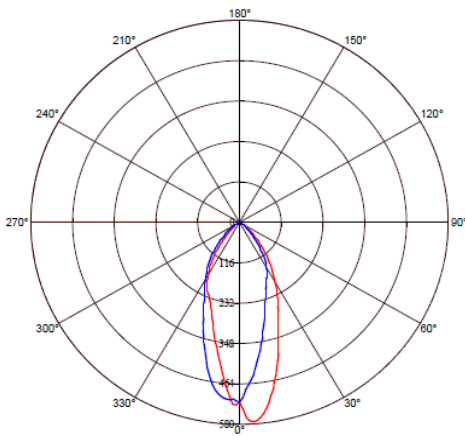

C0 Plane beam angle(50%): 38.3(DEG) C90 Plane beam angle(50%): 37.4(DEG)

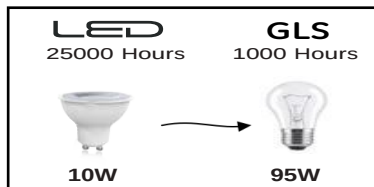

Technical Data

Voltage (V)	175-250V
Product Wattage (W)	10
Equivalence with incandescent lamp	95
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	3000K-4200K-6400K
Materials	Aluminium + PC
Protection Class	-
Dimmable	No
EEL	AG F
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	800
Luminous Efficacy (lm/W)	80
Rated Life (hrs) ⌚	25,000
IP Rating	-
Power Factor	>0.7
Beam Angle ☆	38 °
Starting Time	<0.5s
Number of ON-OFF cycling	>15,000

Applications

- The luminaire is an excellent solutions for market, museum, restaurant, show room, and other spot lighting needed.



Features

- Low power consumption
- Efficient replacement for incandescent lamps
- Mercury free, no UV and IR radiation
- Instant on, 100% light output

