



LED-HALO-TRPS Series

Full spectrum coverage, covering all stages of plant growth.
Uniform and dense PAR map means deeper light penetration
for healthier plants , for max efficiency

**All in one
Design**


**Built-in
Driver**

**Installation
Easy**

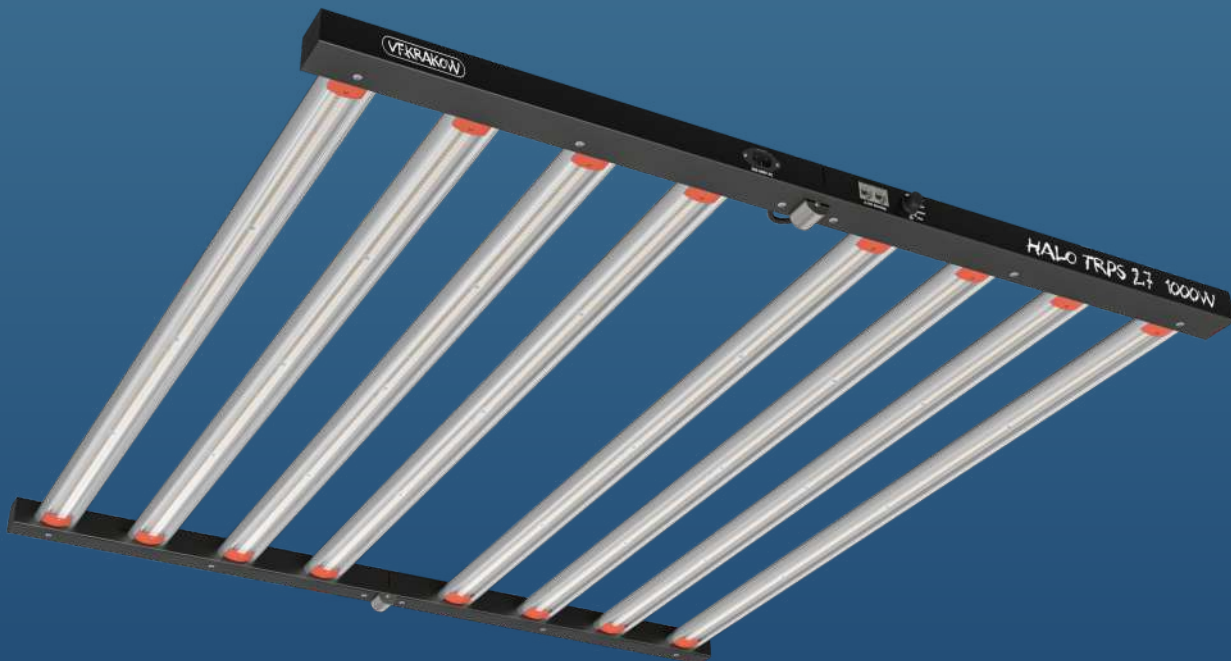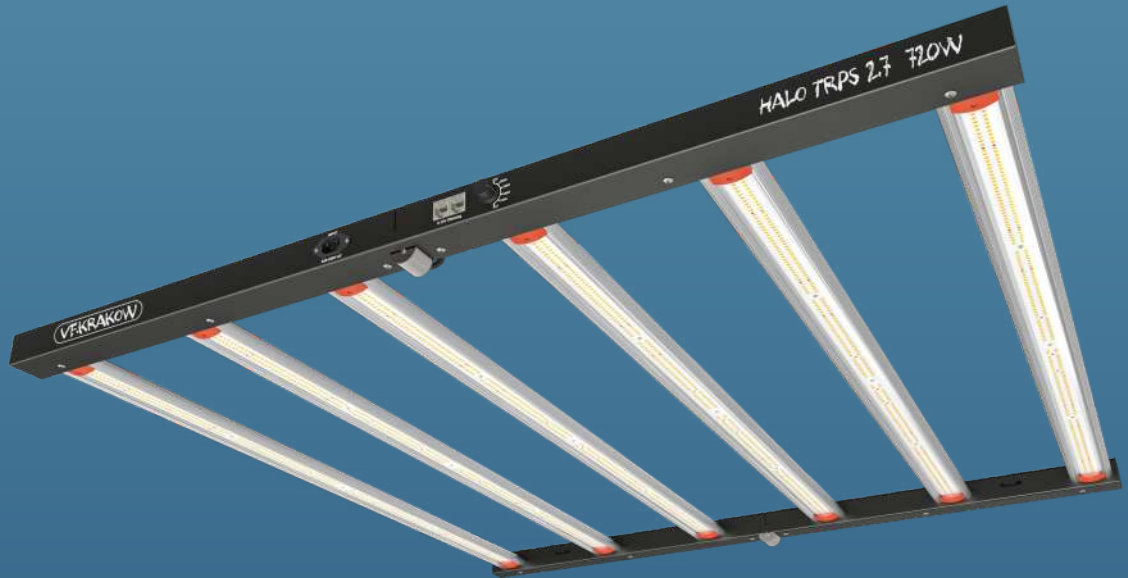




LED-HALO-TRPS-1000W

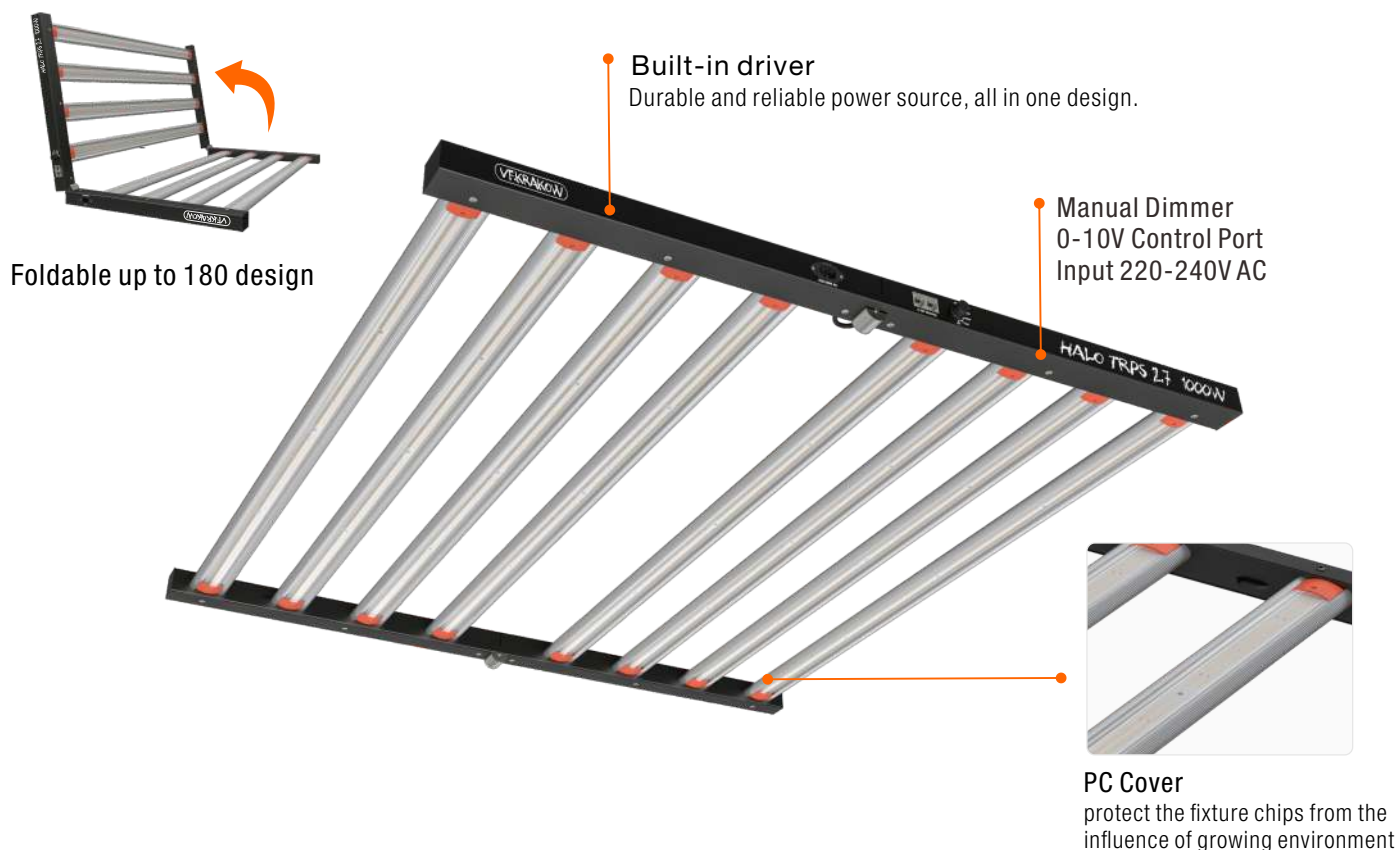

Specifications

Input Power	1000W
Light Bar Qty	8 Bar
Efficacy	2.7umol/J
PPF	2700 umol/s
Input Voltage	220-240V AC
Chip	Branded LEDs
Mounting Height	≥12" (30cm) Above Canopy
Thermal Management	Passive
Lifetime	50,000hrs
Power Factor	>90%
Colour Rendering Index	90ra
Ambient Temperture	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA

Spectrum

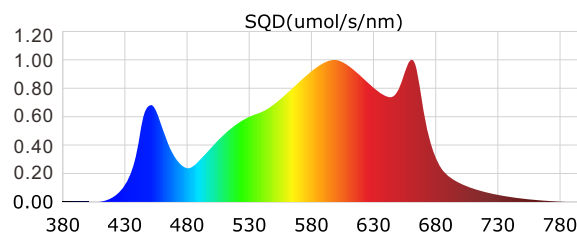

Max amperage by voltage service


Voltage	220V	240V
Amperage	4.55A	4.17A

Dimensions

Part	Length	Width	Height
LED Fixture	1110mm (43.5")	1065mm (41.9")	70mm (2.8")
Package Size	1150mm (45.3")	105mm (4.1")	560mm (22")




LED-HALO-TRPS-720W

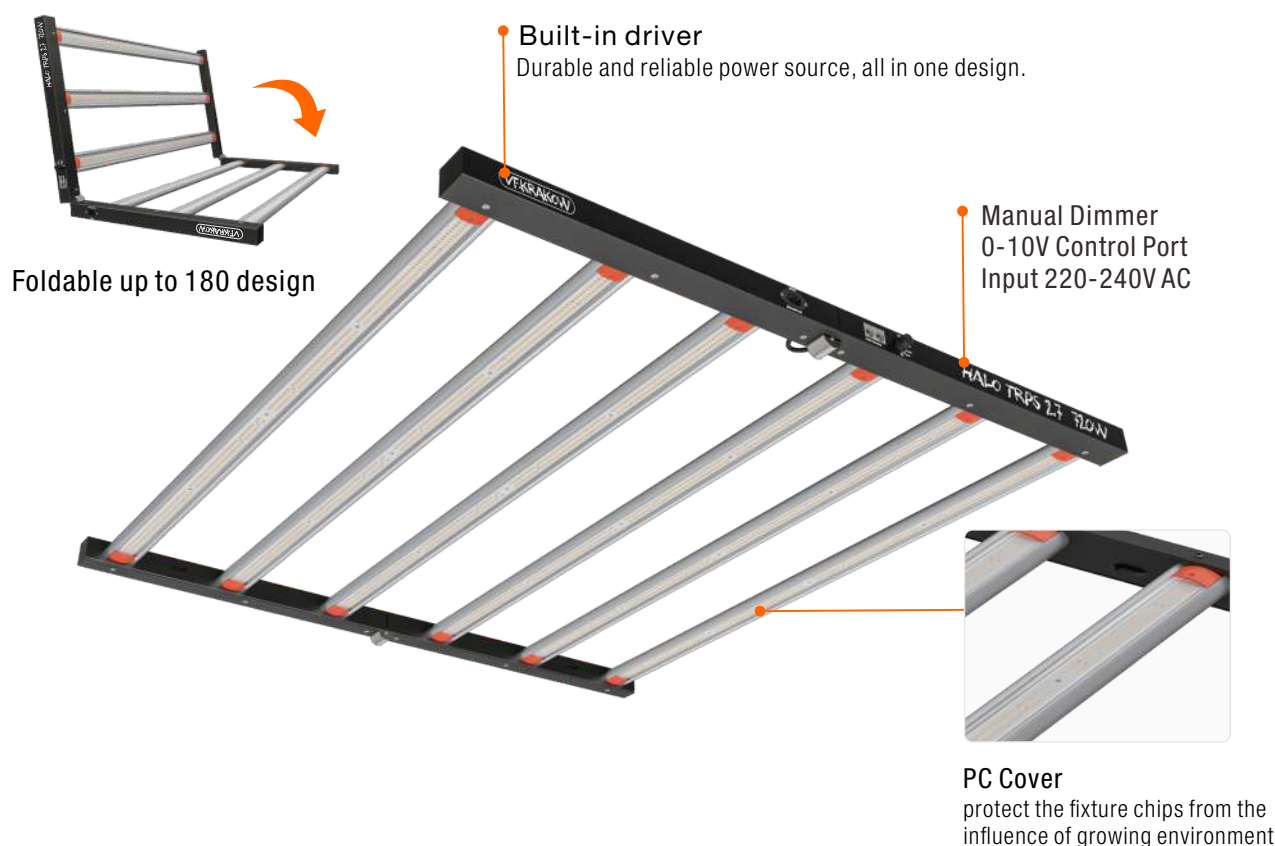

Specifications

Input Power	720W
Light Bar Qty	6 Bar
Efficacy	2.7umol/J
PPF	1944 umol/s
Input Voltage	220-240V AC
Chip	Branded LEDs
Mounting Height	≥12" (30cm) Above Canopy
Thermal Management	Passive
Lifetime	50,000hrs
Power Factor	>90%
Colour Rendering Index	90ra
Ambient Temperture	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA

Spectrum

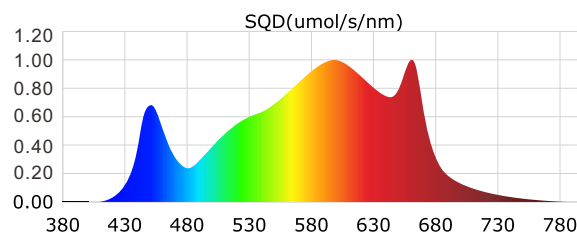

Max amperage by voltage service

Voltage	220V	240V
Amperage	3.27A	3.00A

Dimensions

Part	Length	Width	Height
LED Fixture	1110mm (43.5")	1065mm (41.9")	70mm (2.8")
Package Size	1150mm (45.3")	105mm (4.1")	635mm (25")



LED-HALO-TRPS-360W

Manual Dimmer
0-10V Control Port
Input 220-240V AC

2M EU Power Cord


Built-in driver
Durable and reliable power source,
all in one design.

PC Cover
protect the fixture chips from the
influence of growing environment

Specifications

Input Power	360W
Light Bar Qty	6 Bar
Efficacy	2.7umol/J
PPF	972 umol/s
Input Voltage	220-240V AC
Chip	Branded LEDs
Mounting Height	≥12" (30cm) Above Canopy
Thermal Management	Passive
Lifetime	50,000hrs
Power Factor	>90%
Colour Rendering Index	90ra
Ambient Temperature	-25~40°C
Control	0-10V Control
Certifications	ETL , CE , UKCA

Spectrum

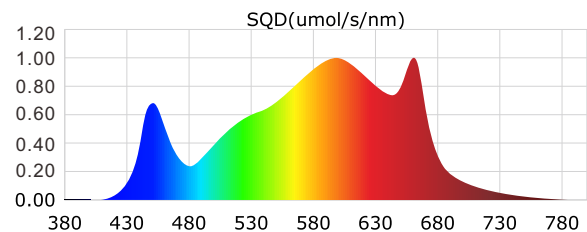

Max amperage by voltage service

Voltage	220V	240V
Amperage	1.64A	1.50A

Dimensions

Part	Length	Width	Height
LED Fixture	580mm (22.8")	580mm (22.8")	38mm (1.5")
Package Size	630mm (24.8")	80mm (3.2")	645mm (25.4")