
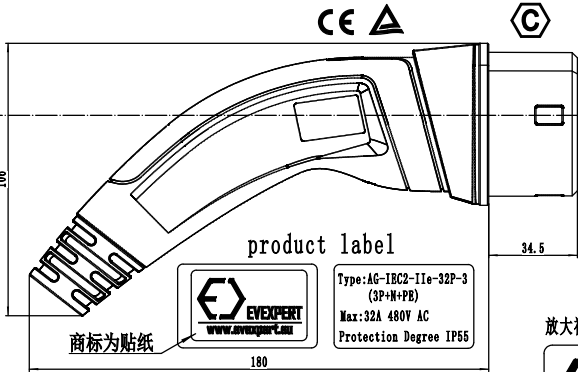


Customer name: 诚欧国际贸易（常州）有限公司 (EVexpert)

Type2-Type2 32A/480V AC 5m弹簧

Ver	ECN	MARK	DESCRIPTION	DATE	APP	CHK
B			插头增加C标	22.03.18		

Type II
2-IIe





Technical parameters
Current and Voltage : 32A 480V AC
Signal current : 2A 30V
Protection Degree : IP55

Cable specification



Function	32A 480V AC	Function
L1 (1)	6 mm ² Brown	L1 (1)
L2 (2)	6 mm ² Black	L2 (2)
L3 (3)	6 mm ² Grey	L3 (3)
N (4)	6 mm ² Blue	N (4)
PE (5)	6 mm ² Yellow-green	PE (5)
CP (6)	0.5 mm ² White	CP (6)
PP (7)		PP (7)

棕
黑
灰
蓝
黄
绿
白


Type II
2-IIb

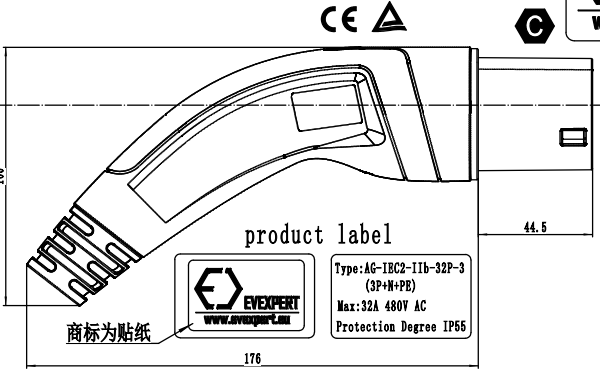


32A 3P+N+PE+PP+CP
Type II , was designed according to the standard of
IEC 62196-2 sheet 2-IIb/2-IIe
The static resistance is 220 ohm
Charging cable 5000mm 5*6mm²+2*0.5mm² Black TUV overall cable

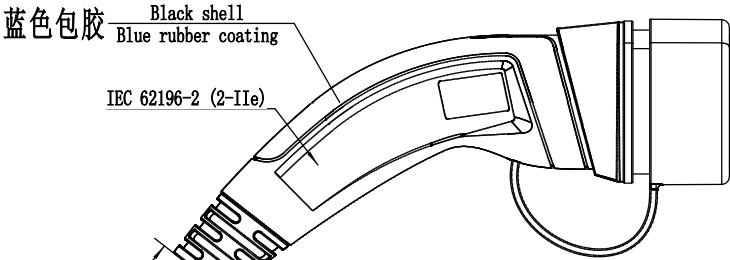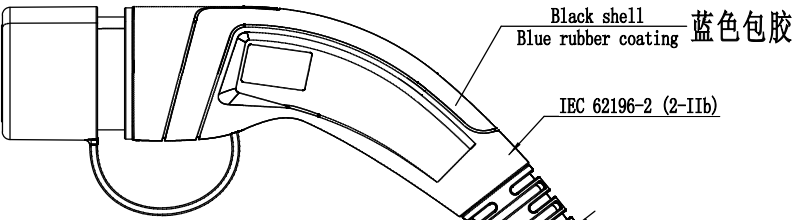

mode of connection

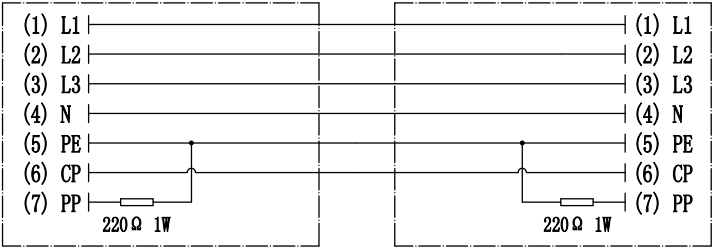

黑色TUV弹簧线
H07BZ5-F 5*6mm²+2*0.5mm²
Black TUV overall cable

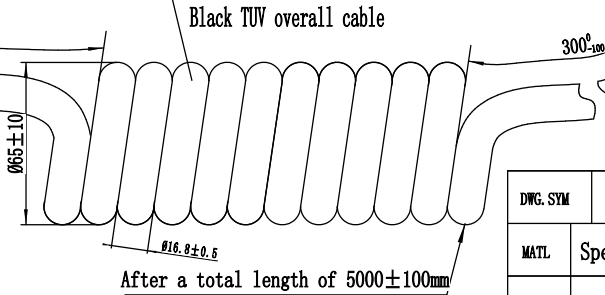

DWG. SYM	S	A	B	PROJ. SYM	AG ELECTRICAL TECHNOLOGY CO., LTD
MATL	Specifications			WEIGHT	NAME Charging connectors
DESIGNED	CHECK	STD/CHECKED	DRAW NO	AG-IBC2-IIb/e-32P-3	
CHECKED	PROCESS	APPROVED	PART NO	SHEET X OF X	