

3TA8350BL



Characteristic: full sealed, Epoxy encapsulated,
High dielectric strength, Three-phase current combination
detection Adopting nanocrystalline core.

Technical Index:


- Mounting type: Suspend
- Core material: Nanocrystalline
- Fair resistance: with UL94-V0
- Complaint with: GB1208-2006
- Operating temperature: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Storage temperature: $-45^{\circ}\text{C} \sim +95^{\circ}\text{C}$
- Frequency range: 20Hz-20KHz
- Dielectric strength: 3.5KV 50Hz 1min



Technical Parameters table:

Model	3TA8350BL-100	3TA8350BL-200	3TA8350BL-300	3TA8350BL-400
Rated Input	25A	50A	75A	100A
Rated output	25mA	25mA	25mA	25mA
Change ratio	1:1000	1:2000	1:3000	1:4000
Max. sampling resistance	100 Ω	150 Ω	200 Ω	500 Ω
Linearity	$\leq 0.2\%$			
weight	248g			

Schematic Diagram:

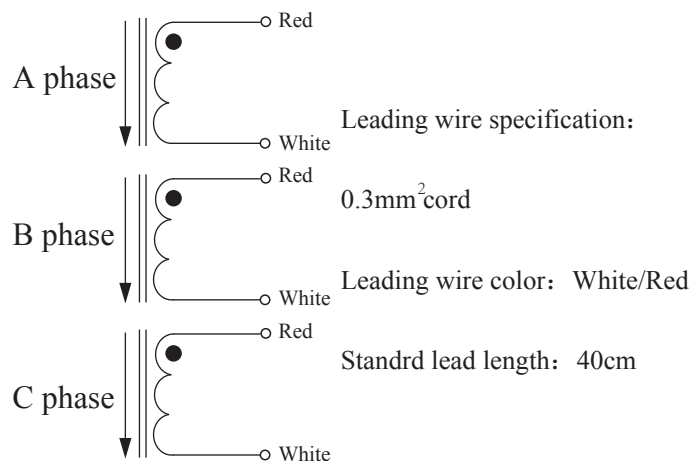

Dimensions(in mm ± 0.5) :

