


R4 SERIES ROCKER SWITCH



1. RATING : 2 = 250 V AC , 10 A & 125 V AC , 15 A ;
5 = 250 V AC , 15 A & 125 V AC , 20 A .
2. CONTACT RESISTANCE : 20 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 1000 MΩ MIN .
4. OPERATING TEMPERATURE : -20°C ~ 70°C .
5. OPERATING LIFE : 10,000 CYCLES .

CODE	OPERATING	RATING:	
		10A	15A
1	ON OFF	2	5
2	ON ON	2	5
3	ON OFF ON	2	5
4	ON (ON)	2	5
5	OFF (ON)	2	5
6	(ON)OFF(ON)	2	5
7	ON (OFF)	2	5
8	ON OFF (ON)	2	5
9	ON OFF ILLUMINATED	2	5

	COLOR	COLOR OF HOUSING	COLOR OF ROCKER
K	BLACK	✓ ★	✓ ★
W	WHITE	✓	✓
G	GRAY	✓	✓
O	ORANGE		✓
B	BLUE		✓
R	NON ILLUMINATED RED		✓
Y	ILLUMINATED YELLOW		✓
M	ILLUMINATED GREEN		✓
D	ILLUMINATED RED		✓





MARKING :

("★" Standard)



TERMINAL TYPE:

T TYPE

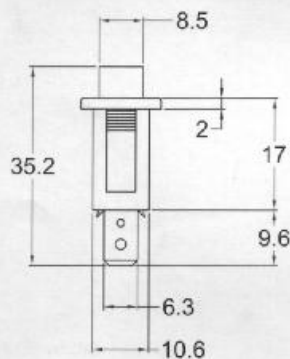

LAMP VOLTAGE :

- 0 = NO LAMP ; 1 = 125 V AC
2 = 250 V AC ; 3 = 12 V DC
4 = 24 V DC

HOW TO ORDER

SERIES	OPERATION	RATING	COLOR HOUSING	COLOR ROCKER	MARKING	LAMP VOLTAGE