


Dystanse metalowe gwintowane M3 i M4


Dystanse metal wewnętrzno/wewnętrzne

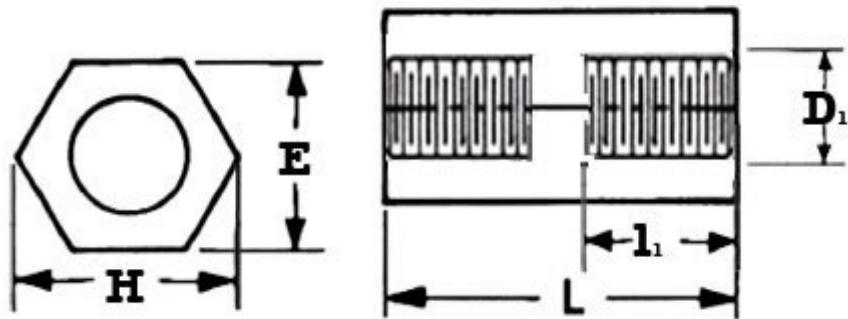

Typ	D1	E	H	L1	L
M3 w/w	M3	5,0	5,5 – 0,2	7,0	5; 8; 10; 12; 15; 18; 20; 25; 30; 35; 40; 45; 50
M4 w/w	M4	6,0	7,0 – 0,2	7,0	5; 8; 10; 12; 15; 18; 20; 25

Wymiary podano w [mm]

Dystanse metal zewnętrzno/wewnętrzne

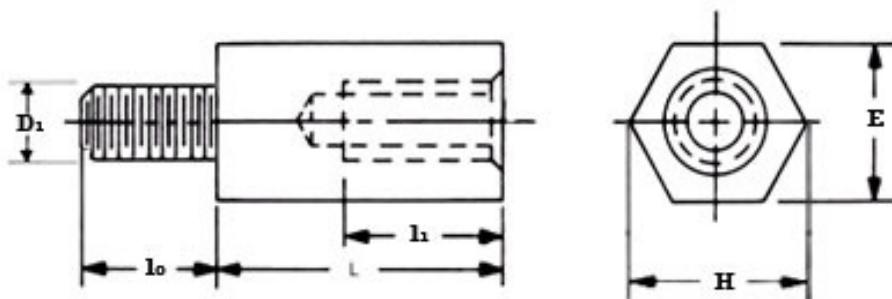

Typ	D1	E	H	L0	L1	L
M3 z/w	M3	5,0	5,5 – 0,2	6,0	7,0	5; 8; 10; 12; 15; 18; 20; 25; 30; 35; 40; 45; 50
M4 z/w	M4	6,0	7,0 – 0,2	6,0	7,0	5; 8; 10; 12; 15; 18; 20; 25

Wymiary podano w [mm]