# Lighting

**PHILIPS** 



# Corepro Glass High Lumen bulbs

# CorePro LEDBulbND 150W E27 A67 840 FR G

Featuring a classic heritage design, these filament CorePro LED bulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. A very easy choice for people who are looking for a retrofit LED replacement, these high lumen LED bulbs provide 90% energy savings compared with conventional light bulbs. CorePro LED High Lumen bulbs provide excellent quality of light. Energy-saving LED lighting that offers a lifetime of 15,000 hours to reduce maintenance costs.

### **Product data**

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	2,452 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	140.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	17.5 W
Lamp Current (Nom)	150 mA
Wattage Equivalent	150 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.51
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	No


A ↑ G

## **Corepro Glass High Lumen bulbs**

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A67
Net Weight (Piece)	0.040 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	18 kWh
EPREL Registration Number	374906
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Application Conditions	
can it be used in closed luminaires	No

Product Data	
Order product name	CorePro LEDBulbND 150W E27 A67
	840 FR G
Full product name	CorePro LEDBulbND 150W E27 A67
	840 FR G
Full product code	871951434663500
Order code	929002372702
Material Nr. (12NC)	929002372702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514346635
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514346642

### Dimensional drawing



CorePro LEDBulbND 150W E27 A67 840 FR G	70 mm	121 mm

D

с

### Photometric data

		1 x 9290823727 4800K 17.5W
		1x1411 in.
Frielmanity degram	Quantice nativation diagram	USI depart
XX	All Annual Contractor	
		i Antonio Antonio
Kest.		
XX		
	Unitation former minis	Laminance Table
Elevent II	Money N. Config of Advance (Accillation	
Sheek Fathers		
And part of		
		EEEEEE

-100-120° 120° 50-₩ 90<sup>°</sup> 90° -50-60° 60° 100γ 🗡

180°

-150-

150

0°

150°

(cd/1000lm)


150°

Product

Light Distribution Diagram - CorePro LEDBulbND 150W E27 A67 840 FR G


# Corepro Glass High Lumen bulbs

Photometric data

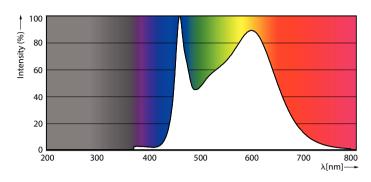

Spectral Power Distribution Colour - CorePro LEDBulbND 150W E27 A67 840 FR G

#### Lifetime

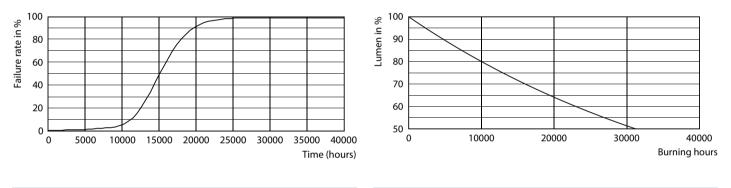

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDBulbND 150W E27 A67 840 FR G



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.