





## Product Specification (1/2)

2019.April

## RESU7H type-C

Electrical Characteristics				
Total Energy Capacity 1)		7.0 kWh @25°C (77°F), Beginning of Life		
Usable Energy Capacity 1)		6.6 kWh @25°C (77°F)		
Battery Capacity		63 Ah		
Voltage Range	Charge	468 to 550 V $_{DC}$		
	Discharge	430 to 507 V $_{DC}$		
Absolute Max. Voltage		570 V <sub>DC</sub>		
Max. Charge/Discharge Current		7.5A@467V / 8.1A@427V		
Max. Charge/Discharge Power <sup>2)</sup>		3.5kW		
Peak Power (only discharging) 3)		5kW for 10 sec.		
Peak Current (only discharging)		11.6A@430V for 10 sec.		
Communication Interface		CAN		
DC Disconnect		Circuit Breaker, 25A, 600V rating		
Connection Method		Spring Type Connector		
User interface		LEDs for Normal and Fault operation		

### **Operating Conditions**

Installation Location	Indoor / Outdoor (Wall-Mounted)
Operating Temperature	14 to 113°F (-10 to 45°C)
Operating Temperature (Recommended)	59 to 86°F (15 to 30°C)
Storage Temperature	-22 to 131°F (-30 to 55°C)
Humidity	5% to 95%
Altitude	Max. 6,562ft (2,000m)
Cooling Strategy	Natural Convection
Noise Emission	< 40 dBA

### Certification

Safety	Cell	UL1642
	Battery Pack	CE / RCM / TUV (IEC 62619)
Emissions		FCC
Hazardous Materials Classification		Class 9
Transportation		UN38.3 (UNDOT)
Ingress Rating		IP55

- \* Test Conditions Temperature 25°C, at the beginning of life
- Total Energy is measured under specific condition from LGC(0.3CCCV/0.3CC)
- 1) Value for Battery Cell Only (Depth of Discharge 95%). Actual usable energy at the AC output may vary by condition, such as the battery converter, inverter efficiency and temperature.
- 2) LG Chem recommends 2.1kW for maximum battery lifetime
- 3) Peak Current excludes repeated short duration (less than 5 sec. of current pattern).




# Product Specification (2/2)


2019.April

## RESU7H type-C

### **Features**

- ☐ Emergency Power Back-up
- ☐ Compact size and space saving
- ☐ Matched with SMA Sunny Boy Storage models
- ☐ Wall mounting installation
- ☐ Proven Safety and 10 year warranty

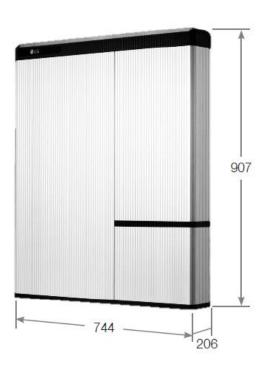

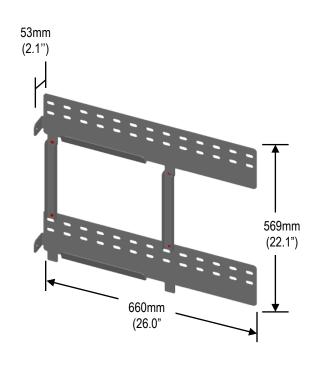

### **Mechanical Characteristics**

	Width	744mm (29.3")
Dimensions	Height	907mm (35.7")
	Depth	206mm ( 8.1")
Weight		97kg (191.8lbs)



