

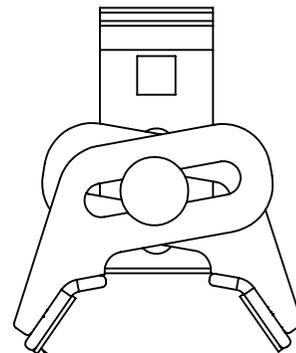
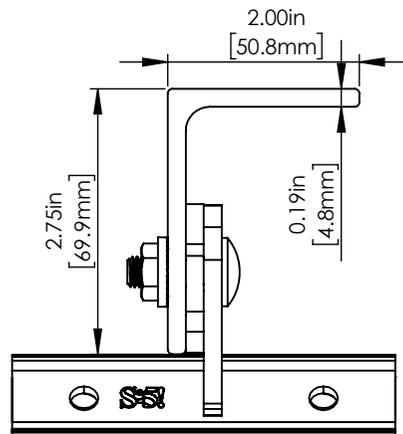
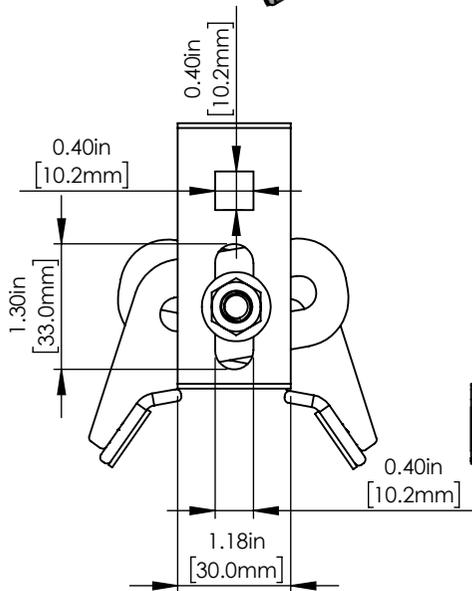
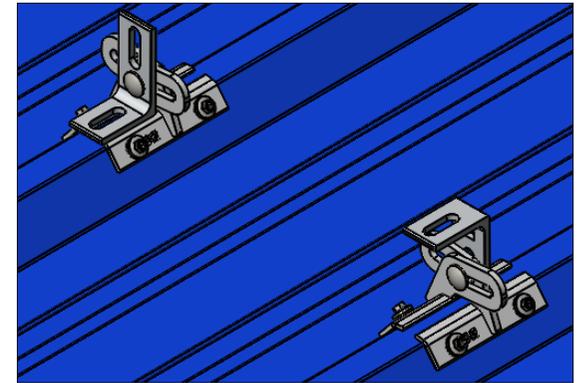
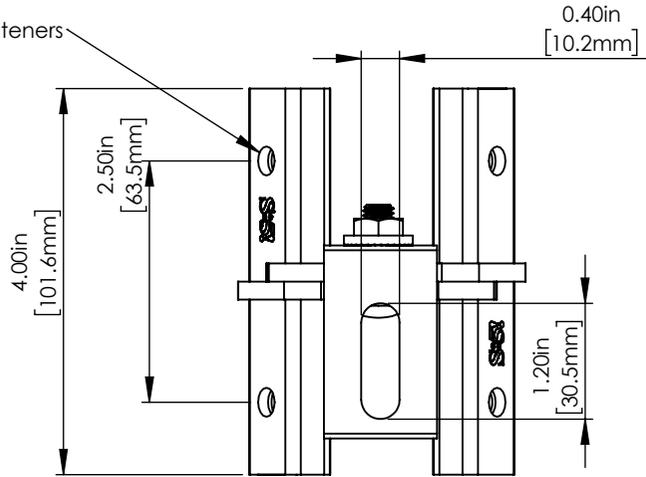


(4x) Through hole for fasteners




(2x) Factory applied EPDM with sticky adhesive

MIN and MAX Range

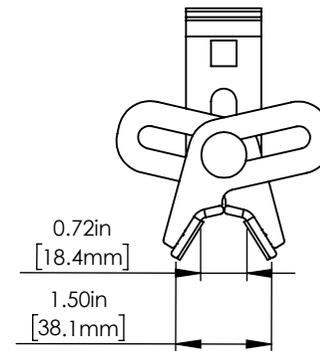

General Notes:

1. ProteaBracket
2. 1" Self Tapping Screw
3. Example Rib Roof

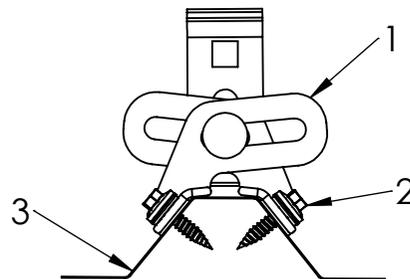

FOR STANDING SEAM SPECIFIC MECHANICAL LOAD TEST INFORMATION AND CLAMP INSTALLATION INFORMATION PLEASE VISIT: WWW.S-5.COM

MATERIAL: 6061 T6 AL				METAL ROOF INNOVATIONS, LTD. 8750 WALKER RD COLORADO SPRINGS, CO 80908 719-495-0518 719-495-0045(FAX)		
EST ASSEMBLY WEIGHT: 179.2 g						
SUPPLIED HARDWARE: (4x) 1" Self Tapping Screw	TITLE ProteaBracket [CCD]					
SCALE: 1:2	DRAWING NO. PB6-A-0-A_BLF10-A-0-A	DRAWN BY JW	DATE 5/20/2019			
WEIGHTS:	S-5® PRODUCTS ARE PROTECTED BY MULTIPLE U.S. PATENTS INCLUDING 5,228,248, 5,983,588 AND 6,164,033 (OTHERS ISSUED AND PENDING). EUROPEAN PATENTS ARE ALSO APPLIED FOR AND PENDING UNDER THE PATENT COOPERATION TREATY WITH DIVISIONAL FILING RIGHTS RETAINED. METAL ROOF INNOVATIONS, LTD. (LICENSOR OF S-5!® TECHNOLOGY) AGGRESSIVELY PROSECUTES PATENT INFRINGEMENT.					