

# MG0098

## Audio/Visual Remote Alarm

### Submittal Data Sheet

Project Information

Project Number \_\_\_\_\_ Approval \_\_\_\_\_

### FEATURES

- > Five year parts and one year labor limited warranty\*
- > High intensity LED Lights
- > Loud audible alarm buzzer rated at 85 DBA @ 10cm = 4"
- > Panel is back mounted
- > Durable metal case
- > Solid state components
- > Plugs into most electrical outlets


### SPECIFICATIONS

Remote Audio/Visual Alarm is specially designed to provide warning of cylinder depletion for a one gas manifold system.

The visual portion of the alarm will change from a "green" indicator for system normal operation to a "red" indicator for system abnormal.

Once the system is re-pressurized, the indicator lights will return to the normal "green" position. When the cylinders are depleted, the alarm buzzer will automatically sound. A reset button conveniently located on the front of the unit will deactivate the alarm buzzer.

The MG0098 alarm may be used in conjunction with a pressure switch or with a set of dry contact alarm signal points. The alarm is supplied with a transformer (100-240 VAC x 5 VDC) that plugs into an electrical outlet and a 4 1/2 foot cord that goes from the transformer to the alarm. Ideal for industrial, medical and specialty gas use.

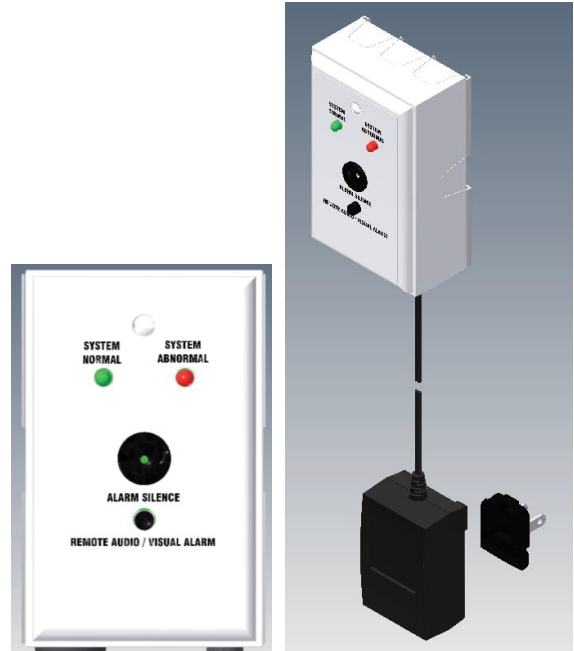

Model MG0098 - Shown above  
(With interchangeable plug)

### Ordering Information

Part Number	Description	Dimensions
MG0098	Single gas Remote Audio/Visual Alarm	4 5/8" H x 3" W x 1 7/8" D

Six different interchangeable plug configurations are provided to adapt the transformer to a variety of International plug patterns.