

Avante Veterinary Scales


1995-2022-06-15



Avante 400
Veterinary Scale



Avante 700
Veterinary Scale

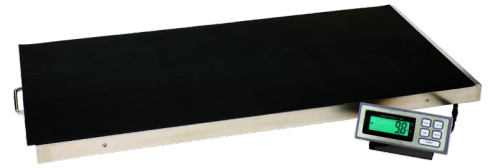

Avante 700XL
Veterinary Scale

SPECIFICATIONS

- › Casing: Plastic
- › Capacity: 400 lbs
- › 2nd Capacity: No
- › Resolution: 0.1lb
- › No. of Display Divisions: 4000
- › No. of Internal Resolutions: 2m
- › Accuracy: +/-3d
- › Platter Size: 37.4 x 19.7 in
- › Draft Shield: No
- › Scale Dimensions: 37.4 x 19.7 x 3 in
- › LCD Height: 1 in
- › Beeper: Yes
- › Auto Backlight: Yes, Selectable
- › Auto Shut Off: Yes, Selectable
- › Auto Hold: No
- › Unit Switching: kg, lb
- › AD Processor: 21 bit A/D
- › AD Update Speed: 10 Hz
- › Settling Time: <2s
- › Calibration Software: AnyCAL
- › No of Keys: 5
- › Memory: Zero
- › Counting Function: No
- › RS232C: Yes
- › USB: No
- › Battery: 6 x AA-size battery
- › AC Adapter: Yes, 9VDC
- › Shipping Weight: 31 lbs

- › Casing: Steel
- › Capacity: 700 lbs
- › 2nd Capacity: No
- › Resolution: 0.2lb
- › No. of Display Divisions: 3500
- › No. of Internal Resolutions: 2m
- › Accuracy: +/-3d
- › Platter Size: 37.4 x 19.7 in
- › Draft Shield: No
- › Scale Dimensions: 37.4 x 19.7 x 3 in
- › LCD Height: 1 in
- › Beeper: Yes
- › Auto Backlight: Yes, Selectable
- › Auto Shut Off: Yes, Selectable
- › Auto Hold: No
- › Unit Switching: kg,lb
- › AD Processor: 21 bit A/D
- › AD Update Speed: 10 Hz
- › Settling Time: <2s
- › Calibration Software: AnyCAL
- › No of Keys: 5
- › Memory: Zero
- › Counting Function: No
- › RS232C: Yes
- › USB: No
- › Battery: 6 x AA-size battery
- › AC Adapter: Yes, 9VDC
- › Shipping Weight: 47 lbs

- › Casing: Steel
- › Capacity: 700 lbs
- › 2nd Capacity: No
- › Resolution: 0.2 lb
- › No. of Display Divisions: 3500
- › No. of Internal Resolutions: 2 m
- › Accuracy: +/- 3d
- › Platform size: 44 x 22 x 3 in
- › Draft Shield: No
- › LCD Height: 1 in
- › Beeper: Yes
- › Auto Backlight: Yes, Selectable
- › Auto Shut Off: Yes, Selectable
- › Auto Hold: No
- › Unit Switching: kg, lb
- › AD Processor: 21 bit A/D
- › AD Update Speed: 10 Hz
- › Settling Time: <2s
- › Calibration Software: AnyCAL
- › Number of Keys: 5
- › Memory: Zero
- › RS232C: Yes
- › USB: No
- › Battery: 6 x AA-size battery
- › AC Adapter: Yes, 9 VDC
- › Shipping Weight: 58 lb