

Manual Simplex

Manifold Series

Submittal Data Sheet

Project Information

Project Number _____ Approval _____


FEATURES

- Five year parts and one year labor limited warranty*
- Adjustable line regulator 0 – 125 PSIG or 0 – 200 PSIG (Nitrogen)
- Flexible stainless braided pigtails CGA gas specific pigtail connections are provided standard for all gas services, Copper pigtails are available as an option
- Complete system cleaned for use with Oxygen
- Cylinder contents gauge and delivery pressure gauge included
- Outlet union provided – 1/2 Male NPT
- Wall mounting bracket included
- Maximum inlet pressure 3,000 PSIG
- Available with pressure switch port 1/2 female NPT

Optional pressure switch set to 150 PSI


Optional remote audio visual alarm preprogrammed to "OXYGEN LOW SWITCH MANIFOLD" signal

*See Terms and Conditions, Document No. 99-

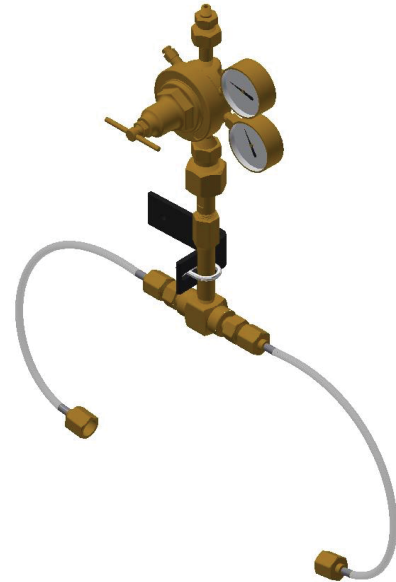

Model MG0188 with flexible pigtails shown above


Ideal for veterinary applications where manual switching of cylinders and a possible interruption of gas service are allowable. Systems are available for **Nitrous Oxide, Carbon Dioxide, Nitrogen, Medical Air and Oxygen**

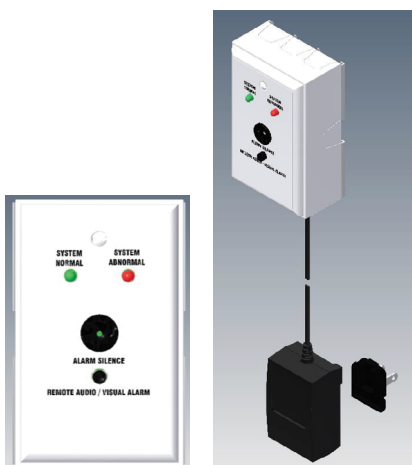

*Model MG0098 Shown above
Optional remote audio visual point alarm must be used with optional pressure switch*



Model MG0188 with PS-100-1000 pressure switch shown above



*Dimensional information
Allow 20" of wall space for two gas cylinders.*