## SUBIAO

**eGRAVEL** 

## NEW LIMITS... OR NO LIMITS.



## **FULLY INTEGRATED CABLES FOR CLASSIC GRAVEL BIKE LOOKS**





CABLE INTEGRATED HEADSET





12.5<sub>kg</sub> FULL BIKE

SAFER, WIDER FIT

WINDOW



UP TO 45 C TIRE CLEARANCE 650B X 45C (MAX WIDTH 47mm) 700C X 40C (MAX WIDTH 42mm)



EXCEPTIONAL COMPLIANCE AND PEDALING EFFICIENCY



360B - Everlasting Green, Gloss

Photos are for illustrative purposes only. Product not necessarily sold as shown.



FENDER & RACK
COMPATIBLE




ENDURANCE GEOMETRY: STABILITY & COMFORT

For those who live to go out of bounds, get ready to set new limits with the Subito eGravel. Get that first kick through the washboard up a climb, or extra jump through muddy ruts. Built on the Ebikemotion platform, the Subito eGravel promises a little something extra when that kick is needed. Stable ride quality from a longer wheelbase, dropped chainstays and clearance for 650x45c (47mm) tires offer the confidence to take the road less travelled. Just like our All-road models, the handling components have been tuned to offer a precise and predictable riding experience, so that you can get up to a little trouble without losing your grip.



AS A GRAVEL RIDER, YOU'RE **ALREADY LOOKING FOR** THE NEXT GREAT ESCAPE, **AND SEARCHING OUT NEW ROADS AT EVERY TURN.** LIGHTWEIGHT, RUGGED, AND READY TO ROLL, THE **SUBITO EGRAVEL LETS YOU** AMP UP YOUR ADVENTURE.

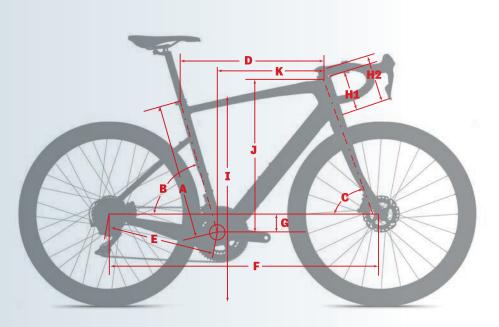

GE	OMETRY		XXS	XS	S	М	L	XL
Size	Classic		44-46	47-50	51-53	54-56	57-59	60-62
A	SEAT TUBE HEIGHT	cm	42.0	45.0	48.5	52.0	55.5	59.0
В	SEAT TUBE ANGLE	deg	75.5	74.9	74.3	73.7	73.1	72.5
С	HEAD TUBE ANGLE	deg	69.3	70.8	71.3	72.0	72.0	72.3
D	TOP TUBE LENGTH*	cm	49.0	51.0	52.7	55.0	57.3	59.8
E	CHAINSTAY LENGTH	cm	42.2	42.2	42.2	42.2	42.2	42.2
F	WHEELBASE	cm	99.4	99.7	101.0	101.4	103.2	104.8
G	BB DROP	cm	7.5	7.5	7.5	7.5	7.5	7.5
H1	HEADTUBE LENGTH	cm	10.6	12.1	14.2	16.1	18.6	21.2
H2	(+25mm SRS)	cm	13.1	14.6	16.7	18.6	21.1	23.7
ī	STANDOVER HEIGHT	cm	68.3	71.0	74.2	77.3	80.4	83.5

FIT (STACK AND REACH)		XXS	XS	S	М	L	XL	
Siz	e Classic		44-46	47-50	51-53	54-56	57-59	60-62
J	STACK	cm	51.9	53.9	56.1	58.4	60.8	63.4
K	REACH	cm	35.2	36.2	37.2	38.2	39.2	40.2
J	STACK (25mm SRS)	cm	54.2	56.2	58.4	60.7	63.1	65.7
K	REACH (25mm SRS)	cm	34.3	35.4	36.4	37.5	38.5	39.5
SAE	DDLE HEIGHT MIN. †	cm	52.0	55.0	58.5	62.0	65.5	69.0
SAE	DLE HEIGHT MAX.	cm	74.0	77.0	80.5	84.0	87.5	91.0

<sup>†</sup> Measured From Middle of BB to Top of Saddle Along Seat tube

## **BUILD OPTIONS SPECS**

SRAM Apex AXS XPLR GLOBAL			
FRONT DERAILLEUR	N/A		
REAR DERAILLEUR	SRAM Apex AXS XPLR		
SHIFTERS	SRAM Apex AXS		
BRAKE CALIPERS	SRAM Apex AXS		
ROTORS	SRAM G2CS Rotors / F:160mm R:140mm		

CRANKSET	SRAM Apex 1 Wide DUB 42T
ВВ	SRAM DUB PF 86.5 Road Wide
CHAIN	SRAM Apex 12S
CASSETTE	SRAM APEX XPLR PG-1231 11-44
HEADSET	FSA No.69 SRS + 3D+
STEM	FSA OS-167 Omega Pro
HANDLEBAR	FSA NS Adventure Compact HR-RD-310S

BAR TAPE	Ciclovation Leather Touch Tornado Reflective
SADDLE	Prologo Proxim W350
SEATPOST	Argon 18 TDS-C
LIGHTS	F: LiteMove (110 lux) / R: LiteMove (70 lux)
TIRES	Vittoria Terreno Dry TLR G2.0 650x47c
WHEELSET	FSA AGX i21 27.5" w/ Mahle X35
MOTOR	Mahle X35

360B - Everlasting Green, Gloss

<sup>\*</sup> Horizontal Top Tube Length. † Measured with 700x30c tires