




# ARGON 18



2012 Sizing charts

ROAD

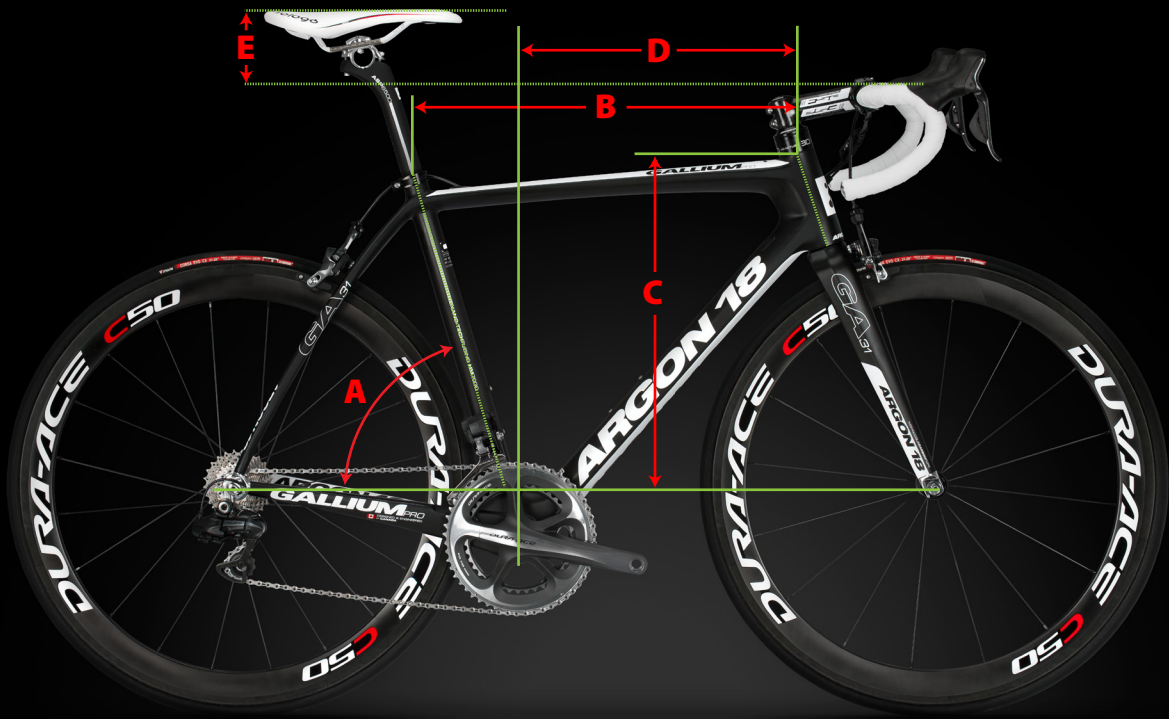


## Sizing Chart: Gallium Pro

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Minimum Drop	Maximum Drop
61	XXS	75,5	50	48,5	37,5	2	-3,5
62	XXS	75,5	50	48,5	37,5	1	-4,5
63	XXS	75,5	50	48,5	37,5	0	-5,5
64	XXS/XS	75,5-75	50-52	48,5-49	37,5-38,5	-1 / -0,5	-6,5 / -5,5
65	XXS/XS	75,5-75	50-52	48,5-49	37,5-38,5	-2 / -1,5	-7,5 / -6,5
66	XS	75	52	49	38,5	-2	-7,5
67	XS	75	52	49	38,5	-3	-8,5
68	XS	75	52	49	38,5	-4	-9,5
69	XS/S	75-74	52-54	49-52	38,5-39	-5 / -2,5	-10,5 / -7,5
70	XS/S	75-74	52-54	49-52	38,5-39	-6 / -3,5	-11,5 / -8,5
71	S	74	54	52	39	-4	-9,5
72	S	74	54	52	39	-5	-10,5
73	S	74	54	52	39	-6	-11,5
74	S/M	74-73,5	54-55,6	52-54,5	39-39,5	-7 / -4	-12,5 / -9,5
75	M	73,5	55,6	54,5	39,5	-5	-10,5
76	M	73,5	55,6	54,5	39,5	-6	-11,5
77	M/L	73,5-73	55,6-57,5	54,5-57	39,5-40	-7 / -5	-12,5 / -10
78	M/L	73,5-73	55,6-57,5	54,5-57	39,5-40	-8 / -6	-13 / -11
79	L	73	57,5	57	40	-6,5	-12
80	L	73	57,5	57	40	-7,5	-13
81	L	73	57,5	57	40	-8,5	-14
82	L/XL	73-72,5	57,5-59,5	57-59,5	40-40,5	-9,5 / -6,5	-15 / -12
83	XL	72,5	59,5	59,5	40-40,5	-7,5	-13
84	XL	72,5	59,5	59,5	40-40,5	-8,5	-14
85	XL	72,5	59,5	59,5	40-40,5	-9,5	-15

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**

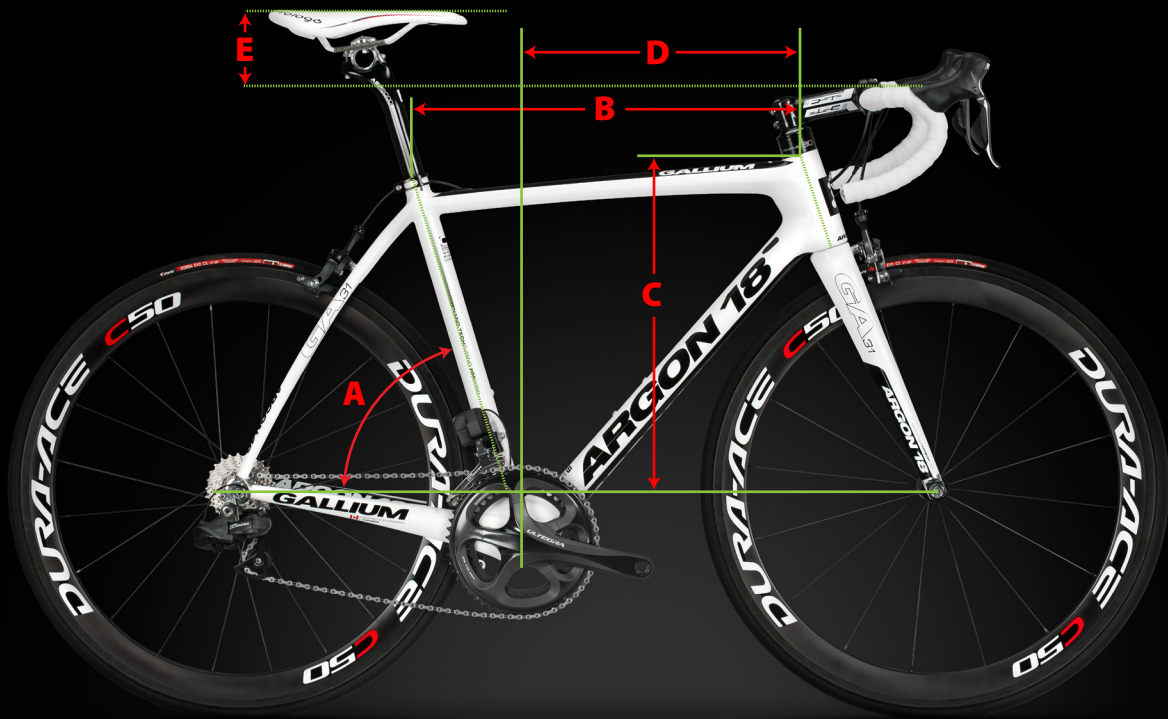


## Sizing Chart: Gallium

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Minimum Drop	Maximum Drop
61	XXS	75,5	50	48,5	37,5	2	-3,5
62	XXS	75,5	50	48,5	37,5	1	-4,5
63	XXS	75,5	50	48,5	37,5	0	-5,5
64	XXS/XS	75,5-75	50-52	48,5-49	37,5-38,5	-1 / -0,5	-6,5 / -5,5
65	XXS/XS	75,5-75	50-52	48,5-49	37,5-38,5	-2 / -1,5	-7,5 / -6,5
66	XS	75	52	49	38,5	-2	-7,5
67	XS	75	52	49	38,5	-3	-8,5
68	XS	75	52	49	38,5	-4	-9,5
69	XS/S	75-74	52-54	49-52	38,5-39	-5 / -2,5	-10,5 / -7,5
70	XS/S	75-74	52-54	49-52	38,5-39	-6 / -3,5	-11,5 / -8,5
71	S	74	54	52	39	-4	-9,5
72	S	74	54	52	39	-5	-10,5
73	S	74	54	52	39	-6	-11,5
74	S/M	74-73,5	54-55,6	52-54,5	39-39,5	-7 / -4	-12,5 / -9,5
75	M	73,5	55,6	54,5	39,5	-5	-10,5
76	M	73,5	55,6	54,5	39,5	-6	-11,5
77	M/L	73,5-73	55,6-57,5	54,5-57	39,5-40	-7 / -5	-12,5 / -10
78	M/L	73,5-73	55,6-57,5	54,5-57	39,5-40	-8 / -6	-13 / -11
79	L	73	57,5	57	40	-6,5	-12
80	L	73	57,5	57	40	-7,5	-13
81	L	73	57,5	57	40	-8,5	-14
82	L/XL	73-72,5	57,5-59,5	57-59,5	40-40,5	-9,5 / -6,5	-15 / -12
83	XL	72,5	59,5	59,5	40-40,5	-7,5	-13
84	XL	72,5	59,5	59,5	40-40,5	-8,5	-14
85	XL	72,5	59,5	59,5	40-40,5	-9,5	-15

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**

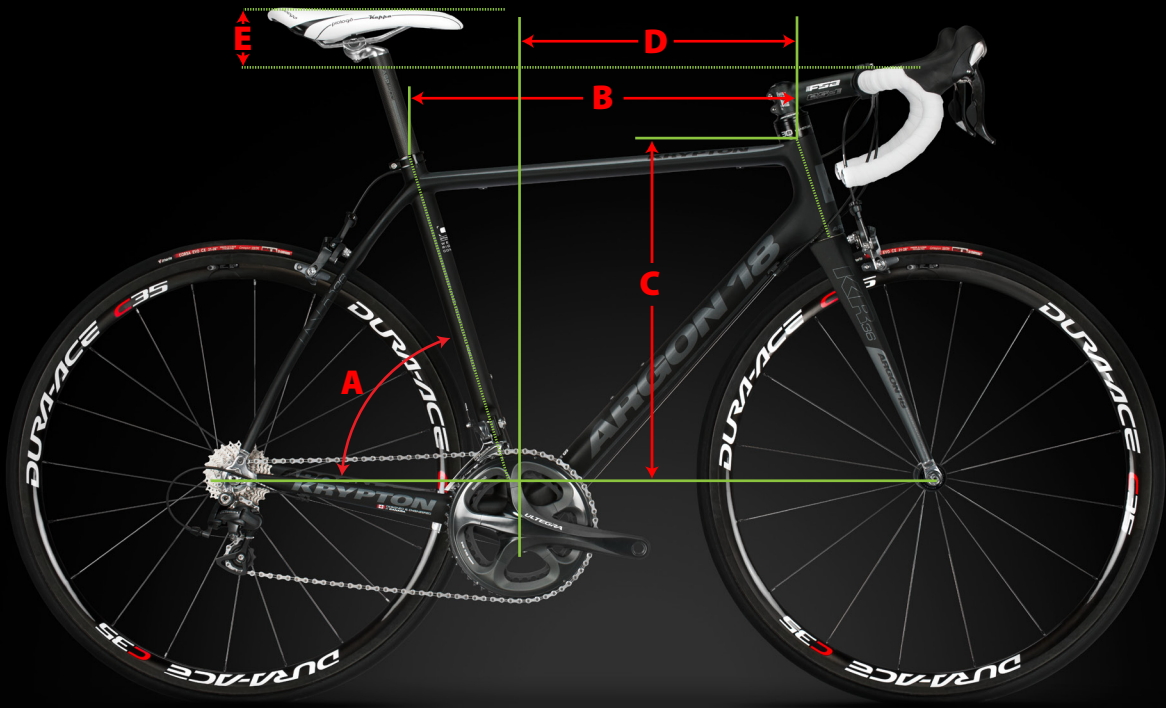


## Sizing Chart: Krypton

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Minimum Drop	Maximum Drop
61	XXS	75,5	50	49	37,5	3	-2,5
62	XXS	75,5	50	49	37,5	2	-3,5
63	XXS	75,5	50	49	37,5	1	-4,5
64	XXS/XS	75,5-75	50-52	49-49,5	37,5-38	0 / 1	-5,5 / -4
65	XXS/XS	75,5-75	50-52	49-49,5	37,5-38	-1 / 0,5	-6,5 / -5
66	XS	75	52	49,5	38	-0,5	-6
67	XS	75	52	49,5	38	-1,5	-7
68	XS/S	75-74	52-54	49,5-52,5	38-39	-2,5 / -0,5	-8 / -5,5
69	XS/S	75-74	52-54	49,5-52,5	38-39	-3,5 / -1	-9 / -6,5
70	S	74	54	52,5	39	-2	-7,5
71	S	74	54	52,5	39	-3	-8,5
72	S/M	74-73,5	54-56	52,5-55	39-39,5	-4 / -1,5	-9,5 / -7
73	S/M	74-73,5	54-56	52,5-55	39-39,5	-5 / -2,5	-10,5 / -8
74	M	73,5	56	55	39,5	-3,5	-9
75	M	73,5	56	55	39,5	-4,5	-10
76	M	73,5	56	55	39,5	-5,5	-11
77	M/L	73,5-73,15	56-57	55-57,5	39,5-40	-6,5 / -4	-12 / -9
78	M/L	73,5-73,15	56-57	55-57,5	39,5-40	-7,5 / -4,5	-13 / -10
79	L	73,15	57	57,5	40	-5,5	-11
80	L	73,15	57	57,5	40	-6,5	-12
81	L/XL	73,15-72,5	57-59	57,5-59,5	40-40,5	-7,5 / -5,5	-13 / -10,5
82	L/XL	73,15-72,5	57-59	57,5-59,5	40-40,5	-8,5 / -6	-14 / -11,5
83	XL	73	59	59,5	40,5	-7	-12,5
84	XL	73	59	59,5	40,5	-8	-13,5
85	XL	73	59	59,5	40,5	-9	-14,5

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**

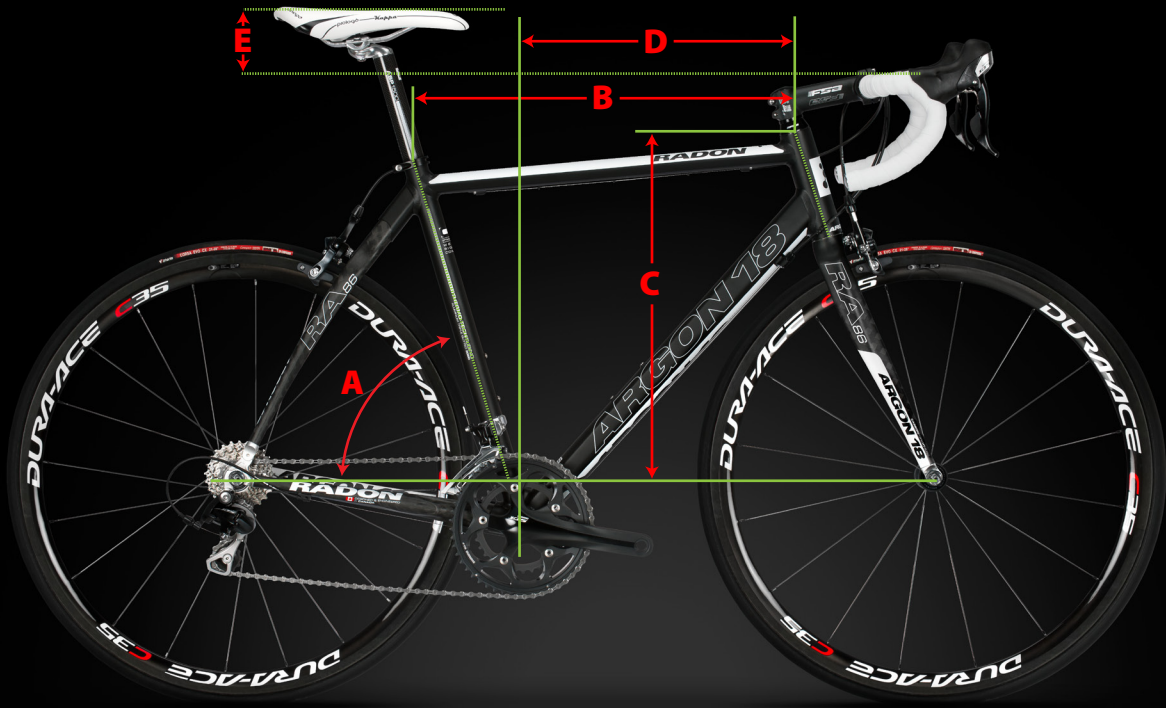


## Sizing Chart: Radon

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Minimum Drop	Maximum Drop
61	XXS	75,5	50	49,5	37,5	3,5	0,5
62	XXS	75,5	50	49,5	37,5	2,5	-0,5
63	XXS	75,5	50	49,5	37,5	1,5	-1,5
64	XXS/XS	75,5-75	50-52	49,5-51	37,5-38	0,5/2	-2,5/-1
65	XXS/XS	75,5-75	50-52	49,5-51	37,5-38	-0,5/1	-1,5/-2
66	XS	75	52	51	38	0	-3
67	XS	75	52	51	38	-1	-4
68	XS/S	75-74	52-54	51-53	38-39	-2/0	-5/-3
69	XS/S	75-74	52-54	51-53	38-39	-3/-1	-6/-4
70	S	74	54	53	39	-2	-5
71	S	74	54	53	39	-3	-6
72	S/M	74-73,5	54-56	53-55,5	39-39,5	-4/-1	-7/-4
73	S/M	74-73,5	54-56	53-55,5	39-39,5	-5/-2	-8/-5
74	M	73,5	56	55,5	39,5	-3	-6
75	M	73,5	56	55,5	39,5	-4	-7
76	M	73,5	56	55,5	39,5	-5	-8
77	M/L	73,5-73,15	56-57	55,5-58	39,5-40	-6/-3	-9/-6
78	M/L	73,5-73,15	56-57	55,5-58	39,5-40	-7/-4	-10/-7
79	L	73,15	57	58	40	-5	-8
80	L	73,15	57	58	40	-6	-9
81	L/XL	73,15-72,5	57-59	58-61	40-40,5	-7/-4	-10/-7
82	L/XL	73,15-72,5	57-59	58-61	40-40,5	-8/-5	-11/-8
83	XL	73	59	61	40,5	-6	-9
84	XL	73	59	61	40,5	-7	-10
85	XL	73	59	61	40,5	-8	-11

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**

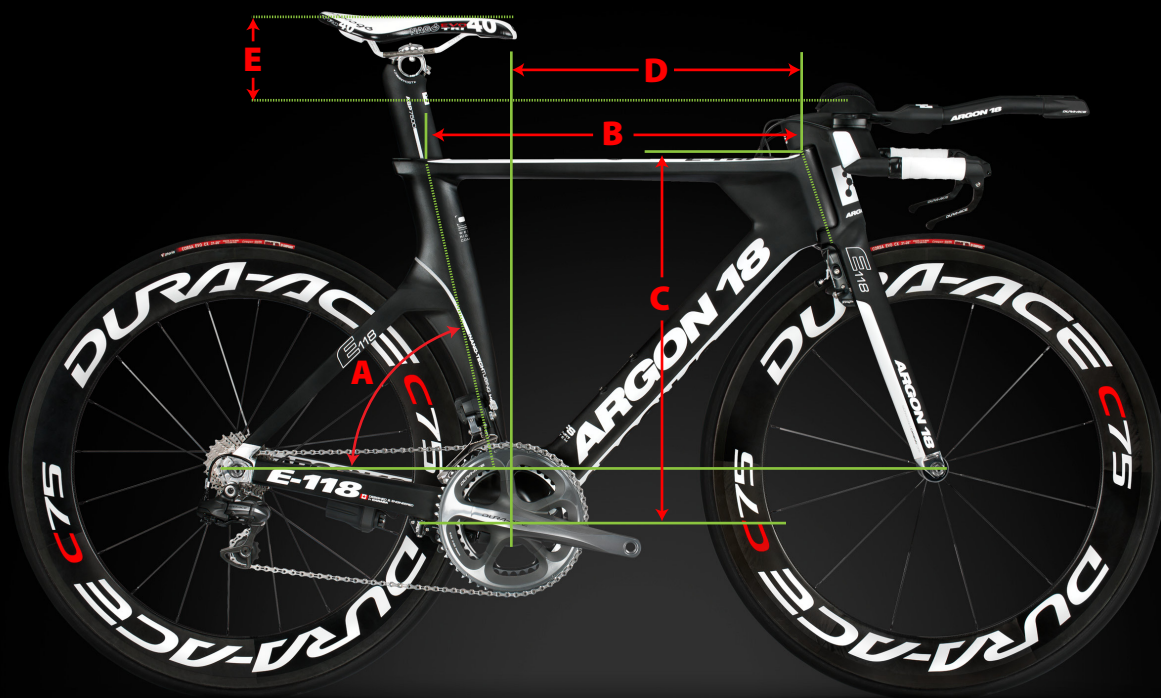


## Sizing Chart: E-118

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Maximum Drop	Minimum Drop
63	XS	76-78	52	490	400	-5.5	4.5
64	XS	76-78	52	490	400	-6.5	3.5
65	XS	76-78	52	490	400	-7.5	2.5
66	XS	76-78	52	490	400	-8.5	1.5
67	XS	76-78	52	490	400	-9.5	0.5
68	XS	76-78	52	490	400	-10.5	-0.5
69	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-11,5 / -10,5	-1,5 / -0,5
70	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-12,5 / -11,5	-2,5 / -1,5
71	S	76-78	53.5	500	410	-12.5	-2,5
72	S	76-78	53.5	500	410	-13.5	-3,5
73	S	76-78	53.5	500	410	-14.5	-4,5
74	S/M	76-78	53,5 / 55	500 / 510	410 / 420	-15,5 / -14,5	-5,5 / -4,5
75	M	76-78	55	510	420	-15.5	-5,5
76	M	76-78	55	510	420	-16.5	-6,5
77	M	76-78	55	510	420	-17.5	-7,5
78	M	76-78	55	510	420	-18.5	-8,5
79	M/L	76-78	55 / 56	510 / 540	420 / 425	-19,5 / -16,5	-9,5 / -6,5
80	L	76-78	56	540	425	-17.5	-7,5
81	L	76-78	56	540	425	-18.5	-8.5
82	L	76-78	56	540	425	-19.5	-9.5
83	L	76-78	56	540	425	-20.5	-10.5
84	L	76-78	56	540	425	-21.5	-11.5
85	L	76-78	56	540	425	-22.5	-12.5
86	L	76-78	56	540	425	-23.5	-13.5

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



# ARGON 18

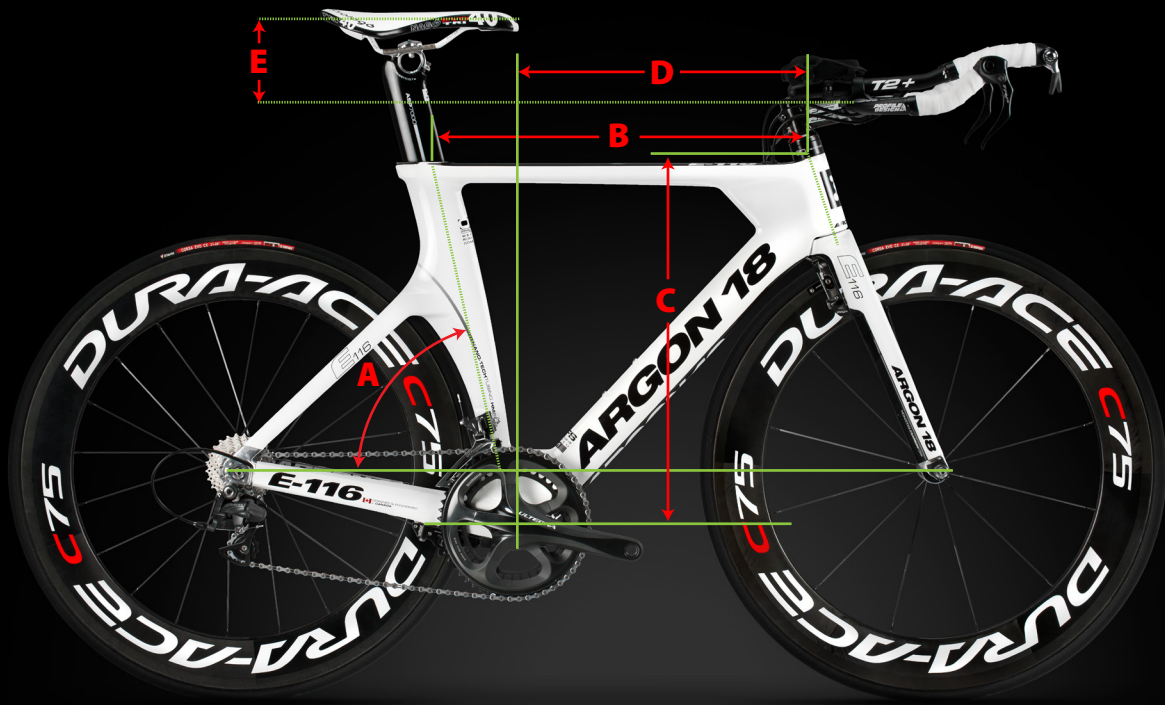


## Sizing Chart: E-116

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Maximum Drop	Minimum Drop
63	XS	76-78	52	490	400	-5.5	4.5
64	XS	76-78	52	490	400	-6.5	3.5
65	XS	76-78	52	490	400	-7.5	2.5
66	XS	76-78	52	490	400	-8.5	1.5
67	XS	76-78	52	490	400	-9.5	0.5
68	XS	76-78	52	490	400	-10.5	-0.5
69	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-11,5 / -10,5	-1,5 / -0,5
70	XS/S	76-78	52 / 53,5	490 / 500	400 / 410	-12,5 / -11,5	-2,5 / -1,5
71	S	76-78	53.5	500	410	-12.5	-2,5
72	S	76-78	53.5	500	410	-13.5	-3,5
73	S	76-78	53.5	500	410	-14.5	-4,5
74	S/M	76-78	53,5 / 55	500 / 510	410 / 420	-15,5 / -14,5	-5,5 / -4,5
75	M	76-78	55	510	420	-15.5	-5,5
76	M	76-78	55	510	420	-16.5	-6,5
77	M	76-78	55	510	420	-17.5	-7,5
78	M	76-78	55	510	420	-18.5	-8,5
79	M/L	76-78	55 / 56	510 / 540	420 / 425	-19,5 / -16,5	-9,5 / -6,5
80	L	76-78	56	540	425	-17.5	-7,5
81	L	76-78	56	540	425	-18.5	-8,5
82	L	76-78	56	540	425	-19.5	-9,5
83	L	76-78	56	540	425	-20.5	-10,5
84	L	76-78	56	540	425	-21.5	-11,5
85	L	76-78	56	540	425	-22.5	-12,5
86	L	76-78	56	540	425	-23.5	-13,5

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**

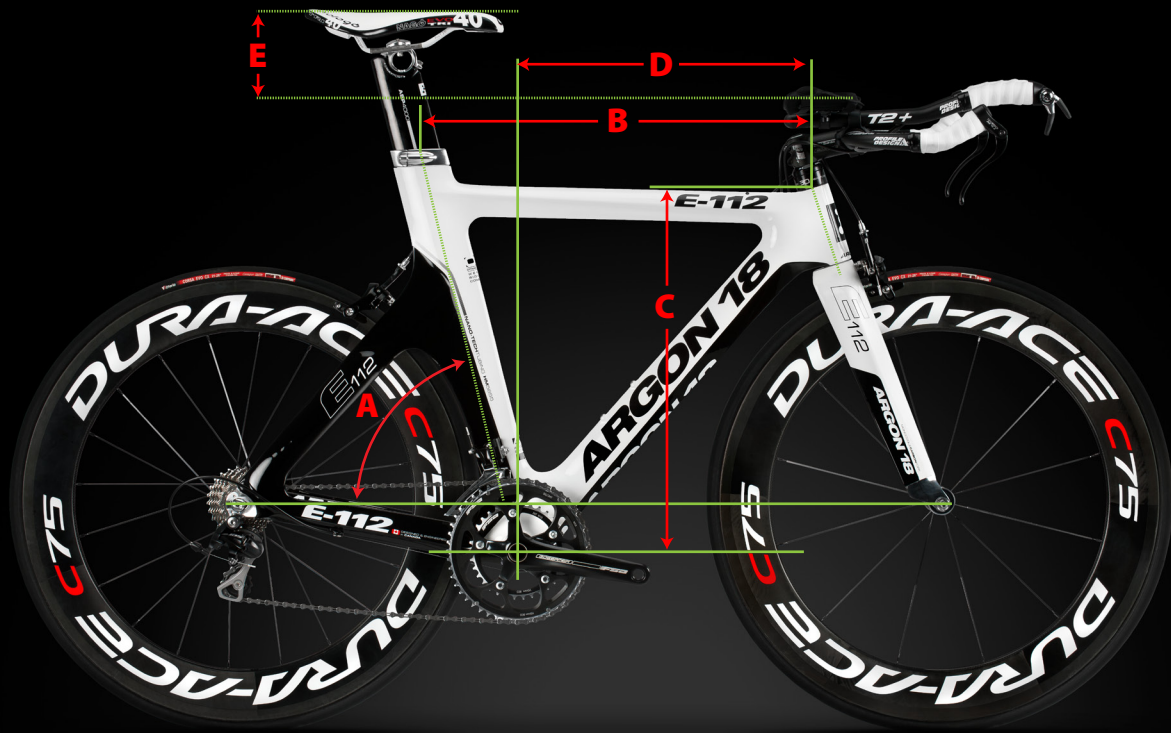

## Sizing Chart: E-112


Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Maximum Drop	Minimum Drop
63	XS	76-78	52	485	400	-6	4
64	XS	76-78	52	485	400	-7	3
65	XS	76-78	52	485	400	-8	2
66	XS	76-78	52	485	400	-9	1
67	XS	76-78	52	485	400	-10	0
68	XS	76-78	52	485	400	-11	-1
69	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-12 / -11	-2 / -1
70	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-13 / -12	-3 / -2
71	S	76-78	53.5	495	410	-13	-3
72	S	76-78	53.5	495	410	-14	-4
73	S	76-78	53.5	495	410	-15	-5
74	S/M	76-78	53,5 / 55	495 / 505	410 / 420	-16 / -15	-6 / -5
75	M	76-78	55	505	420	-16	-6
76	M	76-78	55	505	420	-17	-7
77	M	76-78	55	505	420	-18	-8
78	M	76-78	55	505	420	-19	-9
79	M/L	76-78	55 / 56	505 / 535	420 / 425	-20 / -17	-10 / -7
80	L	76-78	56	535	425	-18	-8
81	L	76-78	56	535	425	-19	-9
82	L	76-78	56	535	425	-20	-10
83	L	76-78	56	535	425	-21	-11
84	L	76-78	56	535	425	-22	-12
85	L	76-78	56	535	425	-23	-13
86	L	76-78	56	535	425	-24	-14

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**



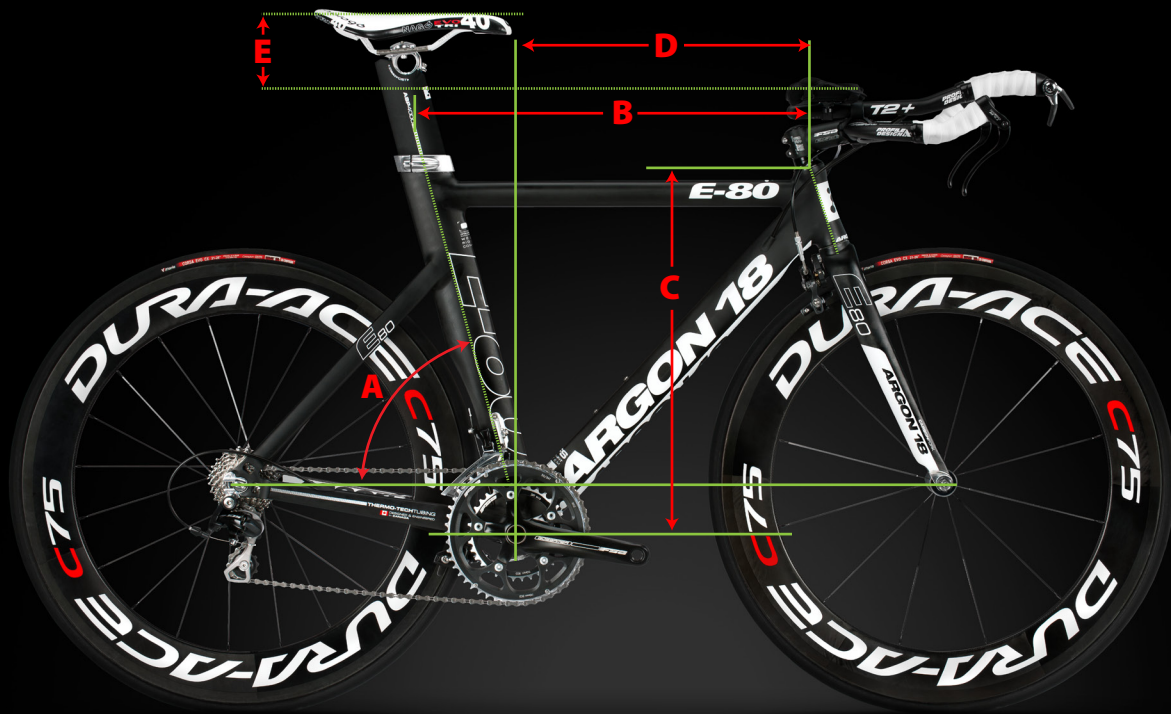

## Sizing Chart: E-80

Saddle Height	Suggested Size	<b>A</b> Seat Tube Angle	<b>B</b> Top Tube	<b>C</b> Stack	<b>D</b> Reach	<b>E</b> Maximum Drop	Minimum Drop
63	XS	76-78	52	485	400	-6	4
64	XS	76-78	52	485	400	-7	3
65	XS	76-78	52	485	400	-8	2
66	XS	76-78	52	485	400	-9	1
67	XS	76-78	52	485	400	-10	0
68	XS	76-78	52	485	400	-11	-1
69	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-12 / -11	-2 / -1
70	XS/S	76-78	52 / 53,5	485 / 495	400 / 410	-13 / -12	-3 / -2
71	S	76-78	53.5	495	410	-13	-3
72	S	76-78	53.5	495	410	-14	-4
73	S	76-78	53.5	495	410	-15	-5
74	S/M	76-78	53,5 / 55	495 / 505	410 / 420	-16 / -15	-6 / -5
75	M	76-78	55	505	420	-16	-6
76	M	76-78	55	505	420	-17	-7
77	M	76-78	55	505	420	-18	-8
78	M	76-78	55	505	420	-19	-9
79	M/L	76-78	55 / 56	505 / 535	420 / 425	-20 / -17	-10 / -7
80	L	76-78	56	535	425	-18	-8
81	L	76-78	56	535	425	-19	-9
82	L	76-78	56	535	425	-20	-10
83	L	76-78	56	535	425	-21	-11
84	L	76-78	56	535	425	-22	-12
85	L	76-78	56	535	425	-23	-13
86	L	76-78	56	535	425	-24	-14

This chart indicates recommended values. Max and min drop values are calculated according to Canadian specifications. Please consult one of our authorized dealers for further informations on your bike fit.



**ARGON 18**