

DIVERTER VALVES

DD Series

DISC DIVERTER VALVES




UNITED PROCESS VALVES DISC TYPE DIVERTER VALVES

Code: **DPS4**

Disc Diverter Valves

The United Process Valves disc type diverter valve is designed to divert one main flow into two separate flows. These valves are designed to minimize retention areas. They are often used as reactor isolation valves in polymer processes. Equipped with the vacuum package they are ideal for full vacuum applications in combination with high temperatures. The valves are bi-directional. Upon opening, the discs retract completely into the valve body. This provides an unrestricted full flow. In combination with our maximized port sizes this design offers maximum flow capacity. United Process Valves disc diverter valves are available in a choice of options including materials of construction, seat arrangements and actuators. Other features include full jacketing, vacuum package and a wide array of body arrangements.

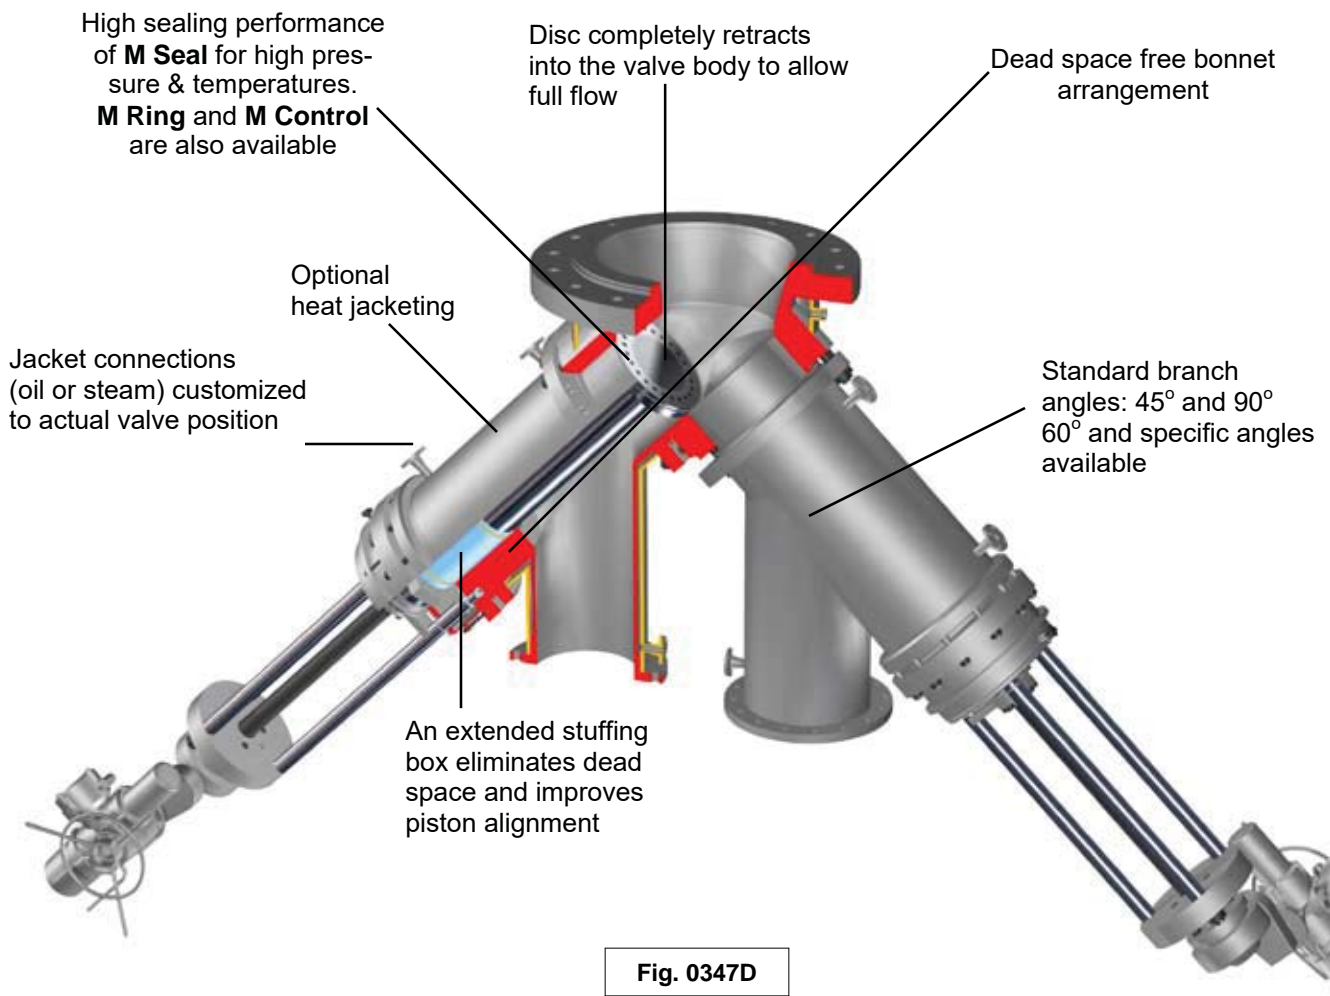

BODY ARRANGEMENTS

United Process Valves **Disc Diverter Valves** use two basic designs:

- Figure **346** is used for small sizes or high pressure applications. Valves have a rising stem design.
- Figure **347** is used for large size valves or low pressure applications. These valves use a non-rising stem design.

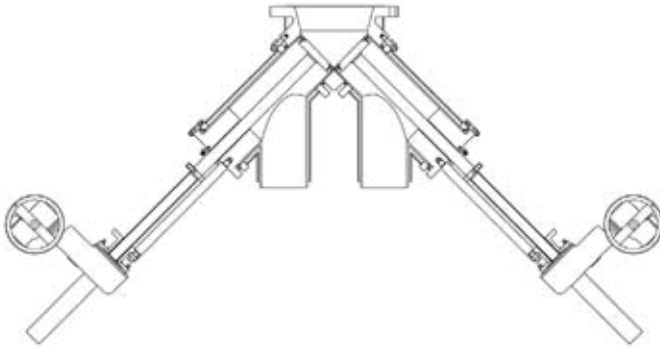


Fig. 346M

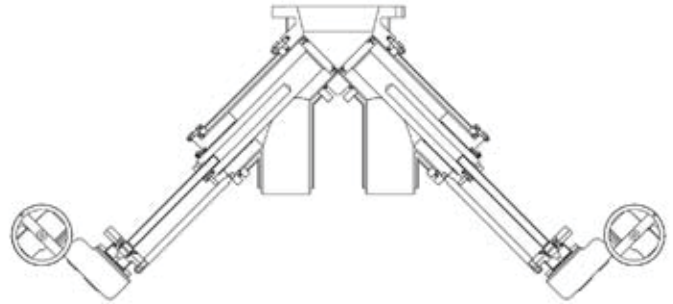


Fig. 347M

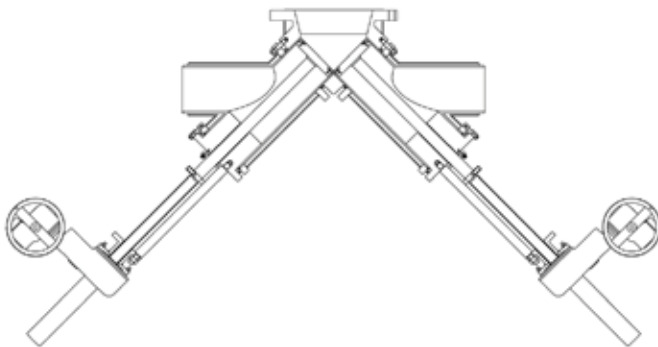


Fig. 346T

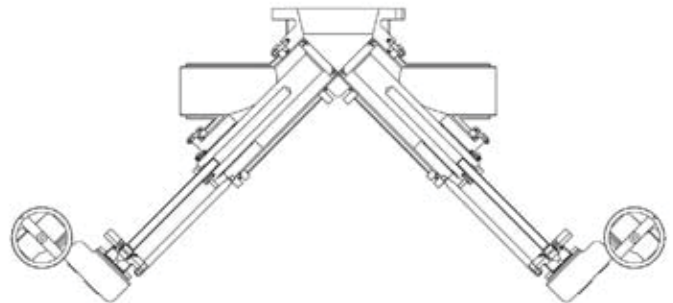


Fig. 347T

TEMPERATURE PROBE IN THE DISC

A bottom valve is located in the middle of your process. For this reason an optional temperature probe installed in the disc will provide you with temperature information without the need of extra nozzles or reactor modifications.

Valve / Disc Assembly



Single or double PT100
temperature probe.
Explosion-proof or standard.
Temperature range:
-50° C / 400° C
-60° F / 750° F

RANGE DEFINITION

DD Manufacturing Range	PN 10	PN 16	PN 20- 150 lbs.	PN 25	PN 40	PN 50 300 lbs.	PN64 400 lbs.	PN 100 600 lbs.	PN 150/160-900 lb	PN 250 -1500 lb	PN 320	PN 420—2500 lb	PN 630 —4500 lb
3/8"- DIN10													
1/2"- DIN15													
3/4"- DIN20													
1"- DIN25													
1 1/4"- DIN32													
1 1/2"- DIN40													
2"- DIN50													
2 1/2"- DIN65													
3"- DIN80													
4"- DIN100													
5"- DIN125													
6"- DIN150													
8"- DIN200													
10"- DIN250													
12"- DIN300													
14"- DIN350													
16"- DIN400													
18"- DIN450													
20"- DIN500													
24"- DIN600													
28"- DIN700													
32"- DN800													
36"- DN900													
40"- DN1000													
44"-DN1100													
48"- DN1200													

Fig. 346

Fig. 347

STEM LOCKING DEVICE

When safety regulations require an additional locking device to keep a valve closed, United Process Valves offers two different arrangements.

Arrangement A
A special half pipe blocks the stem within the top works and prevents valve from stroking




Arrangement B
Lockable handwheel



SEALING SYSTEMS

M Seal-

This sealing system offers a wide range of material combinations selected to create a differential hardness between body and plunger seat. The maintenance friendly design of the **M Seal** system provides long & reliable valve performance and is suitable for almost all process conditions.

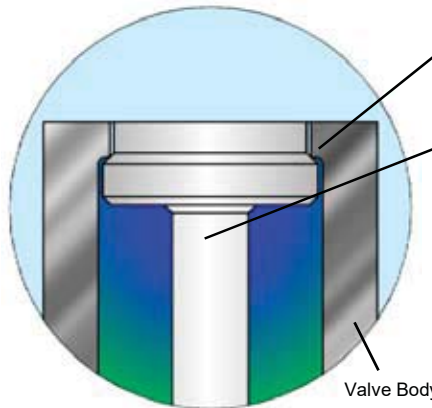

Greater hardness on body seat assures that wear occurs on piston first. Easy maintenance is key

One piece piston design minimizes dead areas


Temperature

Min: -200° C / -330° F
Max: 815° C / 1500° F

Pressure

Max: 630 bar / 9000 psig

Dual Seal- The **Dual Seal** is a unique double sealing system that works like a piston operating within a cylindrical seat. Unlike other designs, the secondary resilient seal ring is mounted on the piston and will expand after metal to metal contact of the primary seat ring. The design provides a true metal to metal seal in case of resilient seat failure.

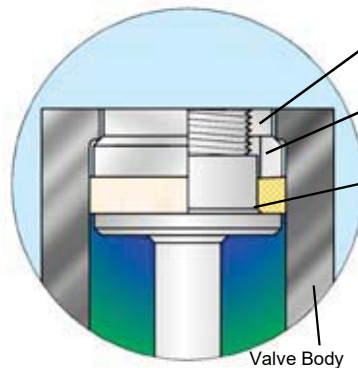

Locking nut is secured by a tack

The primary metal to metal seal ring compresses the secondary resilient seal ring

A secondary seal ring is made of resilient material like PTFE, PTFE glass filled


Temperature

Min: -50° C / -60° F
Max: 200° C / 450° F

Pressure

Max: 250 bar / 3550 psig
& full vacuum

M Ring Seal- The **M Ring Seal** is also based on a differential hardness between the body and the piston surface. The replaceable metallic seal ring made of aluminum, nickel or titanium provides excellent sealing performance especially in applications that combine full vacuum and temperatures above 200° C.

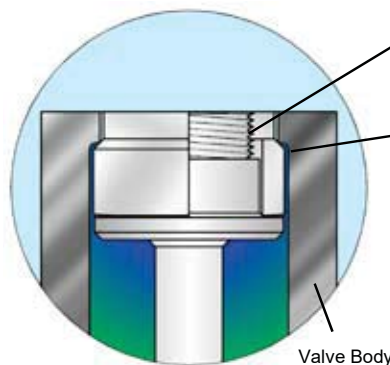

Locking nut is secured by a tack weld

Resilient metal ring seals between the body seat and disc and provides high performance sealing for vacuum and high temperature applications

Temperature

Min: -200° C / -330° F
Max: 450° C / 840° F

Pressure

Max: 250 bar / 3550 psig
& full vacuum


PACKING DEFINITION

Typical Packing Materials:

- PTFE
- PTFE / Aramide Braid
- Carbon / Graphite Braid
- Graphite Braid
- PTFE / Aramide Braid + Graphite
- Lamellar + Expanded Graphite
- Pure Graphite

Live loaded packing arrangement minimizes maintenance

Back seat arrangement is standard on this valve

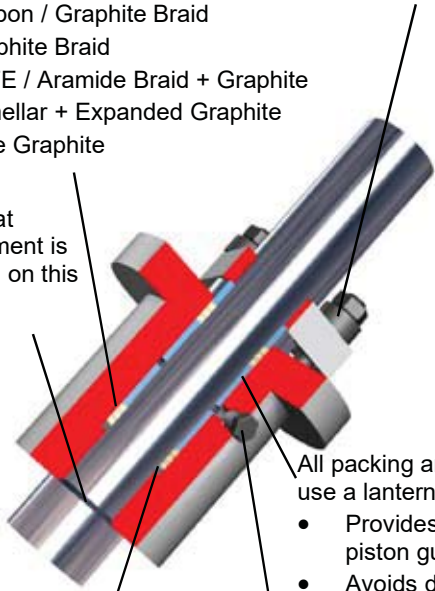

All packing arrangements use a lantern ring that:

- Provides better stem piston guiding
- Avoids dead space in body cavities


Bottom ring material is selected with a differential hardness from the piston to prevent piston damage

Optional 1/4 inch NPTF can be used for leak detection or inert gas injection to avoid leakage to atmosphere by creating an over pressure

STANDARD BODY GASKET RANGE

- PTFE
- Aramide / Nitrile
- Carbon / Aramide
- Laminated Graphite
- Laminated Graphite / 316
- Spiral Wound 316L / PTFE
- Spiral Wound 316L / Graphite
- Spiral Wound 321 / Graphite
- Spiral Wound Inconel / Graphite
- Spiral Wound Titanium / Graphite
- Welded Lips

JACKET CONNECTIONS

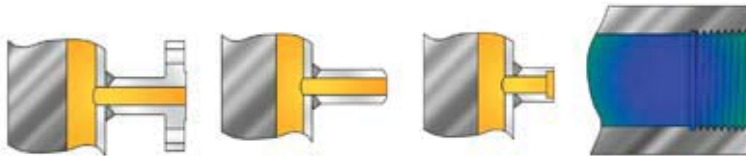

Flanges
ANSI, DIN, JIS


Butt Weld

Socket Weld,
NPI

Threaded
connections
NPT & BSP

VACUUM HOOD

For valves on full vacuum service United Process Valves offers a special **vacuum package** that maintains tightness to atmosphere. Valves with this package are usually equipped with an **M Ring Seal** design as process sealing. The system uses a replaceable aluminium or nickel seal ring and provides high vacuum performance. This special **vacuum package** provides zero leakage between atmosphere and process.

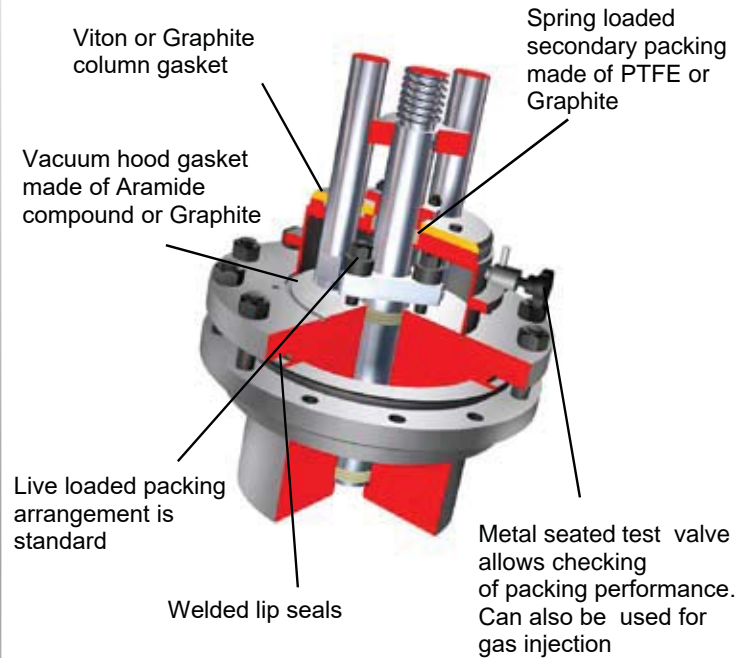

Viton or Graphite column gasket

Spring loaded secondary packing made of PTFE or Graphite

Vacuum hood gasket made of Aramide compound or Graphite

Live loaded packing arrangement is standard

Welded lip seals

Metal seated test valve allows checking of packing performance. Can also be used for gas injection

Valve Coding System

	D	P	S	2	R	J
D Diverter Valve						
P Piston D Disc A Accessories						
S Straight T T Design Y Y Design \$ Special						
2 2 Valves 3 3 Valves 4 4 Valves 6 6 Valves \$ Special						
M M Seal C M Control D Dual Seal R M Ring Seal						
J Jacketed - Non-Jacketed						

TECHNICAL & GENERAL INFORMATION

Design Code & Construction

- Design standard compliant with ASME B16.34
- International standards include ANSI, DIN, JIS, API etc.
- Wide range of material selections including carbon steel / stainless steel / Titanium / Hastelloy / Duplex / Monel / Tantalum / Zirconium
- Fabricated, cast, forged and bar stock designs
- Combinations of fabricated, sand and investment casings, and bar stock available

Surface Finish

- For polymer applications, United Process Valves recommends a surface finish of Ra 0.4 for all parts are in contact with the medium.

Quality assurance & testing

- ISO 9001 compliant
- ISO 15848 1 & 2, low emission testing and certification available
- PED / ATEX / CE marking
- Standard testing procedures

LINE & BRANCH CONNECTIONS




Flanges
ANSI, DIN, JIS



Heated
Flanges




Socket
Weld



Threaded
connections
NPT & BSP



Butt
Weld



Fast Bolting Union
Graylock Securamax

ACTUATION OPTIONS



Hand Wheel



Bevel Gear



Electric Actuator



Air Motor



Double or single
acting Air Cylinder



Double or single acting Air
Cylinder with Safety Hand Wheel



Double or single acting Air
Cylinder with side mounted
Safety Hand Wheel



Hydraulic
Cylinder

The Strahman United Process Valves products include:

PISTON TYPE SAMPLING VALVES

Strahman United Process Valves has a full line of sampling valves that produce live samples without exception. Our sampling valves unique design prevent failure caused by sediment or clogging.

PISTON TYPE DRAIN VALVES

Strahman United Process Valves Drain Valves are designed to prevent clogging. They are ideal for use in liquid and gas service or with slurries, polymers, and high viscosity fluids that tend to solidify at room temperature.

PISTON & DISC TYPE IN-LINE VALVES

Strahman United Process Valves Piston and Disc Type In-Line Valves alternative to a failing ball, plug or gate valve. With a wide range of positive sealing systems like M Seal, M Ring Seal and M Control, these valves provide superior in-line tightness. When opening the piston or disc it retracts completely into the valve body providing an unrestricted full flow

PISTON & DISC TYPE DIVERTER VALVES

Strahman United Process Valves Diverter Valves are designed to divert process flows with high and low viscosity. They are dead space free to prevent clogging. They are ideal for use in liquid and gas service or with slurries, polymers, and high viscosity fluids that tend to solidify at room temperature.

SINGLE & DOUBLE DISC SLAB GATE VALVES

Strahman United Process Valves Single & Double Disc Slab Gate Valves are specifically designed for use in transfer line and decoking valves for ethylene cracking units and isolation applications in FCCU (fluid catalytic cracking unit) and DCU (delayed coker unit) plants. The safety and continuous production of process plants often depend on the reliability of these "key-equipment" valves.

LINE BLINDS

Strahman United Process Valves Line Blinds provide zero leakage down stream and total isolation on process pipelines, vessels, and maritime applications. No pipeline movement is required when blind position is changed.

Please contact your local Strahman United Process Valves representative
for further details or

visit our website : www.strahman-unityprocessvalves.com



Established 1986

Strahman United Process Valves France
136 rue Sommeiller, ZA Savoie Hexapole
F-73420, Mery, France
Tel: + 33 4 79 35 78 00
E-Mail: upvsales@upvalves.com

Strahman United Process Valves German Office
Allerheiligenstrasse 69
D-77855 Achern, Germany
Tel: +49 (0) 170 9766629

Strahman United Process Valves Shanghai, China Office
Tel: +86 189 1751 7369

ISO 9001 Certified

Last Updated July 2023