
***VFSS STRETCHER-CHAIR**

SPECIFICATION DESCRIPTION

Maximum Patient Weight Seat Height, Low Seat Height, High Seat Cushion Height, Front (tapered) Seat Cushion Height, Back (tapered) Back Cushion Height Seat Width Back Width (no extension) Back Width (w/ optional extension) Radiolucent Window (width x height) Overall Width (rails up) Patient Surface Length (standard) Patient Surface Length (w/ manual folding footrest) Overall Chair Height, Low Overall Chair Height, High **Backrest Articulation** Side Rail Height When Up (seat pan to rail top) Side Rail Length Wheelbase (length x width) (standard) Wheelbase (length x width) (S short option)

SPECIFICATION MEASUREMENT

350 lb. (159 kg.) 25.1 in. (64 cm.) 33 in. (83.82 cm.) 3.25 in. (8.26 cm.) 2.25 in. (5.08 cm.) 33 in. (83.82 cm.) 24 in. (61 cm.) 15 in. (38 cm.) 24 in. (61 cm.) 13 in. x 26 in. (33 cm. x 65 cm.) 30.5 in. (77.47 cm.) 77 in. (195.58 cm.) 70.4 in. (179 cm.) 55.5 in. (141 cm.) 63 in. (160 cm.) 0° - 86° 10.88 in. (27.64 cm.) 21.1 in. (54 cm.) 30 in. x 20 in. (76 cm. x 51 cm.) 26 in. x 20 in. (66 cm. x 51 cm.)

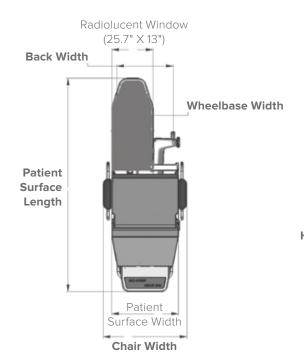

Seat Height Wheelbase Length Overall Chair Length




ONE PATIENT, ONE SURFACE®

TMM3 STRETCHER-CHAIR SPECIFICATIONS

CHARGING SYSTEM

Input, Volts 100 VAC - 240 VAC Input, Current Input, Frequency Output Maximum Power 24V – 4.5Ah Sealed Lead Acid Battery Mode of Operation

PENDANT FUNCTIONS

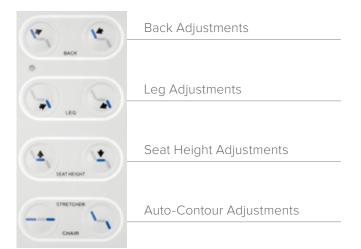

*VFSS = Video Fluoroscopy Swallow Study NOTE: Winco Mfg., LLC reserves the right to revise specifications without notice.





CONTACT US

To arrange a demonstration or to speak with one of our associates, please feel free to contact us at: 800-237-3377 | WincoMfg.com | 5516 SW 1st Lane, Ocala, FL 34474 | Info@WincoMfg.com

POWER SPECIFICATION

1.0 A (max) 50 HZ / 60 HZ +24 DC 1.4 A 36 W 1 Min Load / 9 Min Rest