



OXE225

607 NM (447 FT-LB) OF TORQUE

oxemarine.com


OXE225

The OXE Diesel outboards combine the reliability of an inboard with the flexibility of an outboard. A more environmentally friendly solution, the OXE Diesels offers increased serviceability, longer lifespan, lower emissions and fuel consumption. Operational range is increased by over 60%, compared to a gasoline outboard.


All OXE Diesel outboards are certified in compliance with regulations set forth in EPA TIER III, IMO TIER II (MARPOL VI TIER 2), RCD,

The OXE225 is a bi-turbo configuration that provides its full 615Nm of torque at the propeller. The power and high torque of the marinized diesel block in the OXE225 proves for an enduring and relentless product, applicable in diverse settings as both a workhorse and a high-speed solution, as well as revolutionary bollard pulling power.


Learn more at oxemarine.com

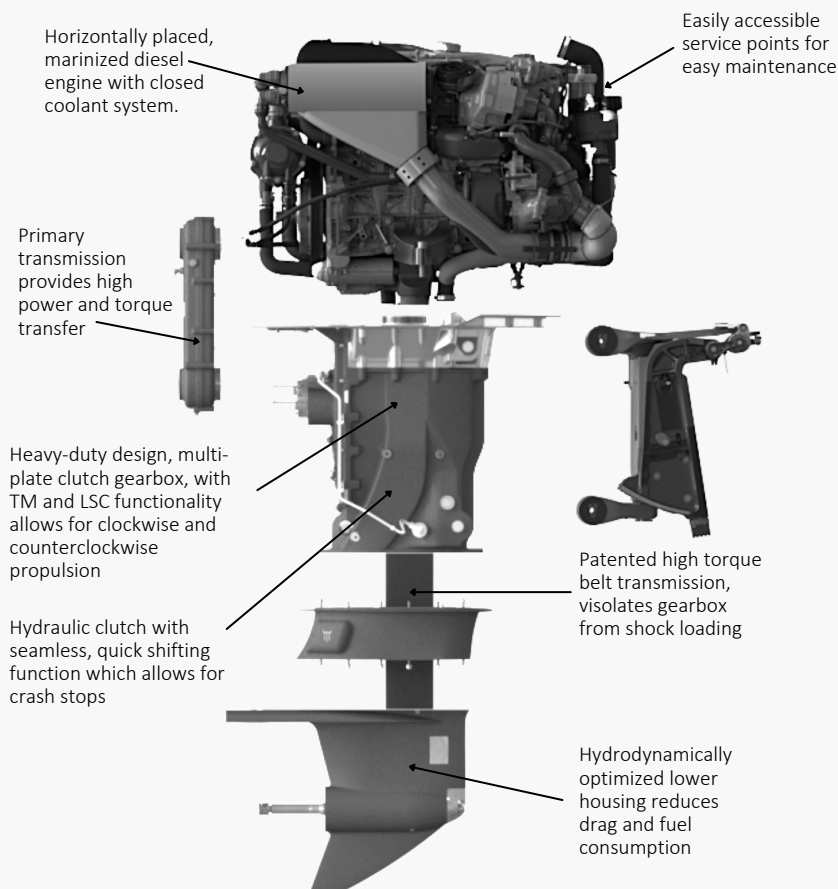

Performance

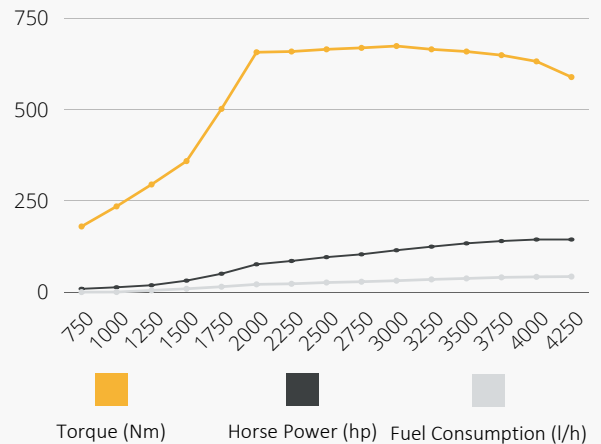

Consumption, Range and Emissions

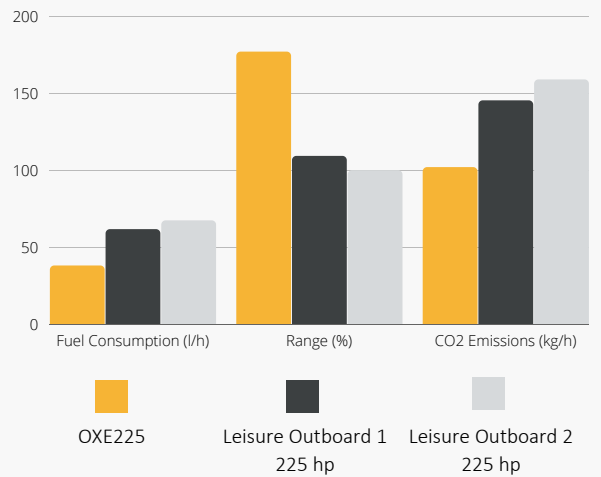

SERVICE INTERVAL: 200 hrs / 800 hrs

ENGINE TYPE: Diesel engine, L6.

DISPLACEMENT: 3.0 L

INTAKE: Turbocharged, intercooled

TORQUE: 670 Nm at 2250 rpm

POWER: 225 hp at 3800 rpm

FUEL: Diesel EN 590, ASTM D 975 No.1 No.2. JIS KK2204, F54 & F75, biofuels: HVO100 and B7

WEIGHT: 25" 430 kg (947 lb), 33" 435 kg (959 lb)

ALTERNATOR OUTPUT: 180 Amp

RIG LENGTH: 25" or 33"

COOLING: Closed cooling circuit

STARTING: Electric

STEERING OPTIONS: Hydraulic, Electronic Power Steering, Joystick

SHIFT: CANbus, Electro-hydraulic

CLUTCH: Hydraulic multi-friction plate

GEAR RATIOS: 1.39:1

DIMENSIONS: (25" leg), L1150 H2090 W700 (mm)



OXE250

755NM (557FT-LB) OF TORQUE

oxemarine.com

TECHNICAL SPECIFICATION


OXE250

The OXE Diesel outboards combine the reliability of an inboard with the flexibility of an outboard. A more environmentally friendly solution, the OXE Diesels offers increased serviceability, longer lifespan, lower emissions and fuel consumption. Operational range is increased by over 60%, compared to a gasoline outboard.


All OXE Diesel outboards are certified in compliance with regulations set forth in EPA TIER III, IMO TIER II (MARPOL VI TIER 2), RCD,

The OXE250 is a bi-turbo configuration that provides its full 755Nm of torque at the propeller. The power and high torque of the marinized diesel block in the OXE250 proves for an enduring and relentless product, applicable in diverse settings as both a workhorse and a high-speed solution, as well as revolutionary bollard pulling power.


Learn more at oxemarine.com

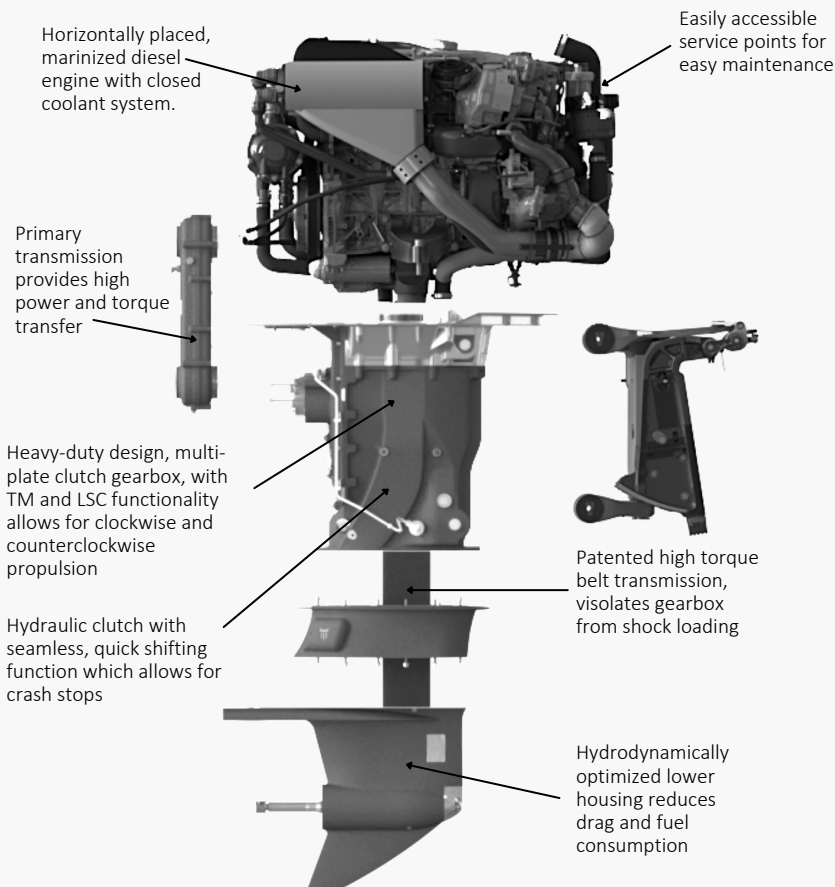

Performance

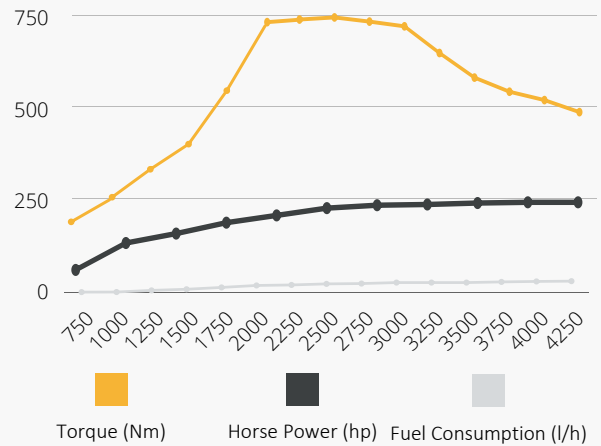

Consumption, Range and Emissions

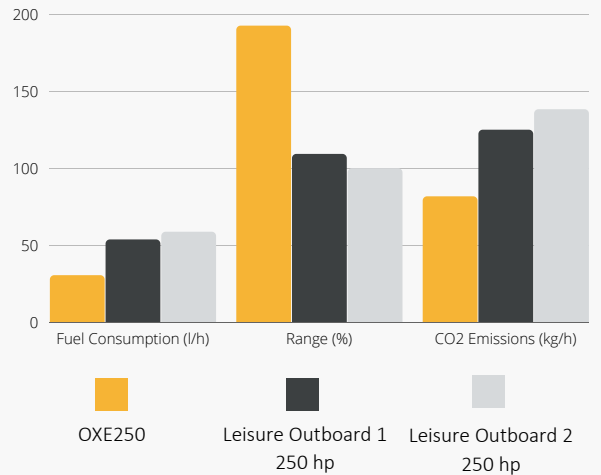

SERVICE INTERVAL: 200 hrs / 800 hrs

ENGINE TYPE: Diesel engine, L6.

DISPLACEMENT: 3.0 L

INTAKE: Turbocharged, intercooled

TORQUE: 755 Nm at 2250 rpm

POWER: 250 hp at 4000 rpm

FUEL: Diesel EN 590, ASTM D 975 No.1 No.2. JIS KK2204, F54 & F75, biofuels: HVO100 and B7

WEIGHT: 25" 430 kg (947 lb), 33" 435 kg (959 lb)

ALTERNATOR OUTPUT: 180 Amp

RIG LENGTH: 25" or 33"

COOLING: Closed cooling circuit

STARTING: Electric

STEERING OPTIONS: Hydraulic, Electronic Power Steering, Joystick

SHIFT: CANbus, Electro-hydraulic

CLUTCH: Hydraulic multi-friction plate

GEAR RATIOS: 1.39:1

DIMENSIONS: (25" leg), L1150 H2090 W700 (mm)





300

OXE300

945 NM (696FT-LB) OF TORQUE


oxemarine.com

OXE300


The OXE Diesel outboards combine the reliability of an inboard with the flexibility of an outboard. A more environmentally friendly solution, the OXE Diesels offers increased serviceability, longer lifespan, lower emissions and fuel consumption. Operational range is increased by over 60%, compared to a gasoline outboard. All OXE Diesel outboards are certified in compliance with regulations set forth in EPA TIER III, IMO TIER II (MARPOL VI TIER 2), RCD, and CCS.

The OXE300 is a bi-turbo configuration that provides its full 680Nm of torque at the crankshaft already at 1750 rpm, at 1000 rpm the engine provides over 500Nm at the crankshaft. The power and high torque of the marinized diesel block by BMW in the OXE300 proves for an enduring and relentless product, applicable in diverse settings as both a workhorse and a high-speed solution, as well as revolutionary bollard pulling power.


Learn more at oxemarine.com

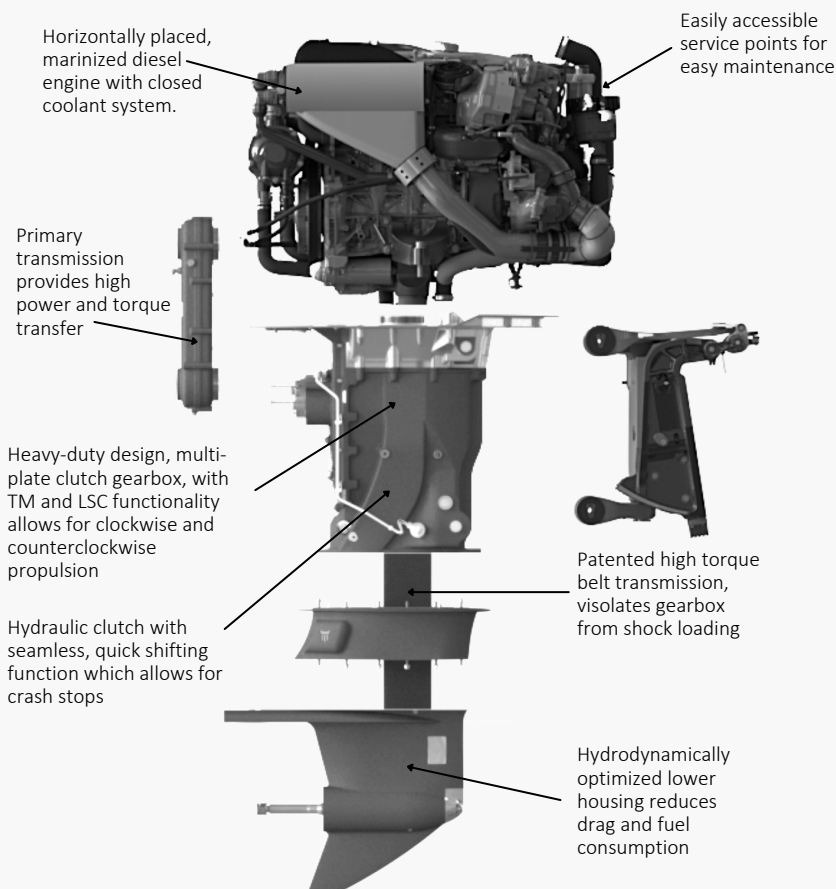

Performance

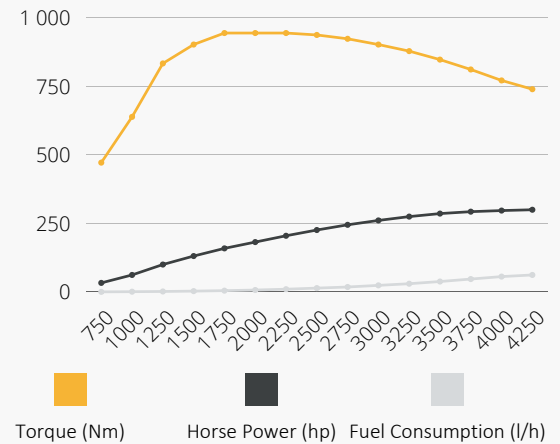

Consumption, Range and Emissions

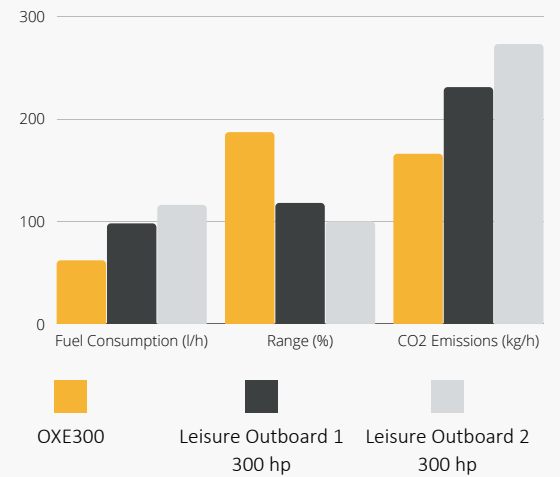

SERVICE INTERVAL: 200 hrs / 800 hrs

ENGINE TYPE: Diesel engine, L6. Block built by BMW

DISPLACEMENT: 3.0 L

INTAKE: Turbocharged, intercooled

TORQUE: 680 Nm at 1750 rpm

POWER: 300 hp at 4200 - 4400 rpm

FUEL: Diesel EN 590, ASTM D 975 No.1 No.2, JIS KK2204, F54 & F75, biofuels: HVO100 and B7

WEIGHT: 25" 430 kg (947 lb), 33" 435 kg (959 lb)

ALTERNATOR OUTPUT: 180 Amp

RIG LENGTH: 25" or 33"

COOLING: Closed cooling circuit

STARTING: Electric

STEERING OPTIONS: Hydraulic, Electronic Power Steering, Joystick

SHIFT: CANbus, Electro-hydraulic

CLUTCH: Hydraulic multi-friction plate

GEAR RATIOS: 1.39:1

DIMENSIONS: (25" leg), L1150 H2090 W700 (mm)



OXE300

945 NM (696FT-LB) OF TORQUE


oxemarine.com

OXE300


The OXE Diesel outboards combine the reliability of an inboard with the flexibility of an outboard. A more environmentally friendly solution, the OXE Diesels offers increased serviceability, longer lifespan, lower emissions and fuel consumption. Operational range is increased by over 60%, compared to a gasoline outboard. All OXE Diesel outboards are certified in compliance with regulations set forth in EPA TIER III, IMO TIER II (MARPOL VI TIER 2), RCD, and CCS.

The OXE300 is a bi-turbo configuration that provides its full 680Nm of torque at the crankshaft already at 1750 rpm, at 1000 rpm the engine provides over 500Nm at the crankshaft. The power and high torque of the marinized diesel block by BMW in the OXE300 proves for an enduring and relentless product, applicable in diverse settings as both a workhorse and a high-speed solution, as well as revolutionary bollard pulling power.


Learn more at oxemarine.com

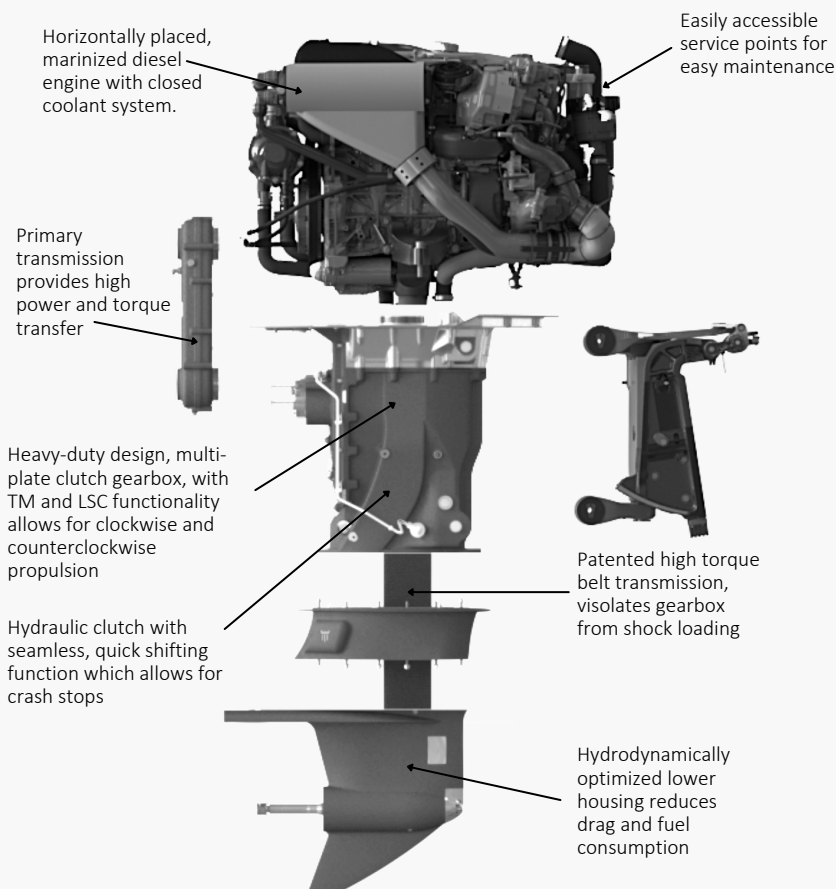

Performance

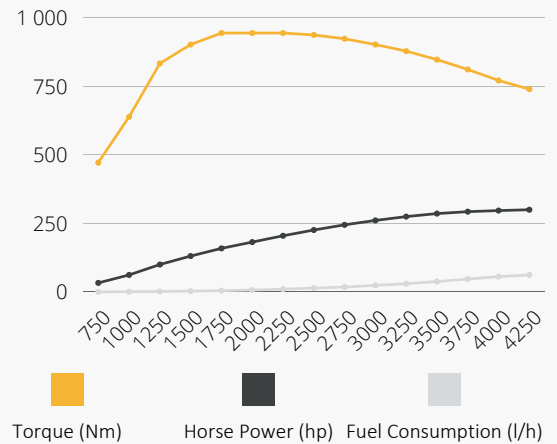

Consumption, Range and Emissions

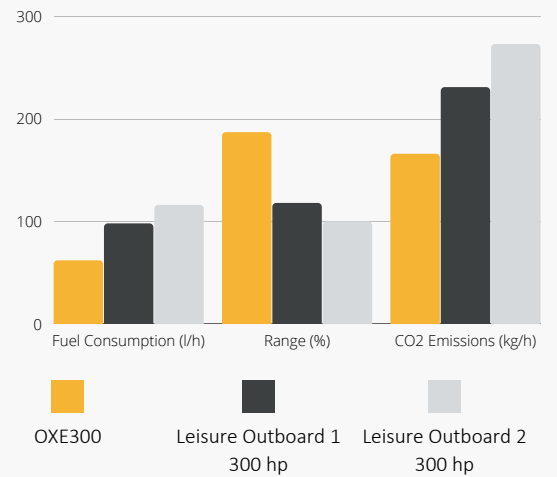

SERVICE INTERVAL: 200 hrs / 800 hrs

ENGINE TYPE: Diesel engine, L6. Block built by BMW

DISPLACEMENT: 3.0 L

INTAKE: Turbocharged, intercooled

TORQUE: 680 Nm at 1750 rpm

POWER: 300 hp at 4200 - 4400 rpm

FUEL: Diesel EN 590, ASTM D 975 No.1 No.2. JIS KK2204, F54 & F75, biofuels: HVO100 and B7

WEIGHT: 25" 430 kg (947 lb), 33" 435 kg (959 lb)

ALTERNATOR OUTPUT: 180 Amp

RIG LENGTH: 25" or 33"

COOLING: Closed cooling circuit

STARTING: Electric

STEERING OPTIONS: Hydraulic, Electronic Power Steering, Joystick

SHIFT: CANbus, Electro-hydraulic

CLUTCH: Hydraulic multi-friction plate

GEAR RATIOS: 1.39:1

DIMENSIONS: (25" leg), L1150 H2090 W700 (mm)