


# PLC series mark

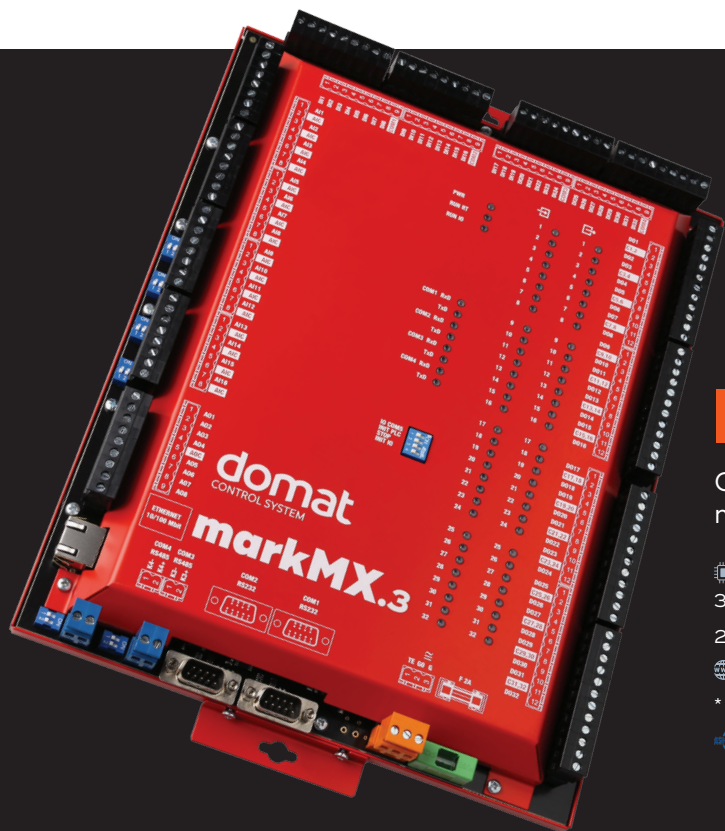

## markMX.3

Combined PLC with 88 I/O module and web server.

i.MX6 UL, OS Linux  
32 DI, 32 DO, 16 AI, 8 AO  
2x RS485 / 2x RS232 / 2x SSCP

\* markMXL including larger memory for .NET drivers

BACnet Modbus



## ICIO205.2

i.MX6 UL, OS Linux  
8 DI, 8 DO  
8 AI, 6 AO  
1x RS485 / 2x RS232 / SSCP

BACnet Modbus

## mark320LX/mark520

i.MX6 UL, OS Linux  
2x RS485 / 2x RS232 / 1x/2x SSCP  
LCD 4x20 characters, 6 buttons

\* mark520 including larger memory for .NET drivers

BACnet Modbus



## mark130.2

i.MX6 UL, OS Linux  
RS485 / RS232 / SSCP  
LCD 4x20 characters, 6 buttons, IP65

BACnet Modbus



## IMIO105.2/IMIO110.2

i.MX6 UL, OS Linux  
4 DI, 6 DO  
4 AI, 2 AO  
1x RS485 / 2x RS232 / SSCP

\* IMIO110.2 including LCD display 4x16 characters and buttons

BACnet Modbus



**DOMAT**  
MEMBER OF CEZ ESCO

*Energy under control*  
www.domat.cz



# wall

Hardware platform compatible with Domat Software

## wMXcom.2

32 DI, 32 DO

16 AI, 8 AO

2x RS485 / RS232 / RS485 / RS485

CPU Cortex A8 600 MHz  
512 MB RAM, 4096 MB FLASH, 128 kB NVRAM

## wCIOcom.2

8 DI, 8 DO

8 AI, 8 AO

2x RS485 / RS232 / RS485 / RS485

CPU Cortex A8 600 MHz  
512 MB RAM, 4096 MB FLASH, 128 kB NVRAM

Separate PLC from the set can be ordered separately under the name w750-8112.

domat  
RUNTIME

Linux

Modbus

BACnet



## w751-9301

8 DI, 4 DO, 4 AI, 2 AO

2x RS485 / RS232 / RS485 / RS485

CPU Cortex A7 650 MHz  
512 MB RAM, 4096 MB FLASH, 128 kB NVRAM

## w750-8112

2x RS485 / RS232 / RS485 / RS485

CPU Cortex A8 600 MHz  
512 MB RAM, 4096 MB FLASH, 128 kB NVRAM

All process stations have larger memory for .NET drivers.



Domat Control System s.r.o., U Panasonicu 376, 530 06 Pardubice  
T: +420 461 100 823 | WhatsApp: +420 732 806 418 | E: [produkty@domat.cz](mailto:produkty@domat.cz)

Follow Us:

