



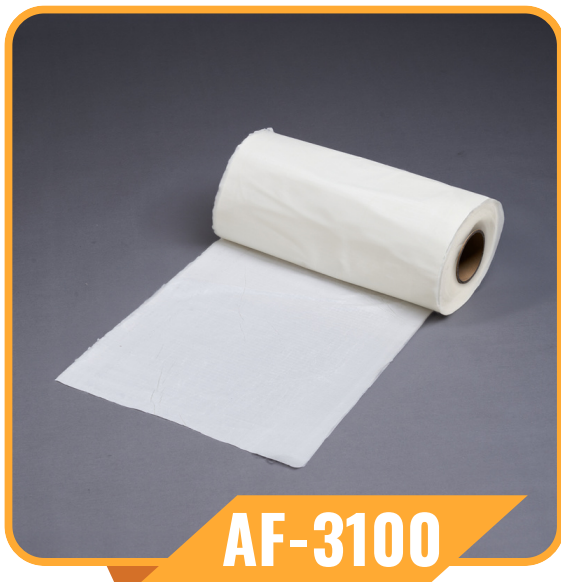

RELIABLE ELECTRICAL INSULATION



THIN & DURABLE ELECTRICAL PROTECTION

AF-3100


PRODUCT PROPERTIES:

Item	Measurement Methods	Properties	Unit
Appearance	Eyesight	Light yellow	-
Softening Point	JIS K7210-1995	215	°C
Melting Point	JIS K7210-1995	265	°C

PRODUCT SPECIFICATION:

Item	Measurement Methods	Properties	Unit
Material	-	PP(Polypropylene)	-
Weight Range	CNS 5610 L3080	13~120	gsm
Thickness	CNS 5610 L3080	0.02~2.0	mm
Width	Tape Measure	10~40	cm
Tensile Strength (50g)	Grab Method (MD/CD)	10/5.0	N/5cm
Elongation at Break	Via Tensile Test	17/16	%
Tear Strength	Trapezoid Method (MD/CD)	10/3	N
Flammability rating(0.05mm)	UL94	VTM-0	-
Defect Allowance (point count)	Acceptable number of defect point per meter	Less than 3	Point

PACKAGING & DELIVERY



SHEET



ROLL



WORLDWIDE