ESTENET


Your Privilege



www.estenet.com.tr




Life is in it, It is in life protects your farm




cost at garden and other security applications.

PRODUCTS;

- Packaging: It is packed with shrink wrapping with label which Dimension and barcode clearly specified.
- It is very suitable for Industrial Zones, Motorways, Railways and other places which are needed extra strong protection as a Separation equipment. It is brought High Quality Point of View with competitive prices.
- It is very suitable for all standard type of tightening. It is very suitable for the separation of big plots in rural areas. We recommend ESTENET products around your houses. It is very suitable for the separation equipment at the big streetsin rural areas.





	MIN	1,50	MM
WIRE DIAMETER	MAX	3,50	MM
DISTANCES BETWEEN	MIN	25,00	MM
WIDTH WIRES	MAX	150,00	MM
DISTANCES BETWEEN	MIN	25,00	MM
LENGHT WIRES	MAX	150,00	MM
TENSILE STRENGHT	MIN	750,00	Мра
TENSILE STRENGHT	MAX	950,00	Мра
HEIGHT	MIN	100,00	CM
HEIGHT	MAX	250,00	CM
SHEET'S LENGHT	MAX	250,00	СМ
COATING		ZINC	A CLASS
WIRE ROD QUALITY		SAE 1006	SAE 1008
PACKAGING		PALLET	

ZINC ROLLS


Life is in it, It is in life protects your garden




• It is produced by welding galvanized wires for the purpose of ensure both oxidation resistance and strong enclosure protection.


TYPES;

- Hot dipped galvanized before welding
- PVC coated
- PE coated
- Stainless steel
- Black drawn wire
- Bright drawn wire



MUDE DIAMETED	MIN	0,80	MM
WIRE DIAMETER	MAX	3,00	MM
DISTANCES BETWEEN	MIN	12,50	MM
WIDTH WIRES	MAX	200,00	MM
DISTANCES BETWEEN	MIN	12,50	MM
LENGHT WIRES TENSILE STRENGHT	MAX	200,00	MM
	MIN	600,00	Мра
HEIGHT	MAX	850,00	Мра
	MIN	52,00	CM
HEIGHT	MAX	302,00	CM
COIL'S LENGHT		25,00	М
COATING		ZINC	A CLASS
WIRE ROD QUALITY		SAE 1006	SAE 1008
PACKAGING		SHRINK WRAPPED-SINGLE	

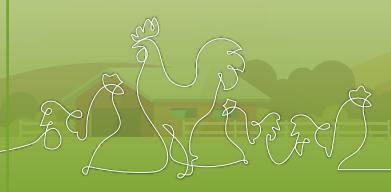

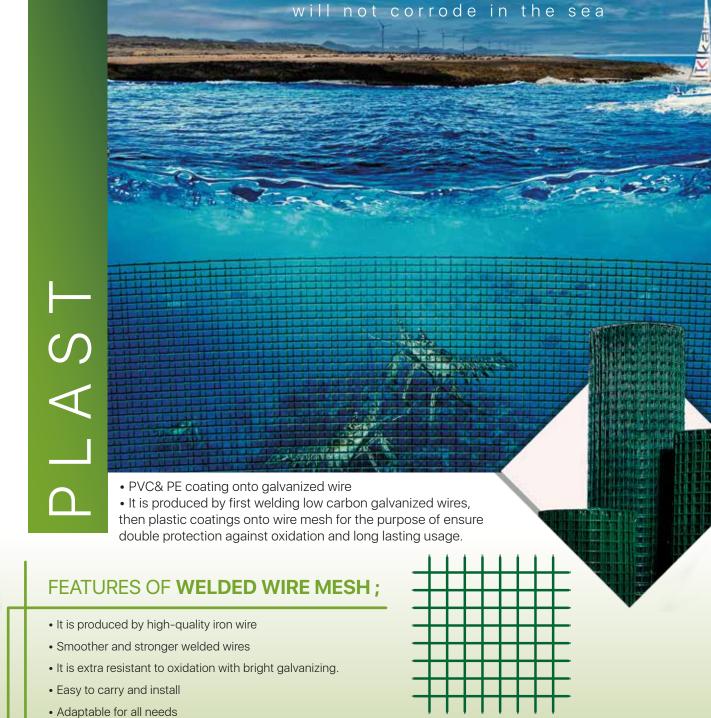

Life is in it, It is in life

MUDE DIAMETED	WIDE DIAMETED	IVIIIV	0,80	IVIIVI
WIRE	WIRE DIAMETER	MAX	3,00	MM
	DISTANCES BETWEEN	MIN	12,50	MM
	WIDTH WIRES	MAX	200,00	MM
	DISTANCES BETWEEN	MIN	12,50	MM
	LENGHT WIRES	MAX	200,00	MM
TENSIL	TENSILE STRENGHT	MIN	600,00	Мра
	TENSILE STRENOTTI	MAX	850,00	Mpa
	HEIGHT	MIN	52,00	CM
	HEIGHT	MAX	252,00	CM
	COIL'S LENGHT		25,00	M
	COATING AFTER ZINC		PVC	PE
	WIRE ROD QUALITY		SAE 1006	SAE 1008
	PACKAGING		PALLET W	ITH SHRINK




• Classic and decorative design

Pvc coating on galvanized core wireExtremely resistant to oxidation

• Wire tension curve

RNAMENTAL

Life is in it, It is in life protects your family



APPLICATIONS;

- Tree, lawn and garden arrangement
- Decorative fan arrangement
- Window and paravane door railings
- Basement and garage railings
- Animal cages and enclosures.
- Split sidelines and outpost enclosures.
- Display shelves
- Storage boxes
- Concrete reinforcement
- Garden fences
- Decorative fences



WIRE DIAMETER	MIN	1,00	MM
	MAX	3,00	MM
DISTANCES BETWEEN	MIN	50,00	MM
WIDTH WIRES	MAX	250,00	MM
DISTANCES BETWEEN	MIN	50,00	MM
LENGHT WIRES	MAX	250,00	MM
TENSILE STRENGHT	MIN	600,00	Мра
	MAX	950,00	Мра
HEIGHT	MIN	75,00	CM
	MAX	250,00	CM
COIL'S LENGHT		25,00	М
COATING AFTER ZINC		PVC	PE
WIRE ROD QUALITY		SAE 1006	SAE 1008
PACKAGING		PALLET WITH SHRINK WRAPPED-SINGLE	

