

# Easy Coax™

C4L6400-EoC

C4L6400-EoC-P (with PoE)


Long Range Ethernet over Coax IP extender



Ethernet or POE  
Over Coax IP extender

# Easy Coax™

## C4L6400-EoC / C4L6400-EoC-P Typical Application

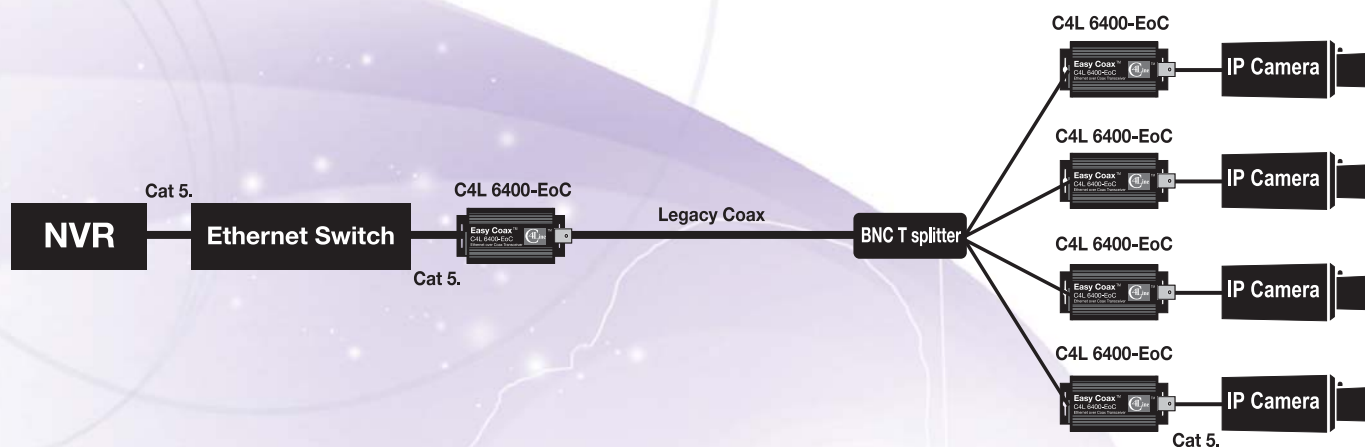

### C4L6400-EoC

#### Features

- Plug & Play Installation
- One master transceiver can support up to four slave transceivers using BNC T splitter
- Support Power over Coax (PoC) to all transceivers. (optional)
- Up to 5,000 feet(1,524m) over coax cables.
- 128bit AES encryption with key management.

#### Mechanical

- 1.57 x1.57x2.95 in. (HxWxL)
- 40x40x75 mm (HxWxL)
- Weight : 4.2oz(120g)

#### Environmental

- Operating temperature :14° F to 122° F(-10° C to +50° C)
- Storage temperature :-22° F to 158° F (-30° C to +70° C)
- Humidity 0 to 85% non-condensing Regulatory



Complies with FCC part 15B limits



RoHS

### C4L6400-EoC-P

#### Features

- Plug & Play Installation
- One master transceiver can support up to four slave transceivers using BNC T splitter
- Support 802.3 af/at PoE for IP Camera(Optional:Always on 48VDC outputs appear on pins 4&5 and 7&8)
- Support Power over Coax (PoC) to all transceivers. (optional)
- Up to 5,000 feet(1,524m) over coax cables.
- 128bit AES encryption with key management.

#### Mechanical

- 1.57 x1.57x2.95 in. (HxWxL)
- 40x40x75 mm (HxWxL)
- Weight:4.2oz(120g)

#### Environmental

- Operating temperature :14° F to 122° F(-10° C to +50° C)
- Storage temperature :-22° F to 158° F (-30° C to +70° C)
- Humidity 0 to 85% non-condensing Regulatory



Complies with FCC part 15B limits



RoHS