

Easy UTP™

C4L6400-TWP

C4L6400-TWP-P (with PoE)


Long Range Ethernet over UTP IP extender



Ethernet or PoE
Over UTP IP extender

Easy UTP™

C4L6400-TWP / C4L6400-TWP-P Typical Application

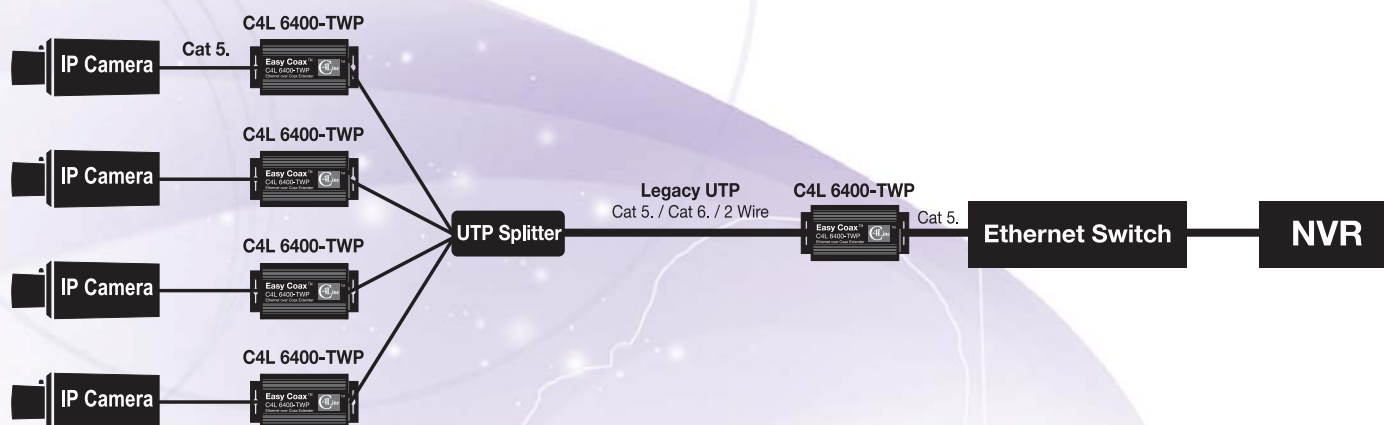

C4L6400-TWP

Features

- Plug & Play Installation
- One master transceiver can support up to four slave transceivers using UTP splitter
- Support Power over Ethernet (PoE) to all transceivers. (optional)
- Up to 1,640 feet(500m) over UTP cables.
- 128bit AES encryption with key management.

Mechanical

- 1.57 x1.57x2.95 in. (HxWxL)
- 40x40x75 mm (HxWxL)
- Weight : 4.2oz(120g)

Environmental

- Operating temperature :14°F to 122°F(-10°C to +50°C)
- Storage temperature :-22°F to 158°F (-30°C to +70°C)
- Humidity 0 to 85% non-condensing Regulatory

CE Complies with FCC part 15B limits 

C4L6400-TWP-P

Features

- Plug & Play Installation
- One master transceiver can support up to four slave transceivers using UTP splitter
- Support 802.3 af/at PoE for IP Camera(Optional:Always on 48VDC outputs appear on pins 4&5 and 7&8)
- Up to 1,640 feet(500m) over UTP cables.
- 128bit AES encryption with key management.

Mechanical

- 1.57 x1.57x2.95 in. (HxWxL)
- 40x40x75 mm (HxWxL)
- Weight:4.2oz(120g)

Environmental

- Operating temperature :14°F to 122°F(-10°C to +50°C)
- Storage temperature :-22°F to 158°F (-30°C to +70°C)
- Humidity 0 to 85% non-condensing Regulatory

CE Complies with FCC part 15B limits 