

Liquid Single-Use Bags


High-performance fluid storage and transfer bags with optimized reliability, throughput, and quality assurance for critical bioprocessing for a variety of upstream and downstream processes

Liquid single-use bags are low-profile containers engineered to bioprocess fluids. Featuring high-integrity and flow-optimized TruFLO ports, liquid single-use bags offer reliable and high-throughput performance. The industry-proven, medical-grade Renolit 9101 multilayer polyethylene film meets the requirements of ISO and USP biocompatibility tests. The film also meets low-permeability and low-temperature requirements while offering high clarity.

Liquid single-use bags are available in standard sizes from 50 mL to 20 L in 2 and 3-port options, and can be customized up to 50 L with up to 4-ports in larger chamber sizes (2 L to 50 L). Custom face-ported 2D bags are also available in 20 L, 50 L, 100 L and 200 L.

Liquid single-use bags feature a variety of BPOG-compliant standard and custom configurations

Feature	Configurations
Volume	Standard: 50 mL to 20 L Custom: up to 200 L
Port	Standard Edge: 2- or 3-port (500 mL to 50 L) Custom Edge: 4-port (2 L to 50 L) Custom Face: 3-port (20 L, 50 L, 100 L, 200 L)
Port Size	Edge: 1/8 in, 1/4 in, or 3/8 in Face: 1/4 in, 3/8 in or 1/2 in
Tubing	Standard: Thermoplastic Elastomer (TPE) Custom: Platinum-Cured Silicone (PCS)

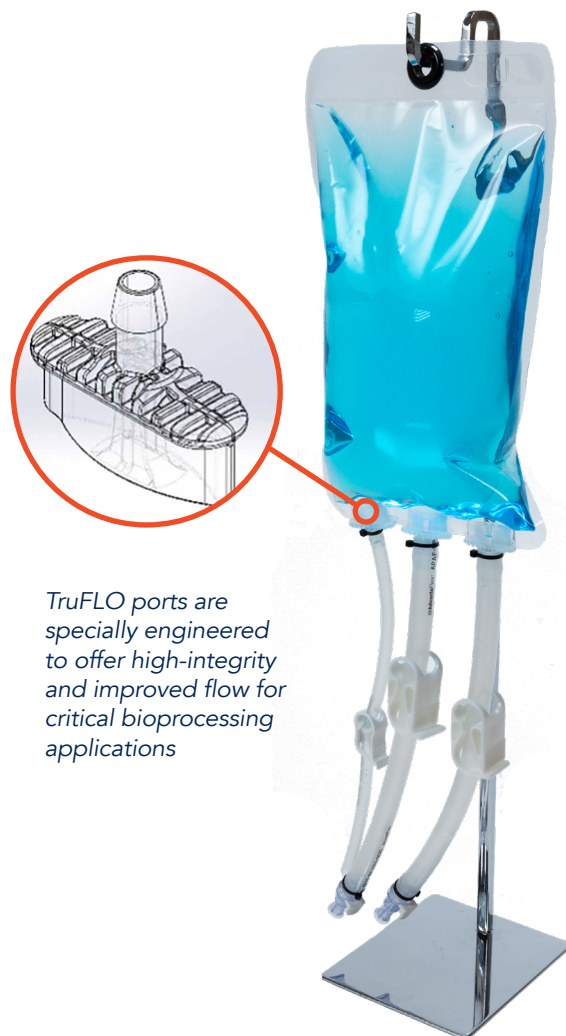

TruFLO ports are specially engineered to offer high-integrity and improved flow for critical bioprocessing applications

Benefits

- Unique TruFLO ports design facilitates optimized edge-seal integrity and improved flow rates
- Low-profile design ensures minimal product holdup to maximize product recovery
- Configurable with a wide variety of BPOG-compliant components

Typical Applications

- Buffer and cell culture media
- Bulk product collections and storage
- Chromatography and filtration buffer
- Fraction collection
- Product sampling and transport

Standard Configurations

Liquid single-use bags with TruFLO ports



2-Port Configurations

Size	Port Sizes	Dimensions (W x L)	Internal Surface Area	Connections*	Small Part #
50 mL	1/4 in	6.25 x 6.25 in	51 in ²	Luer (Body & Insert)	DF050M2PTL-G
100 mL	1/4 in	6.25 x 7.38 in	64 in ²	Luer (Body & Insert)	DF100M2PTL-G
250 mL	1/4 in	6.25 x 9.25 in	86 in ²	Luer (Body & Insert)	DF250M2PTL-G
500 mL	1/4 in	7.75 x 9.62 in	115 in ²	Luer (Body & Insert)	DF500M2PTL-G
1000 mL	1/4 in	7.75 x 12.88 in	162 in ²	Luer (Body & Insert)	DF001L2PTL-G
500 mL	3/8 in	7.75 x 9.62 in	115 in ²	MPCs (F&M)	DF500M2PTM-G
1000 mL	3/8 in	7.75 x 12.88 in	162 in ²	MPCs (F&M)	DF001L2PTM-G
2 L	3/8 in	14.00 x 15.88 in	320 in ²	MPCs (F&M)	DF002L2PTM-G
5 L	3/8 in	14.00 x 19.12 in	408 in ²	MPCs (F&M)	DF005L2PTM-G
10 L	3/8 in	16.50 x 23.62 in	610 in ²	MPCs (F&M)	DF010L2PTM-G
20 L	3/8 in	16.50 x 31.88 in	874 in ²	MPCs (F&M)	DF020L2PTM-G



3-Port Configurations

Size	Port Sizes	Dimensions (W x L)	Internal Surface Area	Connections*	Smart Part #
500 mL	3/8 in (2) & 1/4 in	7.75 x 9.62 in	115 in ²	MPCs (F&M), Injection Cap	DF500M3PTM-G
1000 mL	3/8 in (2) & 1/4 in	7.75 x 12.88 in	162 in ²	MPCs (F&M), Injection Cap	DF001L3PTM-G
2 L	3/8 in (2) & 1/4 in	14.00 x 15.88 in	320 in ²	MPCs (F&M), Injection Cap	DF002L3PTM-G
5 L	3/8 in (2) & 1/4 in	14.00 x 19.12 in	408 in ²	MPCs (F&M), Injection Cap	DF005L3PTM-G
10 L	3/8 in (2) & 1/4 in	16.50 x 23.62 in	610 in ²	MPCs (F&M), Injection Cap	DF010L3PTM-G
20 L	3/8 in (2) & 1/4 in	16.50 x 31.88 in	874 in ²	MPCs (F&M), Injection Cap	DF020L3PTM-G

* via 12-inch TPE tubing

Medical-Grade Renolit 9101 PE Film



All liquid single-use bags are manufactured with industry-proven, medical-grade Renolit 9101 film, a multilayer film composed of a high-purity biocompatible polyethylene (PE) contact layer with internal ethylene vinyl alcohol (EVOH) oxygen-barrier.

Physical Properties	
Property	Typical Value*
Film Thickness	0.325 mm
Clarity	97% (ASTM D-1003)
Tensile Strength at Break	13MPa (ASTM D-882)
Elongation at Break	350% (ASTM D-882)
Break at Cold Temperature	< -45°C (ISO 8570)
Water Vapor Transmission†	0.32 g/m²/day (ASTM F-1249)
O ₂ Permeability‡	<0.05 cm³/m²/day/bar (ASTM D-3985)
CO ₂ Permeability‡	<0.2 cm³/m²/day/bar (ASTM F-2476)


* Transmission values for film gamma-irradiated with 50 KGy.

Other are for film gamma-irradiated with 25 KGy.

† @ 23 °C, 100% RH.

‡ @ 23 °C, 0% RH.

Renolit 9101 PE Film Layers

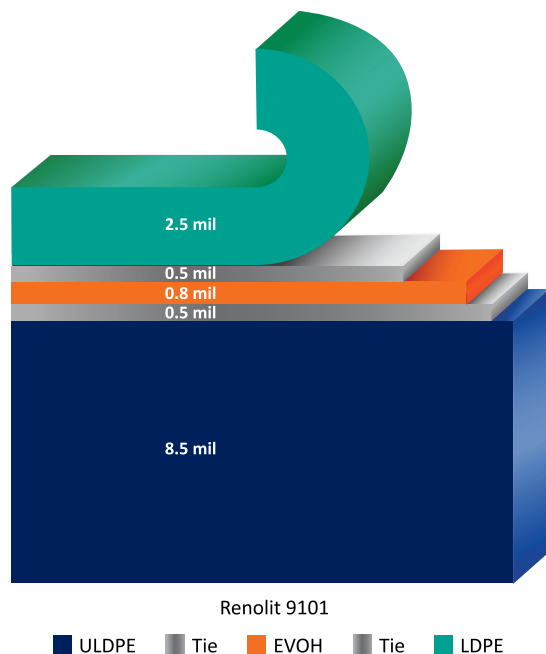

Quality, Regulatory, and Biocompatibility Properties	
Category	Property/Test*
Composition	• High-purity polyethylene (PE) and ethylene vinyl alcohol (EVOH) • Animal-Derived Ingredient (ADI) Free
Biocompatibility	• ISO 10993-4, Hemolysis • ISO 10993-5, Cytotoxicity • ISO 10993-6, Implantation • ISO 10993-10, Irritation and Sensitization • ISO 10993-11, Acute System Toxicity • USP <85>, Bacterial Endotoxins – LAL test • USP <87>, Biological Reactivity in vitro • USP <88>, Biological Reactivity in vivo, Class VI
Extractables/Leachables	• USP <661.1>, Polyethylene Physiochemical Tests, Extractable Metals, Plastic Additives • Ph. Eur. 3.1.5, Polyethylene with additives for containers for parenteral preparations and for ophthalmic preparations

Recommended Sterilization Method Gamma

* Pharmacopoeia and Biocompatibility compliance test reports available upon request


Questions or Inquiries?

More information is available at www.ilcdover.com, or by contacting us at customer_service@ilcdover.com or simply by reaching out to your dedicated ILC Dover sales representative.



BEYOND BOUNDARIES®

ILC Dover is a world-leader in the innovative design and production of engineered flexible protective solutions for pharmaceutical and biopharmaceutical, flood protection, personal protection, bulk packaging, and aerospace industries. Our customers will attest to our relentless dedication to high value products, advanced technology, and responsive service, as our visionary flexible protective solutions have improved efficiency while safeguarding people, product, and infrastructure in hazardous conditions since 1947.

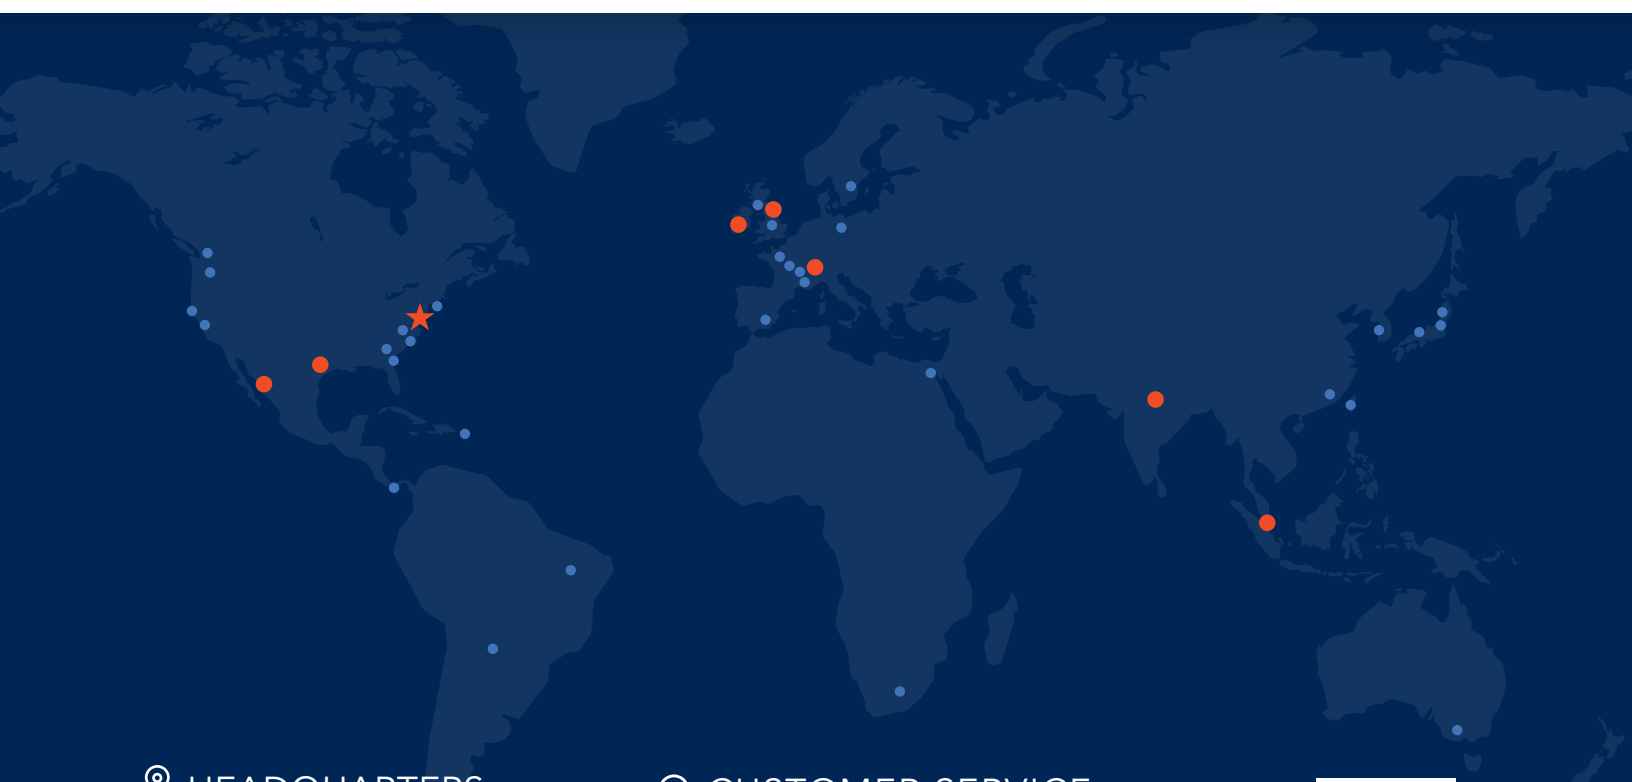

 **HEADQUARTERS**
100 Discovery Blvd, Suite 1001
Newark, DE (USA) 19713
customer_service@ilcdover.com
+1.302.335.3911 x506 - Tel
+1 302.335.1320 - Fax

 **CUSTOMER SERVICE**
+1.800.631.9567 (US Toll Free)

 **WEBSITE**
www.ilcdover.com

