




# FibriSorb



## Oil&Gas sector

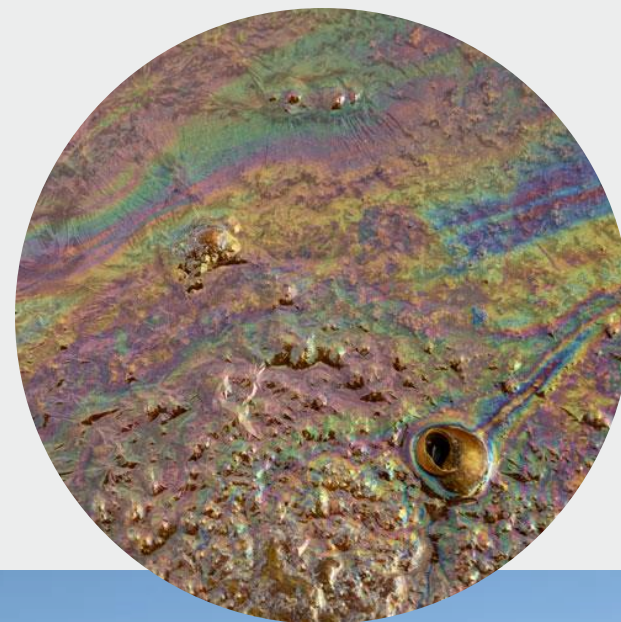

**Dedicated solution**

## Oil&Gas sector



**Dedicated solution**

# Usage examples

FibriSorb

Clean & Easy



<https://fibrisorb.com/>



|   | Product | Description              | Dimentions               |                                                                                      |
|---|---------|--------------------------|--------------------------|--------------------------------------------------------------------------------------|
| 1 | RS5/150 | Sorption sleeve<br>5x150 | 5 cm diameter<br>x150 cm |   |
| 2 | RS8/150 | Sorption sleeve<br>8x150 | 8 cm diameter<br>x150 cm |   |
| 3 | PS55/35 | Sorption pad             | 55 x 35 x 4 cm           |  |

Tabele 2. Our products

# FibriSorb Properties

**FibriSorb**

**Fast sorption of oils and petroleum derivatives:** 75% diameter in 5 min, up to 95% diameter after 50 min for oil 10W40/30°C



**High efficiency** – 1 kg FibriSorb absorbs 15 liters of oil



**Strong hydrofobic properties** – do not absorb water



**Very low product density** – 40-60kg/m<sup>3</sup>



**Mechanical stability after absorption** – no secondary leakage



**No dusting**



# Business benefits of using FibriSorb

**FibriSorb**

**Shorter employees working time**



**Decreasing utilisation cost** thanks to low mass and high efficiency  
(the cost for granular materials is +50%, and for polypropylene materials up to +15%)



**Less storage space** – up to 50% comparing with competition



**Easiness** of usage and transportation



**Ecological aspects** to highlight in ESG reporting and building the company's image



# FibriSorb – oil sorbent



<https://fibrisorb.com/>



**FibriTech Sp. z o.o.**  
Tawułkowa 27  
04-953 Warsaw  
Poland



Contact person:

**Tomasz Ciamulski**  
CEO  
E-mail: [tc@fibri.tech](mailto:tc@fibri.tech)