




**M5~H14 GRADE
PROVEN AIR FILTRATION
PERFORMANCE**

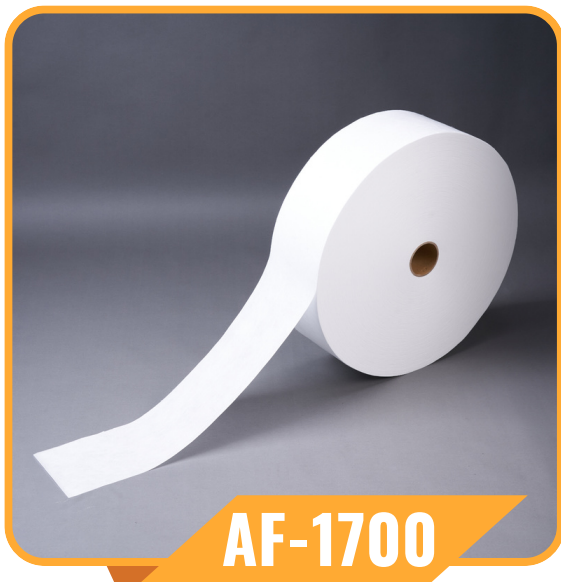

**SUSTAINED EFFICIENCY IN AIR
FILTRATION**


PRODUCT PROPERTIES:

Item	Measurement Methods	Properties	Unit
Appearance	Eyesight	White	-
Softening Point	JIS K7210-1995	154	°C
Melting Point	JIS K7210-1995	165	°C

PRODUCT SPECIFICATION:

Item	Measurement Methods	Properties	Unit
Material	-	PP(Polypropylene)	-
Weight Range	CNS 5610 L3080	10~100	gsm
Thickness	CNS 5610 L3080	0.05~2.0	mm
Width	Tape Measure	20~160	cm
Tensile Strength (30g)	Grab Method (MD/CD)	8.5/6.6	N/5cm
Elongation at Break	Via Tensile Test	33/40	%
Tear Strength	Trapezoid Method (MD/CD)	9/8	N
Pore Size (30g)	ASTM F316-03	1~15	micron
Defect Allowance (point count)	Acceptable number of defect point per meter	Less than 3	Point

PACKAGING & DELIVERY



SHEET



ROLL



WORLDWIDE