




FibriSorb



Sourcing leaks close to its source

FibriSorb

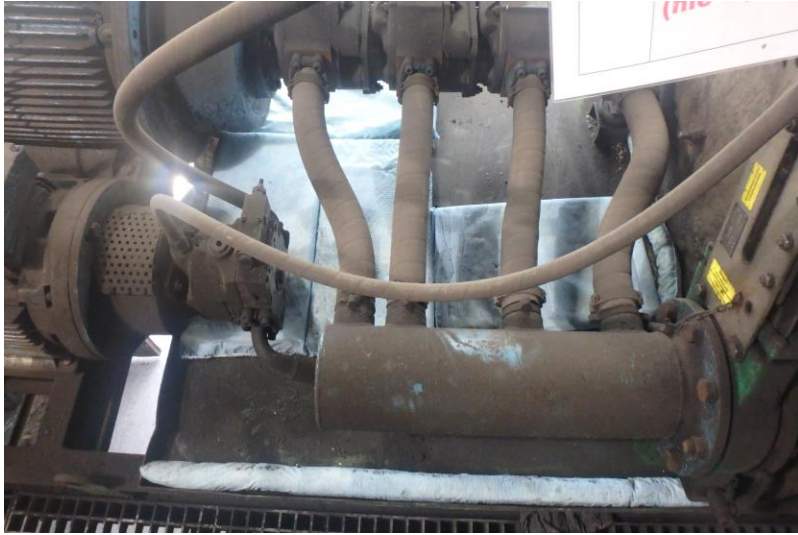

<https://fibrisorb.com/>



Dedicated solution

Usage examples

FibriSorb

Continuous leak protection



Effective containment and removal of the spill



Spill fix in hard to reach place






Clean & Easy



<https://fibrisorb.com/>



Product		Description	Dimentions	
1	RS5/150	Sorption sleeve 5x150	5 cm diameter x150 cm	
2	RS8/150	Sorption sleeve 8x150	8 cm diameter x150 cm	
3	PS55/35	Sorption pad	55 x 35 x 4 cm	

Tabele 2. Our products

FibriSorb Properties

FibriSorb

Fast sorption of oils and petroleum derivatives: 75% diameter in 5 min, up to 95% diameter after 50 min for oil 10W40/30°C



High efficiency – 1 kg FibriSorb absorbs 15 liters of oil



Strong hydrofobic properties – do not absorb water



Very low product density – 40-60kg/m³



Mechanical stability after absorption – no secondary leakage



No dusting



Business benefits of using FibriSorb

FibriSorb

Shorter employees working time



Decreasing utilisation cost thanks to low mass and high efficiency
(the cost for granular materials is +50%, and for polypropylene materials up to +15%)



Less storage space – up to 50% comparing with competition



Easiness of usage and transportation



Ecological aspects to highlight in ESG reporting and building the company's image



FibriSorb – oil sorbent



<https://fibrisorb.com/>



FibriTech Sp. z o.o.
Tawułkowa 27
04-953 Warsaw
Poland



Contact person:

Tomasz Ciamulski
CEO
E-mail: tc@fibri.tech