



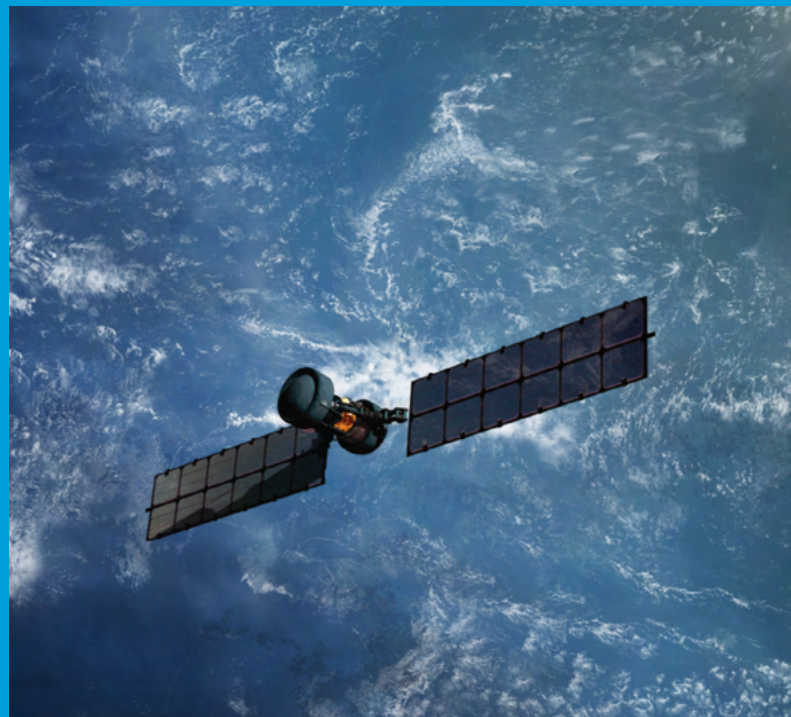

HIGH RELIABILITY, DEFENSE & SPACE APPLICATIONS


CERAMIC CAPACITORS | TANTALUM & POLYMER CAPACITORS | EMI FILTERS | THIN FILM CAPACITORS &
INDUCTORS | ESTABLISHED RELIABILITY PRODUCTS

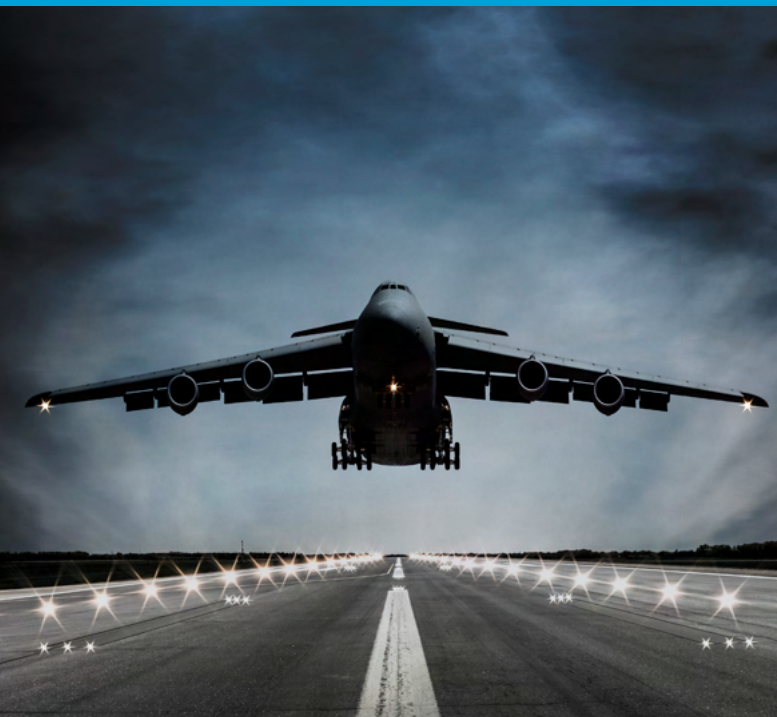

CERAMIC CAPACITORS

Surface Mount Ceramic Capacitors

NASA




- QPL BME technology available
- High CV technology enabling case size downsizing, PCB weight and size reduction
- FLEXITERM® for enhanced mechanical stress resistance available for BME
- SnPb termination for BME

Oper. Temp: -55°C to +125°C
Case: 0603 - 1812
Voltage: 16V - 100V
Capacitance: 2.2 nF - 8.2µF

NASA S-311-P-838

ESA ESCC QPL




- QPL BME and PME technologies available
- Low ESR / ESL compared to other technologies
- FLEXITERM® for enhanced mechanical stress resistance available for BME
- PdPtAg or SnPb terminations for PME, SnPb termination for BME

Oper. Temp: -55°C to +125°C
Case: 0402 - 2220
Voltage: 16V - 3KV
Capacitance: 2.2nF - 22µF

ESCC 3009 • ESA 3009034
 ESCC 3009041

MIL PRF 32535




- MIL-PRF and T-Space Levels available
- NP0 and XR7 technologies available
- Higher CV capability for PCB weight/size reduction
- Flexitem® technology for greater protection
- Termination with Sn/Pb

Oper. Temp: -55°C to +150°C
Case: 0402 - 2220
Voltage: 6V - 100V
Capacitance: 68pF - 22µF

MIL PRF 32535

CECC



- PME technology available
- NP0 and XR7 technologies available
- Terminations; Hybrid, Ni/SnPb, Ni/Sn
- Burn in options available from 0/48/96/168 hours
- Capacitance Tolerance from 1% to 20% available

Oper. Temp: -55°C to +125°C
Case: 0805 - 2220
Voltage: 25V - 500V
Capacitance: 4.7pF - 1.5µF

CECC 32101 • CECC 32100

RF / MIL / DSCC / DLA / COTS-PLUS



- DSCC 25007 Mil approved, X7R High CV Mini Stacked Capacitors, 2220 case sizes used
- Available with 100% Group A and/or with Group B for the T level requirement
- Suitable for high current, high power, & high temperature applications
- Wide range of lead frame feet, paddle (single foot), J or L style

Oper. Temp: -55°C to +125°C
Case: 01005 - 1210
Voltage: 50V - 500V
Capacitance: 0.1pF - 5100pF

MIL PRF 55681 (CDR)
 MIL PRF 123 • DSCC 06019 (0605) DSCC 06022 (1210)

Leaded Ceramic Capacitors

MIL / DSCC / DLA / BS9100



- Excellent reliability and low ESR / ESL compared to other capacitor technologies
- Radial & Axial epoxy encapsulated for harsh environment
- High voltage range 1-5kV also available

Oper. Temp: -55°C to +125°C
Case: Radial, Axial
Voltage: 50V - 5000V
Capacitance: 1pF - 2µF

MIL PRF 20 • MIL PRF 123 • MIL PRF 11015
 MIL PRF 39014 • DSCC 87046 • DSCC 87114
 DSCC 87081 • DSCC 87043 • DSCC 87047
 DSCC 87040 • DSCC 87076 • DSCC 87077
 DSCC 89044 • DSCC 87070 • BS9100

ESA ESCC / CECC



- QPL PME technologies available
- Excellent reliability and low ESR / ESL compared to other capacitor technologies
- High voltage range 1-5kV also available
- A range of lead types: Leaded Radial (Epoxy coated, Polyurethane Varnish), Straight Dual in Line, L Dual in Line

Oper. Temp: -55°C to +125°C
Case: Radial
Voltage: 50V - 5000V
Capacitance: 820pF - 180µF

ESCC 3001030
 ESCC 3001034
 CECC 30701

HIGH RELIABILITY

CAPACITORS



CERAMIC CAPACITORS CONTINUED

Switch Mode Power Supply Capacitors (SMPS)

DSCC 25007




- DSCC 25007 Mil approved, X7R High CV Mini Stacked Capacitors, 2220 case sizes used
- Available with 100% Group A and/or with Group B for the T level requirement
- Suitable for high current, high power, & high temp. applications
- Wide range of lead frame feet, paddle (single foot), J or L style

Oper. Temp: -55°C to +125°C
Case: Stacked 2220s
Voltage: 25V – 100V
Capacitance: 8.2uF – 47uF

MIL DSCC 25007

MIL / DSCC / BS9100




- Designed for programs requiring high reliability performance in harsh environment
- Suitable for high current, high power & high temperature applications
- Low ESR / ESL & excellent high frequency performance compared to other technologies

Oper. Temp: -55°C to +200°C
Case: Stacked
Voltage: 50V – 500V
Capacitance: 0.15uF – 270uF

MIL-PRF-49470 • BS9100
DSCC 87106/88011

ESA ESCC / CECC



- Designed for space based programs requiring ultra-high reliability performance
- Designed for high current, high power applications
- Low ESR / ESL and excellent high frequency performance
- A range of lead types: Lead Radial (Epoxy coated, Polyurethane Varnish), Straight Dual in Line, L Dual in Line

Oper. Temp: -55°C to +125°C
Case: Stacked, Radial
Voltage: 50V – 5000V
Capacitance: 820pF – 180uF

ESCC 3001030 • ESCC 3001034 CECC 30701

ESCC 3012 (in preparation)

TANTALUM & POLYMER CAPACITORS

Surface Mount Tantalum & Polymer

MIL / DSCC / DLA / SRC / COTS-PLUS



- TAZ (CWR), TBJ, TBM, TCS, TCP, TCB Series
- Available with MnO₂ or polymer cathode in SMD chip case size
- Polymer offers low ESR & higher inrush current robustness
- MnO₂ chips & multianodes offer excellent reliability & are qualified to the highest MIL/Space reliability levels

Oper. Temp: -55°C to +125°C
Case: SMD
Voltage: 2V – 50V
Capacitance: 0.1uF – 1500uF

MIL-PRF-55365 (CWR) • MIL PRF 55365 (T Level) • SRC9000 DSCC 07016 • DSCC 95158 • DSCC 09009 • COTS-Plus

ESA ESCC / CECC




- TES, TAJ, TAJ ESCC, TSC ESCC
- Long term stability, high capacitance in small case sizes
- Manufactured in EU, ESA qualified plant
- Available with MnO₂ or polymer cathode in SMD chip case size

Oper. Temp: -55°C to +105/+125°C
Case: 3216 – 7343
Voltage: 4V – 50V
Capacitance: 0.1uF – 680uF

ESCC 3012/004 • ESCC 3012/001 • ESCC 3012/006 • CECC 30801-011 • CECC 30801-005

MIL / SRC / COTS-PLUS



- TBC (CWR) microchip
- Available in standard MnO₂ SMD chip with case sizes down to 0603
- MnO₂ chips offer excellent reliability and parameters stability over temperature, voltage, and time
- Qualified to the highest MIL/Space reliability levels

Oper. Temp: -55°C to +125°C
Case: 0603, 0805, 1206
Voltage: 4V – 25V
Capacitance: 0.33uF – 68uF

COTS-Plus • SRC9000 • MIL-PRF-55365/12 (CRW)

COTS-PLUS / SPACE

Stacking Options (see TCHS)



- TCH Low ESR Hermetic Series
- Designed for Aerospace & Hi-Rel applications
- NASA EEE-INST-002, Level 2 screening for selected codes
- Excellent stability under humidity and ambient conditions due to ceramic case hermetic packaging
- Effective up-screen testing for high reliability

Oper. Temp: -55°C to +125°C
Case: (CTC-21D)
Voltage: 10V – 100V
Capacitance: 22uF – 330uF

ESCC 3012 (in preparation)

HIGH RELIABILITY CAPACITORS



TANTALUM & POLYMER CAPACITORS CONTINUED

Wet Tantalum Capacitors

SRW / MIL / DSCC / DLA / COTS-PLUS



- TWA, TWA-X, TWA-Y, TWC, TWC-Y, TWM, TWD, TWS
- Includes a welded tantalum can & header assembly that provides a hermetic seal to withstand harsh shock & vibration requirements
- Customized capacitance & voltage ratings are possible
- TWC-Y and TWA-Y capable of continuous operation at 200°C, TWA-X 230°C

Oper. Temp: -55°C to +200/230°C
Case: T1,T2,T3,T4, TWM module
Voltage: 3V – 125V
Capacitance: 2.5µF – 100µF

DSCC 93026 • DSCC13017 • SRW9000 •
MIL-PRF-39006 • COTS-Plus

THIN FILM PRODUCTS

RF Surface Mount Ceramic Capacitors

DLA




- Ultra tight capacitance tolerances
- Low ESR at VHF, UHF and microwave frequencies
- Enhanced RF power handling capability
- High stability with respect to time, temperature, frequency and voltage variation

Oper. Temp: -55°C to +125°C
Case: 0402 – 1210
Capacitance: 0.05 pF – 68 pF
Tolerances: from ±0.01 pF

DLA 09024 (0402)
DLA 09025 (0603)
DLA 09026 (0805)
DLA 09027 (1210)

RF Surface Mount Ceramic Capacitors

DLA



- High Q
- RF Power Capability
- High SRF
- Low DC Resistance
- Ultra-Tight Tolerance

Oper. Temp: -55°C to +125°C
Case: 0402 – 0805
Inductance: 0.56nH – 22nH
Tolerances: from ±0.05nH

DLA 11017 (0402)
DLA 11018 (0603)
DLA 11019 (0805)

EMI FILTERS

MIL




- High temp construction withstands 300°C installation temps
- Rugged monolithic discoidal MIL-C-31033 construction
- Glass hermetic seal on one end with epoxy seal on the opposite end

Oper. Temp: -55°C to +125°C
Case: Axial
Voltage: 25V to 400V
Capacitance: 10pF - 1.2nF

MIL-PRF-28861 • MIL-PRF-31033
MIL-STD-202

ESTABLISHED RELIABILITY PRODUCTS

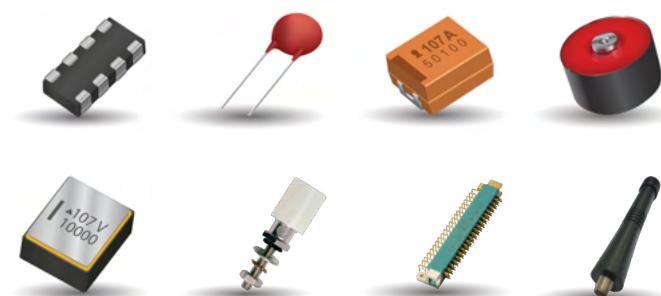

Tantalum Capacitors
• THH 230°C Hermetically Sealed
• Niobium Oxide

Antennas
• Omni-direction Transceiver Antennas

Multilayer Varistors
• DSCC AA555682 (Industrial Grade)

NTC Thermistors
• SMT and Leaded

Film Capacitors
• High Power
• Medium Power
• DC Film

Varicon • Rack and Panel
• MIL-E-5400, MIL-E-8189,
• MIL-T-21200,
• MIL-C-21097, MIL-C-28731,
• MIL-C-55302 Compliant

Leo Space Oscillators
• OCXO
• GPSDO
• TCXO

ABOUT KYOCERA AVX



High Reliability Products for Demanding Applications

KYOCERA AVX Corporation is a leading supplier of advanced components and interconnect solutions, offering the world's broadest selection of passive components and connectors.

The company has over 30 years experience in producing industry-leading, high-reliability passive components, offering an expanding range of products for defense, aerospace, space, and other high reliability industries.



KYOCERA AVX currently has 11 factories in Europe and USA qualified to AS9100, IECQ-CECC, TS16949-2009 and ISO 9001-2008 standards. The company also has a number of products qualified to COTS+, ESCC, SRC, MIL and DSCC drawings, as well as optional custom screening and test service capabilities.

As a technology leader, KYOCERA AVX will continue to add to its product portfolio on a regular basis. Details of new devices being offered and their specifications will be shown on the KYOCERA AVX website.

HIGH RELIABILITY PRODUCTS

MIL-PRF & T-Space Level	SMD Ceramic Capacitors • Leaded Ceramic Capacitors • SMPS Capacitors • SMD Tantalum • EMI Filters Wet Tantalum Capacitors
DSCC/DLA	SMD Ceramic Capacitors • Leaded Ceramic Capacitors • SMPS Capacitors • Wet Tantalum Capacitors Leaded Ceramic Capacitors Array (SIP) • SMD Tantalum • Thin Film Capacitors and Inductors
SRC9000 Space Level	SMD Tantalum
SRW9000 Space Level	Wet Tantalum Capacitors
NASA	SMD Ceramic Capacitors
ESA/ESCC	SMD Ceramic Capacitors • Leaded Ceramic Capacitors • SMPS Capacitors • SMD Tantalum • Polymer
CECC	SMD Ceramic Capacitors • Leaded Ceramic Capacitors • SMD Tantalum • Tantalum Leaded
COTS-Plus	SMD Ceramic Capacitors • Wet Tantalum Capacitors • SMD Tantalum • SMD Polymer • TCH Hermetically Sealed Polymer
BS9100	Leaded Ceramic Capacitors • SMPS Capacitors • Wet Tantalum Capacitors • SMD Tantalum

HIGH RELIABILITY

APPLICATIONS & TEST CAPABILITIES



HIGH RELIABILITY APPLICATIONS

These products have been designed for the most demanding applications, such as space, aerospace, defense industry, and other high reliability programs.

AVIONICS

- FADEC
- Lighting
- Control Surfaces
- UAV
- Instrumentation/Comms
- Guidance
- Sensor (FLIR, SARS)
- Engine Controls
- Flap and Brake Controls
- Transducer
- Jet Ignition
- Radar Antenna Arrays
- Power Supplies

SPACE/SATELLITE

- GEO / LEO
- GPS / DGPS
- Scientific
- Telemetry
- Launch Vehicle
- Exploration
- Rovers
- Communication
- Power Supplies

DEFENSE

- Air / Sea / Land / Space
- Munitions
- Radars
- Communication
- JTRS
- SINCGARS
- Surveillance
- Navigation
- Night Vision
- Target Acquisition
- Countermeasures
- Sonars

HIGH RELIABILITY TESTING CAPABILITY

As a matter of course, KYOCERA AVX maintains a level of quality control that is sufficient to guarantee whatever reliability specifications are needed. However, KYOCERA AVX goes further and in addition to testing the components to the defined high reliability standards, KYOCERA AVX also has the capability to perform a wide range of custom-specific testing. The abbreviated list indicates the breadth and thoroughness of available quality control services at KYOCERA AVX.

For further specific test capabilities or details, please contact KYOCERA AVX.

- DPA
- X-Ray Analysis
- Ultrasonic Scan
- Termination Pull Testing
- Terminal Strength
- Solderability
- Thermal Shock
- Load/Humidity Life Testing
- Moisture Sensitivity
- Temperature Cycling
- Failure Analysis
- First Article Verification
- Sorting and Matching to Spec. Limits
- Bondability Testing
- Immersion Cycling
- Voltage Conditioning
- Pre-encapsulation Inspection
- Shock and Vibration
- RF Characterization
- Weibull Testing
- Lot Validation Testing
- Burn-in
- Group A/B/C
- LAT 1/2/3

NORTH AMERICA
Tel: +1-864-967-2150

CENTRAL AMERICA
Tel: +55-11-46881960

EUROPE
Tel: +44-1276-697000

ASEAN / INDIA / TAIWAN
Tel: +65-6271-0500

CHINA
Tel: +86-21-5877-5366 *511

JAPAN
Tel: +81-75-604-3640

KOREA
Tel: +82-2-3463-3538

▶ WWW.KYOCERA-AVX.COM



101525