SOTA i1 EL BANDIDO™

RAPID COOK OVEN WITH PANINI PRESS

TURBOCHEF




PERFORMANCE

Using patented technology, the TurboChef Sota i1 El Bandido is the first rapid cook oven that can operate as a high-speed/ high-quality panini press with the flexibility to also cook non-pressed foods. The panini press is externally actuated so the operator can choose to press a product.

VENTILATION

- UL (KNLZ) listed for ventless operation.†
- EPA 202 test (8 hr):
  - Product: Pepperoni Pizza
    Results: 1.05 mg/m^3
  - Product: Sandwiches
    Results: 1.91 mg/m^3
    Ventless Requirement: <5.00 mg/m^3
- Internal catalytic filtration to limit smoke, grease, and odor emissions.

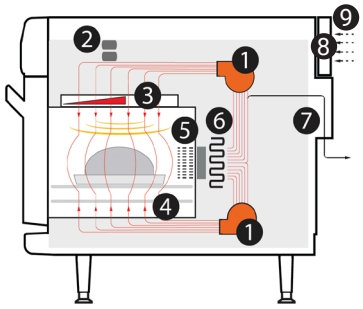

1. Blower Motors
2. Microwave System
3. Stirred Impinged Air (Top) and Microwave
4. Impinged Air (Bottom)
5. Catalytic Converter
6. Impingement Heater
7. Vent Tube Catalyst
8. Air Filter
9. Inlet Air for Cooling Electronic Components

EXTERIOR CONSTRUCTION

- High-temperature, powder coated, corrosion-resistant steel outer wrap and door
- Cool-to-touch exterior; all surfaces below 50°C
- 4-inch adjustable legs
- Capacitive One-Touch screen with tempered glass cover

INTERIOR CONSTRUCTION

- 201/304 stainless steel
- Fully welded and insulated cook chamber
- Fully removable panini press mechanism

FEATURES

- Panini press mechanism with anodized aluminum upper and lower griddle press plates
- Independently-controlled dual motors for vertically-recirculated air impingement
- Top launched microwave system
- Stirrer to help ensure even distribution of air and microwave
- Intuitive One-Touch interface with customizable images
- Unlimited recipe storage
- Easily create and manage menus with the cloud-based Menu Builder by Open Kitchen
- Ventless operation powered by a UL (KNLZ) listed catalytic converter system
- External cooling air filtration
- Vent catalyst to further limit emissions and odors
- USB compatible
- Single or dual-temperature interface
- Self-diagnostics for monitoring oven components and performance
- Smart voltage sensor technology* (U.S. only)
- Includes plug and cord (6 ft. nominal)
- Warranty includes 1-year parts and labor
- Open Kitchen from Powerhouse Dynamics connects your equipment to the cloud, offering real time, automated monitoring, predictive maintenance, over-the-air updates, and operational insights. Visit powerhousedynamics.com for more information.

STANDARD INCLUDED ACCESSORIES

- Oven Cleaner Starter Kit, PN: 105702 (Qty 1)
- Cooking Basket, PN: i1-9166 (Qty 1)
- Aluminum Paddle, PN: i1-9716 (Qty 1)
- Air Filter, PN: HHD-8422 (Qty 1)

PROUD US MANUFACTURERS

This product conforms to the ventilation recommendations set forth by NFPA96 using EPA202 test method.

*Smart Voltage Sensor Technology does not compensate for lack of or over voltage situations. It is the responsibility of the owner to supply voltage to the unit according to the specifications on the back of this sheet.


† Ventless certification is for all food items except for foods classified as "fatty raw proteins." Such foods include raw bone-in, skin-on chicken, raw hamburger meat, raw bacon, raw sausage, raw steaks, etc. If cooking these types of foods, consult local HVAC codes and authorities to ensure compliance with ventilation requirements.

Ultimate ventless allowance is dependent upon AHJ approval, as some jurisdictions may not recognize the UL certification or application. If you have questions regarding ventless certifications or local codes please call 1-800-908-8726.

TurboChef reserves the right to make substitutions of components or change specifications without prior notice.

DOC-1722 / Rev K / October 2025

2801 Trade Center Drive, Carrollton, TX 75007
+1 214-379-6000 (Worldwide) | 1-800-908-8726 (US & Canada) | turbochef.com

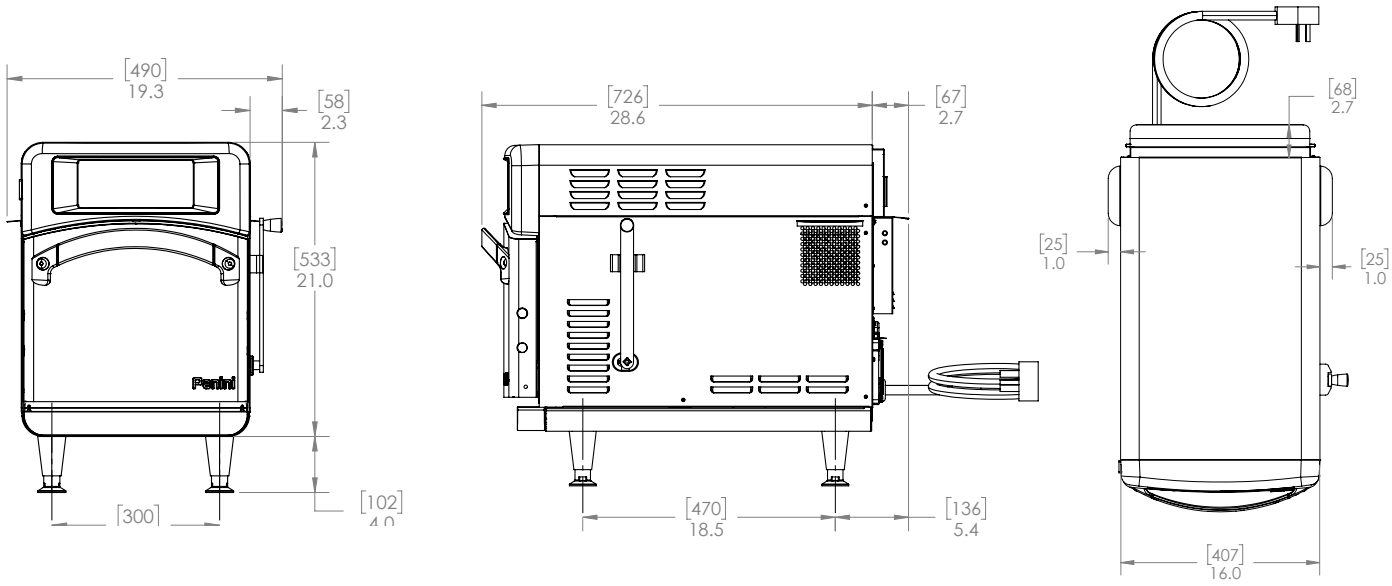

DIMENSIONS		
Height	25.0”	635 mm
Width	19.3”	490 mm
Depth	31.3”	795 mm
Weight	177 lb.	80 kg
Cook Chamber Dimensions		
Height	7.2”	183 mm
Width	12.5”	318 mm
Depth	10.5”	267 mm
Volume	0.54 cu.ft.	15.4 L
Wall Clearance (Oven not intended for built-in installation)		
Top	5”	127 mm
Side without Handle	2”	51 mm
Side with Handle	6”	152 mm
Back	2”	51 mm

- US, CAN, LA (NEMA 6-30P)
- UK, BK (IEC 309, 3-pin)
- JK (NEMA L6-30, PSE, 3-blade)
- JD (NEMA L15-30, PSE, 4-blade)
- ED, BD, SD (IEC 309, 4-pin)
- EW, KW (IEC 309, 5-pin)
- AU (Clipsal, 5-pin)

ELECTRICAL SPECIFICATIONS – SINGLE PHASE		
US/Canada	Black: i1-9500-938 Red: i1-9500-921	208/240 VAC, 60 Hz, 30 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Europe (UK)	i1-9500-939-UK	230 VAC, 50 Hz, 27 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Brazil (BK)	i1-9500-943-BK	220 VAC, 60 Hz, 28 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Latin America (LA)	i1-9500-944-LA	220 VAC, 60 Hz, 28 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan (JK)	i1-9500-945-JK	200 VAC, 50 Hz, 30 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan (JK)	i1-9500-947-JK	200 VAC, 60 Hz, 30 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
ELECTRICAL SPECIFICATIONS – MULTI PHASE		
Europe Delta (ED)	i1-9500-540-ED	230 VAC, 50 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Europe Wye (EW)	i1-9500-941-EW	400 VAC, 50 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Australia Wye (AU)	i1-9500-942-AU	400 VAC, 50 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan Delta (JD)	i1-9500-946-JD	200 VAC, 50 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan Delta (JD)	i1-9500-948-JD	200 VAC, 60 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Korea/Middle East Wye (KW)	i1-9500-949-KW	400 VAC, 60 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Korea/Middle East Delta (SD)	i1-9500-950-SD	230 VAC, 60 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW

DOC-1722 / Rev K / October 2025

2801 Trade Center Drive, Carrollton, TX 75007
+1 214-379-6000 (Worldwide) | 1-800-908-8726 (US & Canada) | turbochef.com

ELECTRICAL SPECIFICATIONS – MULTI PHASE		
Europe Delta (ED)	i1-9500-540-ED	230 VAC, 50 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Europe Wye (EW)	i1-9500-941-EW	400 VAC, 50 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Australia Wye (AU)	i1-9500-942-AU	400 VAC, 50 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan Delta (JD)	i1-9500-946-JD	200 VAC, 50 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Japan Delta (JD)	i1-9500-948-JD	200 VAC, 60 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Korea/Middle East Wye (KW)	i1-9500-949-KW	400 VAC, 60 Hz, 16 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW
Korea/Middle East Delta (SD)	i1-9500-950-SD	220 VAC, 60 Hz, 20 amps Max Input: 6.2 kW, MW: 3.2 kW, HTR: 6.0 kW

*Under normal operation, the oven will not exceed the max input value.

⚠ **TurboChef recommends installing a type D circuit breaker for European installations.**

⚠ **IMPORTANT:** If the oven is placed near a grill or stove, a divider must exist between the oven and the open heat source, with a minimum of 6" (153 mm) between the oven and the divider. If the oven is placed near a fryer, a divider must exist between the oven and fryer, with a minimum of 12" (305 mm) between the oven and the divider.

SHIPPING INFORMATION

U.S.: All ovens shipped within the U.S. are packaged in a double-wall corrugated box banded to a wooden skid.

International: All ovens shipped by air or less than container load are packaged in wooden crates. Crates are charged at an additional cost.

International LCL: Crates are optional (recommended) at additional cost.

Box size: 37" x 24" x 34" (940 mm × 610 mm × 864 mm)
Crate size: 37" x 25" x 34" (940 mm × 635 mm × 864 mm)

Item Class: 92.5

Approximate boxed weight: 210 lb. (95 kg)
Approximate crated weight: 240 lb. (109 kg)

Minimum Entry Clearance Required for Box: 34" (864 mm)
Minimum Entry Clearance Required for Crate: 34" (864 mm)

2801 Trade Center Drive, Carrollton, TX 75007
+1 214-379-6000 (Worldwide) | 1-800-908-8726 (US & Canada) | turbochef.com