TERRY H2O SOLUTIONS

TFF
Terry Fast Fit Series

TFF-CP15-3

P/N:57513001




Applications


- Ice - Cubers up to 2000 lbs. Flakers up to 2,400 lbs.
- Steam - Multi-compartment Steamer or combiovens

Features

- High quality activated carbon to greatly reduce corrosion, bad tastes and odors
- Parallel plumbed system to increase flowrate
- Reduces costly equipment maintenance
- Inhibits hard water scale
- Full port shut off valve
- Pressure line gauge

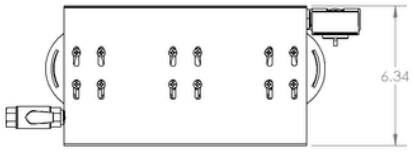

Top View

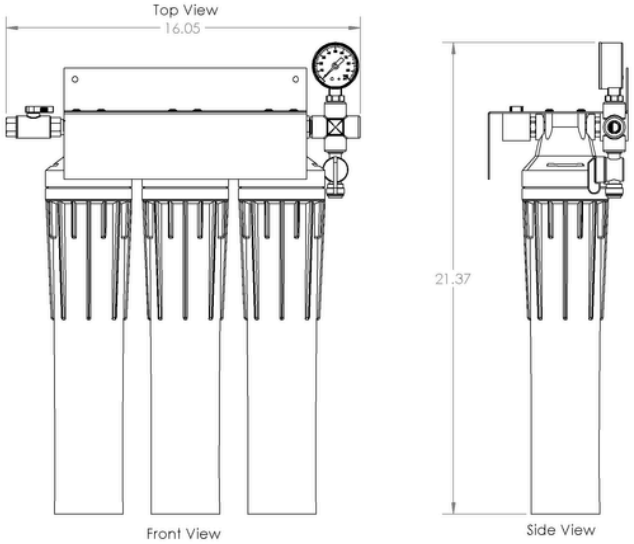

Front View

Side View

Specifications

Product Dimensions	21.5” X 16" X 6.5”
Connection	3/8” FNPT
Max. PSI	125
Max Temp.	100 °F
Flow Rate	6 GPM
Sediment Reduction	1 micron
Product Weight	12 lbs.

ANSI/NSF International Standards
Model FF-CP15 cartridge tested and certified by NSF International against ANSI/NSF Standard 53 for health effects.

For more information:
Phone: 800-852-4221
Email: support@terryh2o.com