


## Fișă tehnică | Număr articol: 870-440

Push-in type jumper bar; insulated; from 1 to 10; Nominal current 18 A; light gray

[www.wago.com/870-440](http://www.wago.com/870-440)

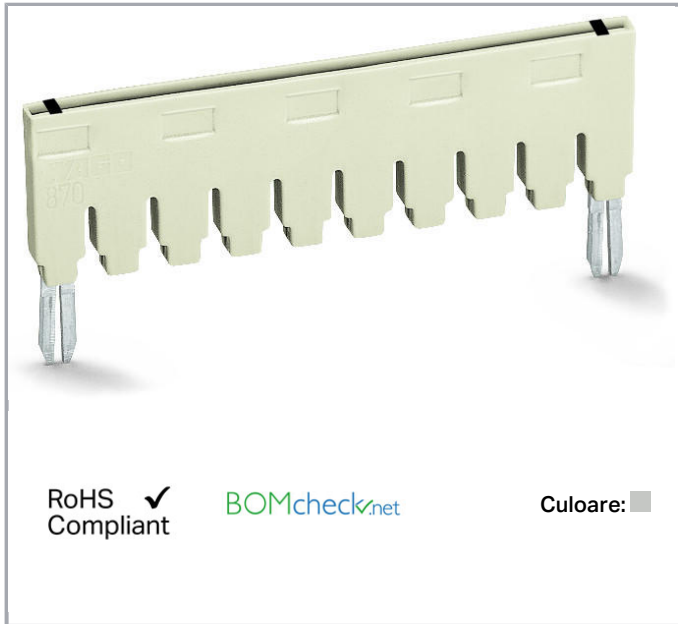

### Date

#### Electrical data

#### Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

#### Approvals Ex

Rated current (Ex e II)	13,5 A
-------------------------	--------

#### Geometrical Data

Width	49 mm / 1.929 inch
Depth	2.5 mm / 0.098 inch

#### Material Data

Color	light gray
Fire load	0,047 MJ

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



## Commercial data

Packaging type BOX

---

## Counterpart

### Descărcări Documentation

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 2,1 MB	Descărcare
------------------------	-------------	---------------	------------

---

## CAD/CAE-Data

### CAD data

2D/3D Models 870-440	URL	Descărcare
----------------------	-----	------------

---

### CAE data


WSCAD Universe 870-440	URL	Descărcare
------------------------	-----	------------

---

## Installation Notes

Jumpered

Supus modificărilor.

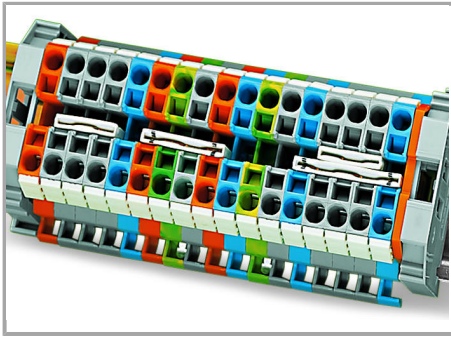

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or  
1 – – 4 – – 7

upon request

Supus modificărilor.