



## Date

### Electrical data

### Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) ≙ Overvoltage category III / Pollution degree 2

### Approvals per UL 1059

Approvals per

UL 1059

### Connection data

Number of connection types

1

Jumper assignment

2-way

Supus modificărilor.



## Geometrical Data

|             |                     |
|-------------|---------------------|
| Pin spacing | 7.5 mm / 0.295 inch |
|-------------|---------------------|

## Mechanical data

|          |                                    |
|----------|------------------------------------|
| Suitable | for 745 Series – 4 mm <sup>2</sup> |
|----------|------------------------------------|

## Material Data

|                  |              |
|------------------|--------------|
| Contact material | Copper alloy |
| Contact plating  | tin-plated   |
| Weight           | 0,8 g        |

## Commercial data

|                       |                     |
|-----------------------|---------------------|
| Product Group         | 4 (Printed Circuit) |
| Packaging type        | BOX                 |
| Country of origin     | CH                  |
| GTIN                  | 4044918303347       |
| Customs tariff number | 85366990990         |

## Counterpart

### Descărcări

#### Documentation

##### Additional Information


|                        |             |               |            |
|------------------------|-------------|---------------|------------|
| Technical explanations | Apr 3, 2019 | pdf<br>3,6 MB | Descărcare |
|------------------------|-------------|---------------|------------|

## Installation Notes


Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
/Representative Office Romania  
Sos. Pipera-Tunari nr. 1/1  
building 1, 2nd floor | 077190 Voluntari, Ilfov  
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com


Aveți întrebări despre produsele noastre?  
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

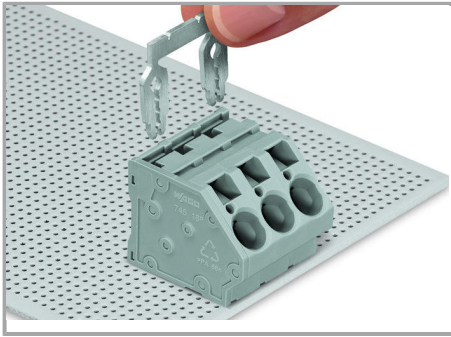

Inserting a comb-style jumper bar.

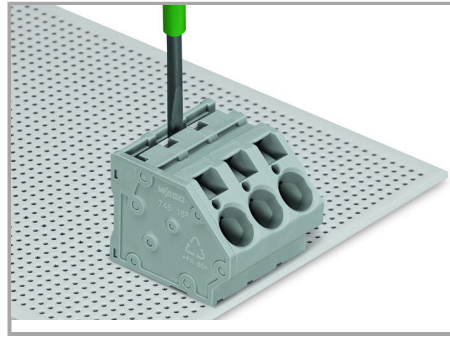

To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

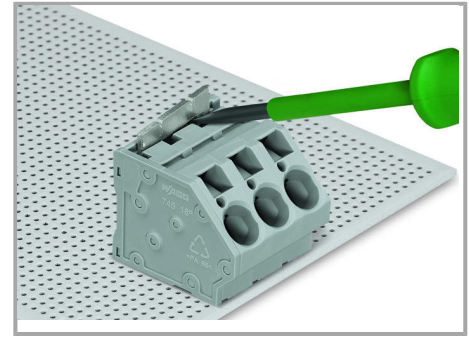

To remove the comb-style jumper bar, lift it up using a screwdriver – 745 Series.

Supus modificărilor.