



## Date

### Electrical data

### Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2)  $\hat{=}$  Overvoltage category III / Pollution degree 2

### Approvals per UL 1059

Approvals per

UL 1059

### Connection data

Number of connection types

1

Jumper assignment

4-way

### Geometrical Data

Pin spacing

10 mm / 0.394 inch

Supus modificărilor.



## Mechanical data

Suitable

for 745 Series 745 – 16 mm<sup>2</sup> and 2706 Series

## Material Data

Contact material

Copper alloy

Contact plating

tin-plated

Weight

7,8 g

## Commercial data

Product Group

4 (Printed Circuit)

Packaging type

BOX

Country of origin

CH

GTIN

4044918303507

Customs tariff number

85366990990

## Counterpart

### Descărcări

#### Documentation

##### Additional Information

Technical explanations

Apr 3, 2019

pdf  
3,6 MB

Descărcare

## CAD/CAE-Data

### CAD data


2D/3D Models 745-584

URL


Descărcare

## Installation Notes


Supus modificărilor.

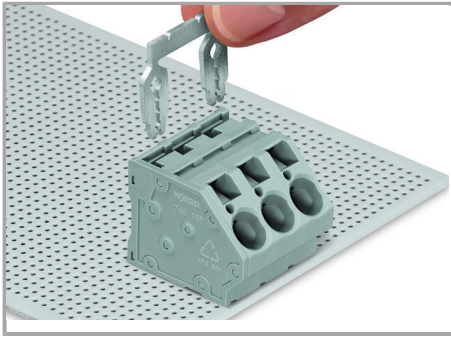

Inserting a comb-style jumper bar.

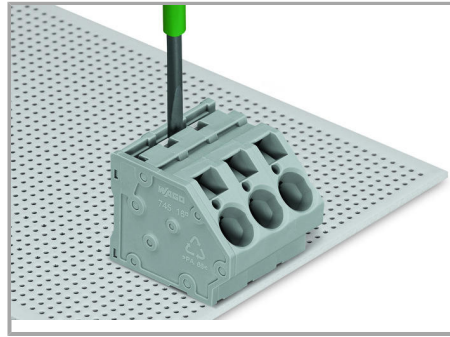

To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

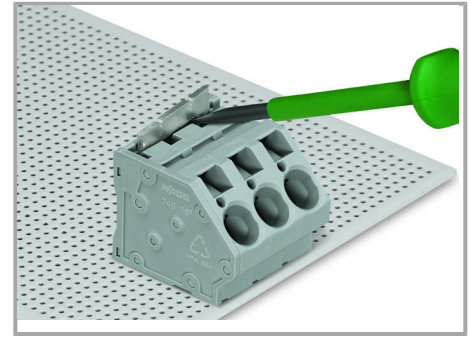

To remove the comb-style jumper bar, lift it up using a screwdriver – 745 Series.

Supus modificărilor.