



Date

Electrical data

Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Approvals per

UL 1059

Connection data

Number of connection types

1

Jumper assignment

5-way

Geometrical Data

Pin spacing

15 mm / 0.591 inch

Supus modificărilor.



Mechanical data

Suitable

for 745 Series 745 – 16 mm² and 2706 Series

Material Data

Contact material

Copper alloy

Contact plating

tin-plated

Weight

11,1 g

Commercial data

Product Group

4 (Printed Circuit)

Packaging type

BOX

Country of origin

CH

GTIN

4017332810647

Customs tariff number

85366990990

Counterpart

Descărcări

Documentation

Additional Information

Technical explanations

Apr 3, 2019

pdf
3,6 MB

Descărcare

CAD/CAE-Data

CAD data


2D/3D Models 745-635

URL


Descărcare

Installation Notes


Supus modificărilor.

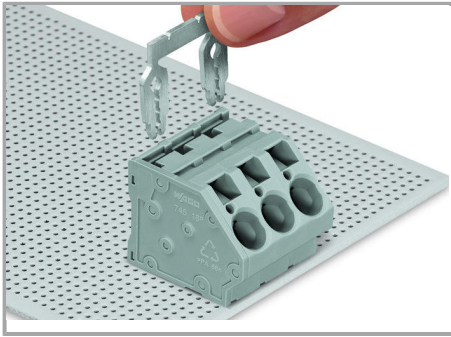

Inserting a comb-style jumper bar.

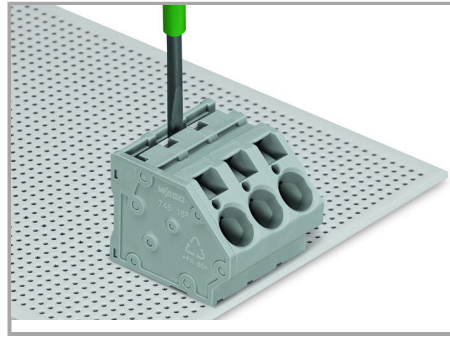

To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

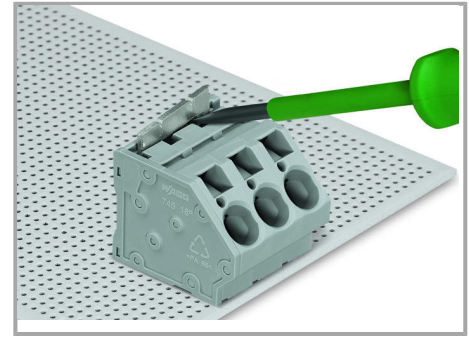

To remove the comb-style jumper bar, lift it up using a screwdriver – 745 Series.

Supus modificărilor.