


Supus modificărilor.

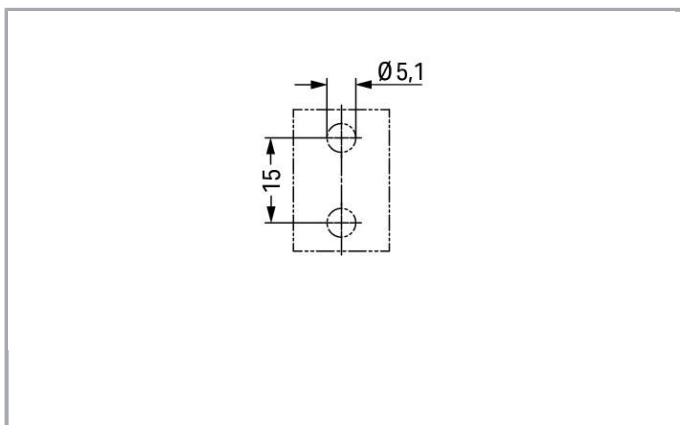

## Date

### Mechanical data

Mounting type	Screw mounting
Suitable	for distribution connector (except T-distribution connector); 2-pole

### Material Data

Color	white
Insulation material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0,049 MJ
Weight	1,6 g

### Environmental Requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures $\leq$ 105 °C

### Commercial data

Product Group	20 (WINSTA)
Packaging type	BOX
Country of origin	DE
GTIN	4045454684617
Customs tariff number	39269097900

### Counterpart

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG  
 /Representative Office Romania  
 Sos. Pipera-Tunari nr. 1/1  
 building 1, 2nd floor | 077190 Voluntari, Ilfov  
 Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?  
 Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.



## Descărcări

### CAD/CAE-Data

#### CAD data

2D/3D Models 890-1672

[URL](#)

[Descărcare](#)

#### CAE data

WSCAD Universe 890-1672

[URL](#)

[Descărcare](#)

## Installation Notes

## Familie de produse

*WINSTA*® MINI

[Afișare globală produse din familie.](#)

Supus modificărilor.