



**Date**

**Electrical data**

**Ratings per IEC/EN 60664-1**

Legend (ratings)

(III / 2) ≙ Overvoltage category III / Pollution degree 2

**Approvals per UL 1059**

Approvals per

UL 1059

**Connection data**

Number of connection types

1

Jumper assignment

5-way

**Geometrical Data**

Pin spacing

20 mm / 0.787 inch

Supus modificărilor.

## Mechanical data

Suitable

for 745 Series 745 – 16 mm<sup>2</sup> and 2706 Series

## Material Data

Contact material	Copper alloy
Contact plating	tin-plated
Weight	12,5 g

## Commercial data

Product Group	4 (Printed Circuit)
Packaging type	BOX
Country of origin	CH
GTIN	4044918303569
Customs tariff number	85366990990

## Counterpart

## Descărcări

### Documentation

#### Additional Information


Technical explanations

Apr 3, 2019

pdf  
3,6 MB


Descărcare

## Installation Notes

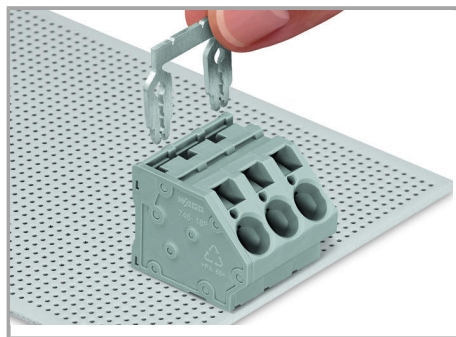


Inserting a comb-style jumper bar.

Supus modificărilor.

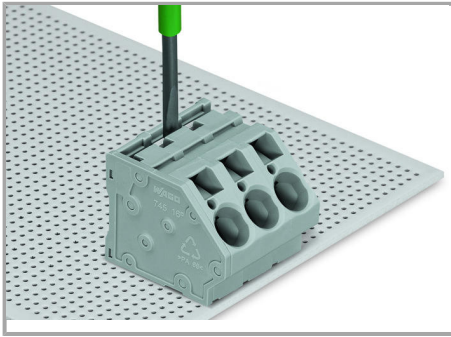

To insert a comb-style jumper bar, push it down using a screwdriver until it hits the backstop – 745 Series.

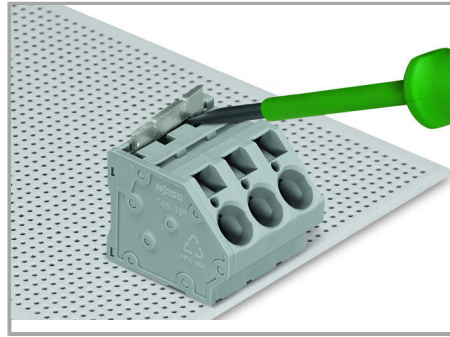

To remove the comb-style jumper bar, lift it up using a screwdriver – 745 Series.

Supus modificărilor.