

Date

Electrical data

Ratings per IEC/EN 60664-1

Nominal voltage (III/3)	500 V
Rated surge voltage (III/3)	4 kV
Rated current	10 A

Connection data

Connection technology	CAGE CLAMP®
-----------------------	-------------

Supus modificărilor.

Solid conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm ² / 28 ... 12 AWG
Strip length	9 mm / 0.35 inch
Wiring type	Front-entry wiring

Geometrical Data

Width	10.4 mm / 0.409 inch
Height	18.1 mm / 0.713 inch
Depth	20 mm / 0.787 inch

Material Data




Color	gray
Fire load	0,073 MJ
Weight	4 g

Commercial data

Product Group	12 (Matrix Patch Board)
Packaging type	BOX
Country of origin	DE
GTIN	4017332289306
Customs tariff number	85369010000

Aprobări / certificate

Country specific Approvals

Emblemă	Aprobare	Text de aprobare suplimentar	Nume certificat
	CCA DEKRA Certification B.V.	EN 60998	NTR NL- 7623
	CSA DEKRA Certification B.V.	C22.2,C22.2 No. 158	1101143
	KEMA/KEUR DEKRA Certification B.V.	EN 60998	71- 100850

Supus modificărilor.

Counterpart

Descărcări Documentation

Additional Information

Technical explanations

Apr 3, 2019

pdf
2,1 MB

[Descărcare](#)

CAD/CAE-Data

CAE data

EPLAN Data Portal 726-904

[URL](#)


[Descărcare](#)

WSCAD Universe 726-904

[URL](#)

[Descărcare](#)

Installation Notes

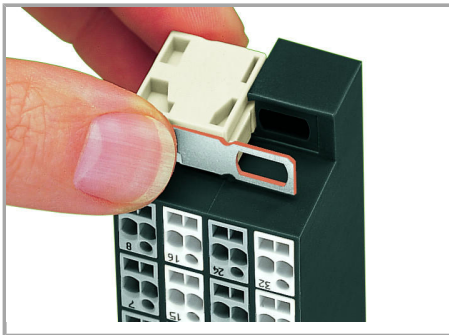

Snapping on an additional module with contact to mounting frame.



Assembling a matrix patchboard with additional module – direct connection to the mounting frame.

Supus modificărilor.