

Fișă tehnică | Număr articol: 280-854/281-415

Fuse plug; with soldered miniature fuse; with indicator lamp; LED (red); AC 15 - 30 V; 1 A FF; 5 mm wide; gray

www.wago.com/280-854/281-415



RoHS Compliant

[BOMcheck.net](https://www.bomcheck.net)

Culoare: ■

Descriere articol

Safety information 1:

Electrical ratings are given by the fuse and blown fuse indication.

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?

Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

Safety information 2:

Leakage current in case of a blown fuse: LED 5 ... 20 mA

Date**Electrical data****Ratings per IEC/EN 60664-1**

Nominal voltage (III/3)	125 V
Rated current	5 A

Geometrical Data

Width	5 mm / 0.197 inch
-------	-------------------

Mechanical data

Marking level	without marking level
---------------	-----------------------

Material Data

Color	gray
Insulation material	Polyamide 66 (PA 66)
Weight	2,7 g

Commercial data

Packaging type	BOX
GTIN	4017332292177

Counterpart**Produse compatibile****clamps****Nr. articol: 280-610**3-conductor carrier terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; graywww.wago.com/280-610**Nr. articol: 280-616**2-conductor carrier terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; graywww.wago.com/280-616**Nr. articol: 280-686**

Supus modificărilor.



4-conductor carrier terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/280-686



Nr. articol: 280-816

4-conductor carrier terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/280-816



Nr. articol: 280-916

2-conductor carrier terminal block; for DIN-rail 35 x 15 and 35 x 7.5; 2.5 mm²; CAGE CLAMP®; 2,50 mm²; gray

www.wago.com/280-916

Descărcări

Documentation

Additional Information

Technical explanations

Apr 3, 2019

pdf
2,1 MB

Descărcare

CAD/CAE-Data

CAE data

WSCAD Universe 280-854/281-415

URL


Descărcare

Installation Notes

Supus modificărilor.

WAGO Kontakttechnik GmbH & Co. KG
/Representative Office Romania
Sos. Pipera-Tunari nr. 1/1
building 1, 2nd floor | 077190 Voluntari, Ilfov
Tel.: +40-(0)31 421 85 68 | Email: info-RO@wago.com

Aveți întrebări despre produsele noastre?
Vă stăm la dispoziție pentru preluarea apelului la +40 (0) 31 421 85 68.

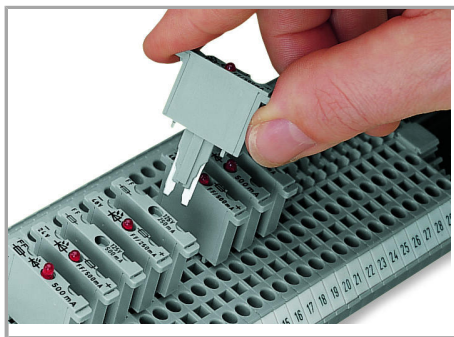


Using fuse plugs with rail-mount terminal blocks (280/281 and 769 Series) for control circuit protection is highly advantageous because the function and wiring levels are separated:

- No additional cost for assembly and wiring
-
- No risk of accidental contact with live parts when disconnecting the fuse plug
-
- Quick plug replacement in case of a blown fuse
-
- The fuse plug can be removed by service personnel
-
- No unintentional reclosing of the circuit by another person
-

Additional advantages:

- Terminal blocks/plugs provide ultra high-density wiring in a width of just 5 mm
-
- Optional LED indicates blown fuse
-

Supus modificărilor.

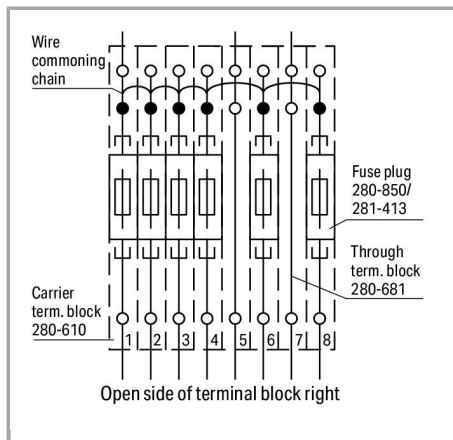

Fuse protection of individual outputs –
supply via wire commoning chain

Supus modificărilor.